### DELTA ELECTRONICS, INC. 252, SHANG YING ROAD, KUEI SAN TAOYUAN HSIEN 333, TAIWAN, R. O. C.

# SPECIFICATION FOR APPROVAL

TEL: 886-(0)3-3591968

FAX : 886-(0)3-3591991

Customer: STANDARD

Description: DC BLOWER

Customer P/N: REV:00

Delta Model NO.: BFB0712HHD77

Sample Rev: 00 Issue NO:

Sample Issue Date: MAY.15 2017 Quantity:

#### 1. SCOPE:

THIS SPECIFICATION DEFINES THE ELECTRICAL AND MECHANICAL CHARACTERISTICS OF THE DC BRUSHLESS BLOWER.

### 2. CHARACTERS:

ITEM	DESCRIPTION
RATED VOLTAGE	12.0 VDC
OPERATION VOLTAGE	9.0 - 16.0 VDC
INPUT CURRENT (AVG.)	0.53 (0.68 MAX.) A SAFETY CURRENT ON LABEL: 0.68 A
INPUT POWER (AVG.)	8.15 MAX ( 6.35 TYP. ) W
SPEED	5500±10% R.P.M.
MAX. AIR FLOW (AT ZERO STATIC PRESSURE)	0.41 ( MIN. 0.37) M <sup>3</sup> /MIN 14.7 ( MIN. 13.2) CFM
MAX.AIR PRESSURE (AT ZERO AIR FLOW)	35.9 ( MIN. 32.3 )mmH <sub>2</sub> 0 1.41 ( MIN. 1.27)inchH <sub>2</sub> 0
ACOUSTICAL NOISE (AVG.)	50 (MAX 53.5) dB-A(DISTANCE OF 1M)

(continued)


page: 1 A00

PART NO:	
DELTA MODEL:	BFB0712HHD77

INSULATION STRENGTH	10 MEG OHM MIN. AT 500 VDC (BETWEEN FRAME AND (+) TERMINAL)
DIELECTRIC STRENGTH	5 mA MAX. AT 500 VAC 50/60 Hz ONE MINUTE, (BETWEEN FRAME AND (+) TERMINAL)
ROTATION	COUNTERCLOCKWISE FROM AIR INTAKE SIDE

NOTES: 1. ALL READINGS ARE MEASURED AFTER STABLY WARMING UP THROUGH 10 MINUTES

- 2. STANDARD AIR PROPERTY IS AIR AT (Td) 25°C TEMPERATURE, (RH) 65% RELATIVE HUMIDITY, AND (Pb) 760 mmHg BAROMETRIC PRESSURE.
- 3. THE VALUES WRITTEN IN PARENS, ( ), ARE LIMITED SPEC.
- 4. ACOUSTICAL NOISE MEASURING CONDITION:

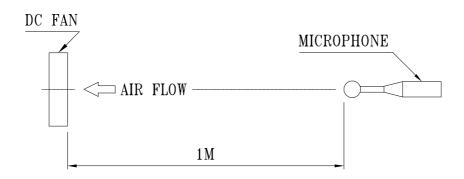

NOISE IS MEASURED AT RATED VOLTAGE IN FREE AIR IN ANECHOIC CHAMBER WITH B & K SOUND LEVEL METER WITH MICROPHONE AT A DISTANCE OF ONE METER FROM THE FAN INTAKE.

page: 2

PART NO:	
DELTA MODEL: BFB0712HHD77	
3. MECHANICAL:	
3-1. DIMENSIONS —	SEE DIMENSIONS DRAWING
3-2. FRAME	PLASTIC UL: 94V-0
3-3. IMPELLER —	PLASTIC UL: 94V-0
3-4. BEARING SYSTEM	TWO BALL BEARINGS
3-5. WEIGHT	85 GRAMS(Ref.)

#### 4. ENVIRONMENTAL:

- 4-3. OPERATING HUMIDITY 5 TO 90 % RH
- 4-4. STORAGE HUMIDITY ----- 5 TO 95 % RH

#### 5. PROTECTION:

#### 5-1. LOCKED ROTOR PROTECTION

IMPEDANCE OF MOTOR WINDING PROTECTS MOTOR FROM FIRE IN 96 HOURS OF LOCKED ROTOR CONDITION AT THE RATED VOLTAGE.

#### 5–2. POLARITY PROTECTION

BE CAPABLE OF WITHSTANDING IF REVERSE CONNECTION FOR POSITIVE AND NEGATIVE LEADS.

### 6. RE OZONE DEPLETING SUBSTANCES:

6-1. NO CONTAINING PBBs, PBBos, CFCs, PBBEs, PBDPEs AND HCFCs.


#### 7. PRODUCTION LOCATION

- 7-1. PRODUCTS WILL BE PRODUCED IN CHINA OR THAILAND.
- 8. THIS MODEL MUST MEET IP55 REQUEST COATING TO PROTECT WHOLE MOTOR ASSY

PART NO:

DELTA MODEL: BFB0712HHD77

# 9. P & Q CURVE:

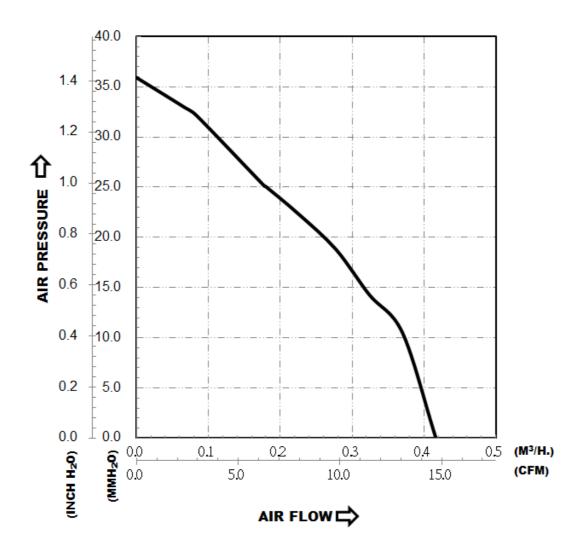

\* TEST CONDITION: INPUT VOLTAGE — OPERATION VOLTAGE TEMPERATURE HUMIDITY — ROOM TEMPERATURE 65%RH


PART NO:

DELTA MODEL: BFB0712HHD77

### 10. Attach: DIMENSIONS DRAWING

LABEL:



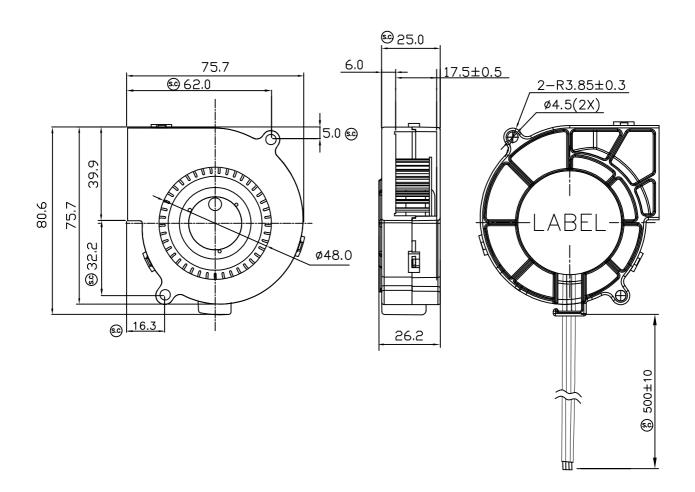

### NOTE.

1.THIS PRODUCT IS ROHS COMPLIANT.

2.LEAD WIRE FLRY-A AWG22

RED WIRE POSITIVE (+)

BLACK WIRE NEGATIVE (-)

BLUE WIRE PWM CONTROL (PWM)


PART NO:

### **DELTA MODEL:** BFB0712HHD77

#### 11. PWM CONTROL SIGNAL:

#### 11-1. PWM SPECIFICATION:

SIGNAL VOLTAGE RANGE: 0~16VDC

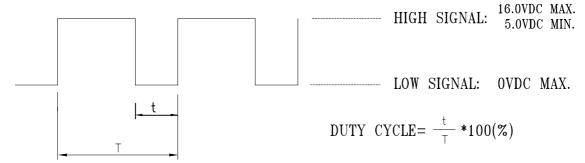

THE FAN WILL BE CONTROLLED USING A PULSE WIDTH MODULATED (PWM) SIGNAL FROM THE ELECTRONICS WITHIN THE ENCLOSURE. THE FAN MUST ACCEPT A CMOS COMPATIBLE PWM SIGNAL WITH A FREQUENCY RANGE OF 90HZ TO 110HZ. THE PWM SIGNAL WILL HAVE A DUTY CYCLE FROM 0% TO 100%. A 100% DUTY CYCLE WILL BE DEFINED AS A CONTINUOUS LOGIC HIGH ( $V_{INH}$ ) AND WILL CAUSE THE FAN TO STOP SPINNING. A DUTY CYCLE OF 0% WILL BE DEFINED AS A CONTINUOUS LOGIC LOW ( $V_{INL}$ ) AND WILL CAUSE THE FAN TO STOP SPINING. A DUTY CYCLE AT  $6\sim30\%,50\%,94\%$  THE FAN SPEED WILL BE 1700,2800,5500 RPM. IF THE PWM CONTROL WIRE IS OPEN,THE ROTOR WILL STOP SPINNING.

## 12. SPEED VS PWM WITHOUT LOAD (DC:12.0V): DUTY CYCLE TOLERANCE ±1%.

DUTY CYCLE (%)	SPEED R.P.M.
0~4	0
6~30	1700 ± 300
50	2800 ± 10%
94	5500 ± 10%
96~100	0

A00

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Delta Electronics: