

AC-DC Adapter

ADT-60W Series / ADT-060A□A□ B-A

ADT-060A



Highlights & Features

- Up to 89% efficiency
- Meet ErP Lot 7 & DoE VI
- No load power consumption < 0.15 W
- Over-Voltage/Load/Temperature & Short Circuit protections
- Limited Power Source (LPS) certified

Safety Standards



CB Certified for worldwide use

| | |
|--------------------------------|---|
| Model Number: | ADT-060A□A□ B-A |
| Unit Weight: | 180±10 grams (6.35±0.35 ounces) |
| Dimensions (W x L x H): | 46.0 x 108.0 x 29.5 mm (1.81 x 4.25 x 1.16 inch) |

General Description

The ADT-060A adapter comes with universal AC input at 85 Vac to 264 Vac. With the efficiency up to 89% and the extremely low no-load power consumption below 0.15 W, the ADT-060A is compliant with DoE level VI and ErP Lot 7 efficiency standard for energy savings. The supreme feature allows the adapter to save the energy when it is either under the operating mode or under the standby mode.

Model Information

| Model Number | Input Voltage Range | Rated Output Voltage | Rated Output Current |
|------------------|---------------------|----------------------|----------------------|
| ADT-060A12A□ B-A | 85-264 Vac | 12 Vdc | 5.0 A |
| ADT-060A15A□ B-A | | 15 Vdc | 4.0 A |
| ADT-060A19A□ B-A | | 19 Vdc | 3.2 A |
| ADT-060A24A□ B-A | | 24 Vdc | 2.5 A |

Model Numbering

| | | | | | | CC Code | |
|---------------------|---------------------------|-------------|--|-----------------------------------|---|---|----------------|
| ADT- | 060 | A | □ | A | □ | B- | A |
| Delta AC-DC Adapter | Output Power (60W series) | Family Code | Output Voltage (Single Output) 12 – 12 V 15 – 15 V 19 – 19 V 24 – 24 V | Package Type A – Power Adapter | Input Connector Type A – C6 (Class II with functional earth) B – C8 | Tuning fork 5.5 x 2.1 x 9.5 mm, 180° | Delta Standard |

AC-DC Adapter

ADT-60W Series / ADT-060A□□A□ B-A

Specifications

| Model Number | ADT-060A12A□□ B-A | ADT-060A15A□□ B-A | ADT-060A19A□□ B-A | ADT-060A24A□□ B-A |
|--------------|-------------------|-------------------|-------------------|-------------------|
|--------------|-------------------|-------------------|-------------------|-------------------|

Input Ratings / Characteristics

| | | | | | |
|--|---------|--------------------------------|------------|------------|------------|
| Nominal Input Voltage | | 100-240 Vac | | | |
| Input Voltage Range* | | 85-264 Vac | | | |
| Nominal Input Frequency | | 50-60 Hz | | | |
| Input Frequency Range | | 47-63 Hz | | | |
| Input Current | 115 Vac | 1.4 A max. | | | |
| | 230 Vac | 1.0 A max. | | | |
| Efficiency at 100% Load | 115 Vac | 87.6% typ. | 87.9% typ. | 88.1% typ. | 88.8% typ. |
| | 230 Vac | 90.2% typ. | 90.0% typ. | 90.3% typ. | 90.1% typ. |
| Average Efficiency (25%, 50%, 75%, 100%) | | 89% min. @ 115 Vac & 230 Vac | | | |
| Efficiency @ 10% load | | 79% @ 115 Vac & 230 Vac | | | |
| No Load Power Consumption | | 0.15 W max @ 115 Vac & 230 Vac | | | |
| Inrush Current | | No damage | | | |
| Leakage Current (max.) | | 0.1 mA @ 240 Vac / 50 Hz | | | |

*Output power is de-rated at low input voltage. Please refer to Fig. 3 on page 7

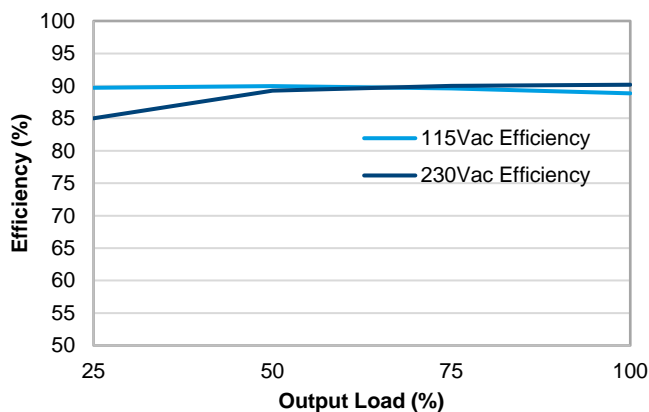


Fig. 1-1. ADT-060A12A Efficiency versus Output Load

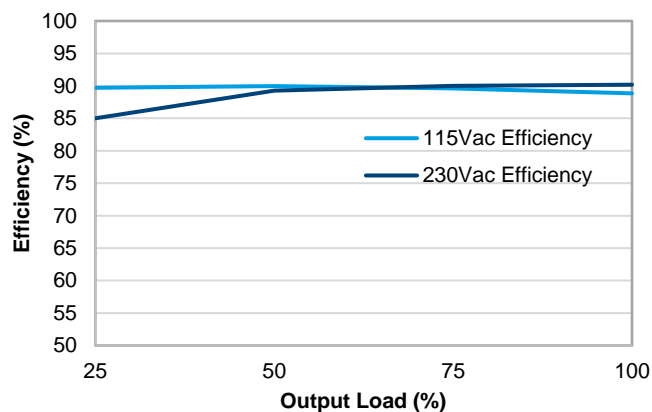


Fig. 1-2. ADT-060A15A Efficiency versus Output Load

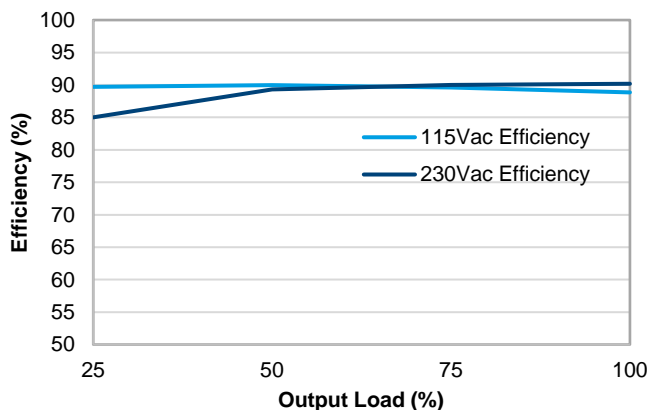


Fig. 1-3. ADT-060A19A Efficiency versus Output Load

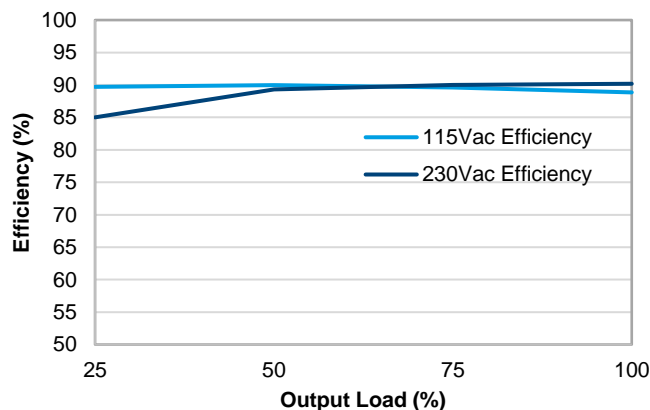


Fig. 1-4. ADT-060A24A Efficiency versus Output Load

AC-DC Adapter

ADT-60W Series / ADT-060A□A□ B-A

| Model Number | ADT-060A12A□ B-A | ADT-060A15A□ B-A | ADT-060A19A□ B-A | ADT-060A24A□ B-A |
|--------------|------------------|------------------|------------------|------------------|
|--------------|------------------|------------------|------------------|------------------|

Output Ratings / Characteristics

| | | | | | |
|------------------------|--------------|----------------|------------|------------|------------|
| Nominal Output Voltage | | 12 Vdc | 15 Vdc | 19 Vdc | 24 Vdc |
| Rated Output Current | | 5 A | 4 A | 3.2A | 2.5 A |
| Output Power | | 60 W | 60 W | 60.8 W | 60 W |
| Line Regulation | | ± 1% | | | |
| Load Regulation | | ± 5.0% | ± 4.0% | ± 3.0% | ± 2.5% |
| Combine Regulation | | ± 8.0% | ± 7.0% | ± 5.0% | ± 5.0% |
| PARD* (20MHz) | 0°C to 40°C | < 240 mVpp | < 300 mVpp | < 380 mVpp | < 480 mVpp |
| | -10°C to 0°C | < 480 mVpp | < 600 mVpp | < 760 mVpp | < 960 mVpp |
| Rise Time | 115 Vac | 30 mS (typ.) | | | |
| | 230 Vac | | | | |
| Start-up Time | 115 Vac | 1000 ms (typ.) | | | |
| | 230 Vac | 500 ms (typ.) | | | |
| Hold-up Time | 115 Vac | 12 ms (typ.) | | | |
| | 230 Vac | 60 ms (typ.) | | | |
| Capacitive load (max) | | 470 uF | | | |

*PARD is measured with an AC coupling mode, and in parallel with 0.1μF ceramic capacitor & 22μF electrolytic capacitor.

Mechanical

| | | | |
|----------------------------|--|--|--|
| Case | PC | | |
| Dimensions (W x L x H) | 46.0 x 108.0 x 29.5 mm (1.81 x 4.25 x 1.16 inch) | | |
| Unit Weight | 180±10 grams (6.35±0.35 ounces) | | |
| Cooling System | Convection | | |
| Output Cable Specification | Length: 1200 mm UL1571 | #16AWG | ADT-060A12AA B / ADT-060A12AB B |
| | | #18AWG | ADT-060A15AA B / ADT-060A15AB B |
| | | #20AWG | ADT-060A19AA B / ADT-060A19AB B ADT-060A24AA B / ADT-060A24AB B |
| Input Socket | C6 | ADT-060A12AA B ADT-060A15AA B ADT-060A19AA B ADT-060A24AA B | |
| | | C8 ADT-060A12AB B ADT-060A15AB B ADT-060A19AB B ADT-060A24AB B | |

AC-DC Adapter

ADT-60W Series / ADT-060A□A□ B-A

| Model Number | ADT-060A12A□ B-A | ADT-060A15A□ B-A | ADT-060A19A□ B-A | ADT-060A24A□ B-A |
|--------------|------------------|------------------|------------------|------------------|
|--------------|------------------|------------------|------------------|------------------|

Environment

| | | |
|-----------------------------|---------------|--|
| Surrounding Air Temperature | Operating | -10°C to +60°C (-20°C cold start @ 100% Load) |
| | Storage | -40°C to +85°C |
| Power De-rating | | > 40°C de-rating power by 2.5% / °C < 90Vac de-rating power by 2% / V |
| Operating Humidity | | 5 to 95% RH (Non-Condensing) |
| Storage Humidity | | 5 to 95% RH (Non-Condensing) |
| Operating Altitude | | Up to 5,000 meters (up to 16,400 feet) |
| Ball Impact Test | | Test height 130 cm, 1 sample 1 time, Steel Ball 500 g, Concrete floor |
| Drop Test | | Test height 100 cm, 6 face for each sample, concrete floor Function test pass after drop test |
| Shock Test | Non-Operating | Half sine wave, 50 G, 11 ms, 1 shocks for each direction, 6 direction |
| Vibration | Non-Operating | 5-500 Hz, 2.09 Grms, 20 minute for X,Y,Z axis |

Protections

| | | | | |
|--------------------------|--|----------------------------|----------------------------|----------------------------|
| Overvoltage | 13.2-18.0 V, Latch Mode | 16.5-22.5 V, Latch Mode | 20.9-28.5 V, Latch Mode | 26.4-36.0 V, Latch Mode |
| Overload / Overcurrent | 5.25-10.00 A | 4.20-8.00 A | 3.36-6.40 A | 2.625-5.00 A |
| | Auto-Recovery when the fault is removed | | | |
| Over Temperature | Latch Mode | | | |
| Short Circuit | Auto-Recovery when the fault is removed | | | |
| Protection Against Shock | ADT-060A12AA B ADT-060A15AA B ADT-060A19AA B ADT-060A24AA B | | Class II | |
| | ADT-060A12AB B ADT-060A15AB B ADT-060A19AB B ADT-060A24AB B | | | |

Reliability Data

| | |
|------------------------|---|
| MTBF | > 700,000 hrs. per Telcordia SR-332 at Input: 115 Vac, Output: 100% load, Ta: 25°C |
| Expected Cap Life Time | 5 years (50% load @ 25°C) |

AC-DC Adapter

ADT-60W Series / ADT-060A□□A□ B-A

| Model Number | ADT-060A12A□ B-A | ADT-060A15A□ B-A | ADT-060A19A□ B-A | ADT-060A24A□ B-A |
|--------------|------------------|------------------|------------------|------------------|
|--------------|------------------|------------------|------------------|------------------|

Safety Standards / Directives

| | | |
|----------------------------|---------------------------------------|---|
| Electrical Safety | CB scheme BSMI CCC PSE KC | IEC/UL/EN 60950-1; IEC/UL/EN 62368-1 CNS 14336-1 GB 4943.1-2011 J 60950-1(H29) K 60950-1 |
| Limited Power Source (LPS) | CB scheme | IEC 62368-1 |
| CE | | In conformance with EMC Directive 2014/30/EU and Low Voltage Directive 2014/35/EU |
| UKCA | | In conformance with Electromagnetic Compatibility Regulations 2016 and Electrical Equipment (Safety) Regulations 2016 |
| Galvanic Isolation | Input to Output | 3000 Vac |

EMC


| | | |
|--|----------------|---|
| Emissions (CE & RE) | | CISPR/EN/BS EN 55032 Class B BSMI CNS 13438 FCC Part 15, ICES-003, ANSI C63.4 GB/T9254- 2008 KN32 |
| Immunity | | EN/BS EN 55024; KN35 |
| Radiated and Conducted Emissions | | Conducted Emissions: EN/BS EN 55032 Class B Radiated Emissions: EN/BS EN 55032 Class B |
| Flicker and Voltage Fluctuation | | IEC 61000-3-3 |
| Harmonic Current Emissions | IEC 61000-3-2 | Class D; GB 17625.1-2003 |
| Electrostatic Discharge Standard | IEC 61000-4-2 | Criteria A ¹⁾ Air Discharge: 15 kV Contact Discharge: 8 kV |
| Radiated Field Immunity Test | IEC 61000-4-3 | Level 2 Criteria A ¹⁾ 80 MHz – 1 GHz, 3 V/M with 1 kHz tone / 80% modulation. |
| Fast Transient Burst Immunity | IEC 61000-4-4 | Level 2 Criteria A ¹⁾ : 1 kV |
| Surge Immunity Requirement | IEC 61000-4-5 | Level 3 Criteria A ¹⁾ Common Mode: 2 kV (12Ω) – For ADT-060A□□AA B-A model only Differential Mode: 1 kV (2Ω) |
| Conducted Immunity | IEC 61000-4-6 | Level 2 Criteria A ¹⁾ 150 kHz – 80 MHz, 3 Vrms |
| Power Frequency Magnetic Fields | IEC 61000-4-8 | Level 2 Criteria A ¹⁾ Magnetic field strength 3 A/m |
| Voltage Dips, Short Interruptions Immunity | IEC 61000-4-11 | Voltage Dips 70% reduction/0.5 periods (Criterion B) 40% reduction/5 periods (Criterion C) Voltage Short Interruptions 5% reduction/250 periods (Criterion C) |

1) Criteria A: Normal performance within the specification limits

2) Criteria B: Output out of regulation, or shuts down during test. Automatically restore to normal operation after test.

3) Criteria C: Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

W x L x H: 46.0 x 108.0 x 29.5 mm (1.81 x 4.25 x 1.16 inch)

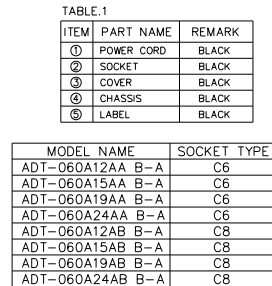

Output Load De-rating VS Surrounding Air Temperature

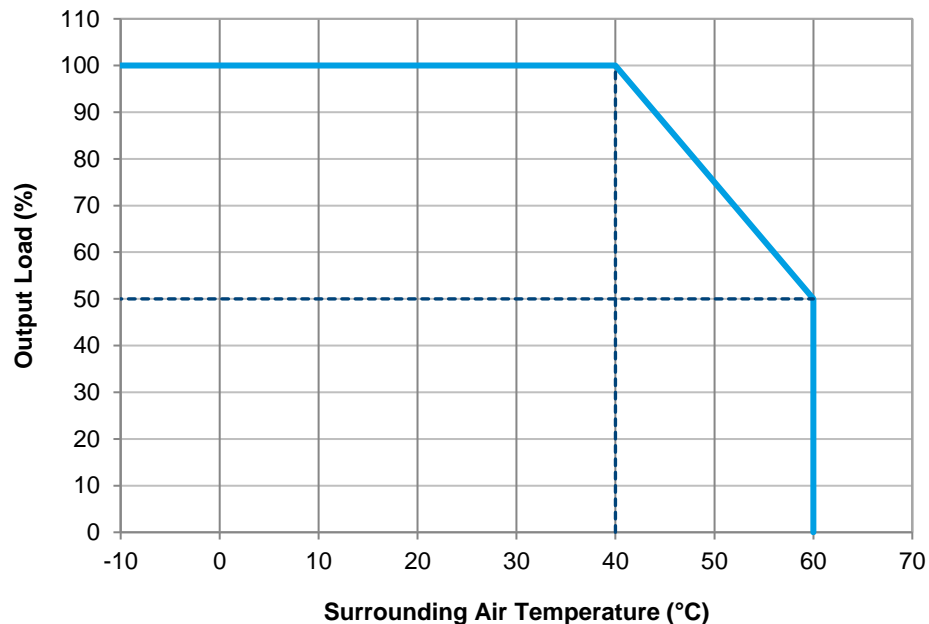


Fig. 2 De-rating for All Mounting Orientation (All Models)
 > 40°C de-rate power by 2.5% / °C

AC-DC Adapter

ADT-60W Series / ADT-060A□A□ B-A

Output Load De-rating VS Input Voltage

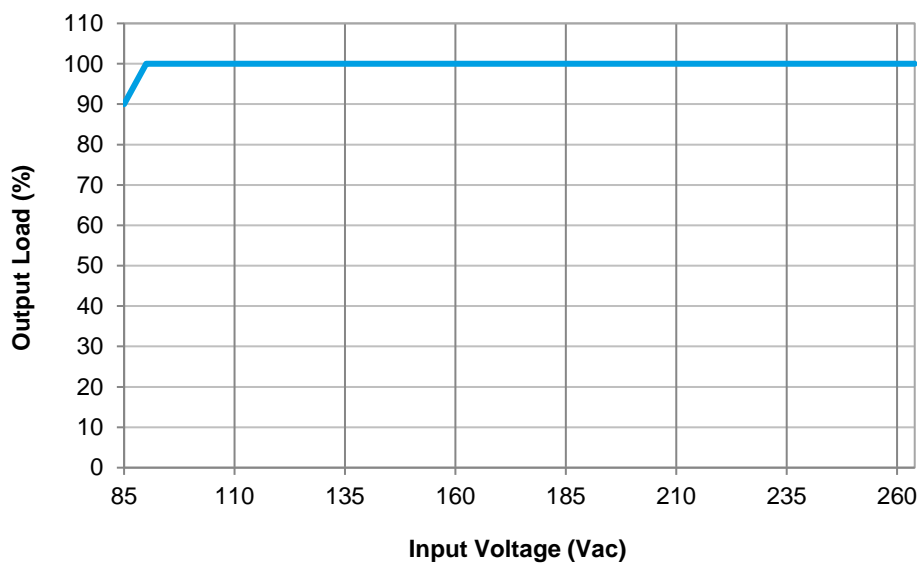


Fig. 3 De-rating for Low Input Voltage (All Models)
< 90Vac de-rate power by 2% / Vac


AC-DC Adapter

ADT-60W Series / ADT-060A□□A□ B-A

Others

PFC – Norm EN 61000-3-2

Line Current Harmonic content



Typically, the input current waveform is not sinusoidal due to the periodical peak charging of the input capacitor. In industrial environment, complying with EN 61000-3-2 is only necessary under special conditions. Complying to this standard can have some technical drawbacks, such as lower efficiency as well as some commercial aspects such as higher purchasing costs. Frequently, the user does not profit from fulfilling this standard, therefore, it is important to know whether it is mandatory to meet this standard for a specific application.

Attention

Delta provides all information in the datasheets on an “AS IS” basis and does not offer any kind of warranty through the information for using the product. In the event of any discrepancy between the information in the catalog and datasheets, the datasheets shall prevail (please refer to **www.DeltaPSU.com** for the latest datasheets information). Delta shall have no liability of indemnification for any claim or action arising from any error for the provided information in the datasheets. Customer shall take its responsibility for evaluation of using the product before placing an order with Delta.

Delta reserves the right to make changes to the information described in the datasheets without notice.

Manufacturer and Authorized Representatives Information

Manufacturer

Thailand

Delta Electronics (Thailand) PCL.
909 Pattana 1 Rd., Muang, Samutprakarn, 10280 Thailand

Taiwan

Delta Electronics, Inc.
3 Tungyuan Road, Chungli Industrial Zone, Taoyuan County
32063, Taiwan

Authorized Representatives

The Netherlands

Delta Greentech (Netherlands) B.V.
Zandsteen 15, 2132 MZ Hoofddorp, The Netherlands

United Kingdom

Delta Electronics Europe Limited
1 Redwood Court, Peel Park Campus,
East Kilbride, Glasgow, G74 5PF, United Kingdom

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Delta Electronics:](#)

[ADT-060A24AB B-A](#)