## Rev. 03.03.06 AEE 15W Series

# **AEE Series**

15 Watts

Total Power: 15 Watts Input Voltage: 12V, 24V or 48V # of Outputs: Single, Dual

## **Special Features**





# **Electrical Specifications**

Input	
Input range	9 to 36 VDC; 18 to 75 VDC
Efficiency <sup>2</sup>	84%@12Vo
Output	
Voltage tolerance	±2.0%
Line regulation	±0.5%
Load regulation	Single output: ±1.0%
	Dual output: ±TBD%
Noise/ripple	3.3Vo: 100mV
	5.0Vo: 100mV
	12Vo: 120mV
	15Vo: 120mV
Short circuit protection	Auto-restart
Switching frequency	300KHz
Temperature coefficient	±0.02 /°C
Isolation	
I/O isolation	1500 VDC min.
Insulation resistance	10Mohm
Insulation capacitance	1000pF
1	'

# Environmental Specifications Operating ambient temperature range -40°C to +71°

-40°C to +71°C (no derating)

Storage temperature -55°C to +105°C

Humidity 5% to 95% (non-condensing)

**MTBF** >1 Million hours

**RoHS Compliant** 





Rev. 03.03.06 AEE 15W Series 2 of 2

#### **Astec Power**

5810 Van Allen Way Carlsbad, CA 92008 USA

Telephone: +1 760 930 4600 Facsimile: +1 760 930 0698 Technical Support: +1 888 41 ASTEC

or +1 407 241 2752

Waterfront Business Park Merry Hill, Dudley West Midlands, DY5 1LX United Kingdom

Telephone: +44 (0) 1384 842 211 Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21 Tower 1, Metroplaza 223, Hing Fong Road Kwai Fong, New Territories Hong Kong

Telephone: +852 2437 9662 Facsimile: +852 2402 4426

For global contact, visit:

## www.astecpower.com technicalsupport@astec.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

#### **Emerson Network Power.**

The global leader in enabling business-critical continuity.

AC Power

Connectivity

DC Power

Embedded Power

Inbound Power

Integrated Cabinet Solutions

Outside Plant

Precision Cooling

Site Monitoring and Services


## EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co. ©2006 Emerson Electric Co.

Ordering Information					
Input Voltage	Output 1 Voltage	Output 2 Voltag	Maximum Power	Model Number	
9 -3 6V	3.3V @ 4A		13.2W	AEE04F18-L	
9 -3 6V	5V @ 3A		15W	AEE03A18-L	
9 -3 6V	12V @ 1.25A		15W	AEE01B18-L	
9 -3 6V	15V @ 1A		15W	AEE01C18-L	
9 -3 6V	5V @ 1.5A	-5V @ 1.5A	15W	AEE01AA18-L	
9 -3 6V	12V@ 0.625 A	-12V @ 0.625A	15W	AEE00BB18-L	
9 -3 6V	15V @ 0.5A	-15V @ 0.5A	15W	AEE00CC18-L	
18 - 75V	3.3V @ 4A		13.2W	AEE04F36-L	
18 - 75V	5V @ 3A		15W	AEE03A36-L	
18 - 75V	12V @ 1.25A		15W	AEE01B36-L	
18 - 75V	15V @ 1A		15W	AEE01C36-L	
18 - 75V	5V @ 1.5A	-5V @ 1.5A	15W	AEE01AA36-L	
18 - 75V	12V@ 0.625 A	-12V @ 0.625A	15W	AEE00BB36-L	
18 - 75V	15V @ 0.5A	-15V @ 0.5A	15W	AEE00CC36-L	

Please contact Astec for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.

#### Mechanical Drawing

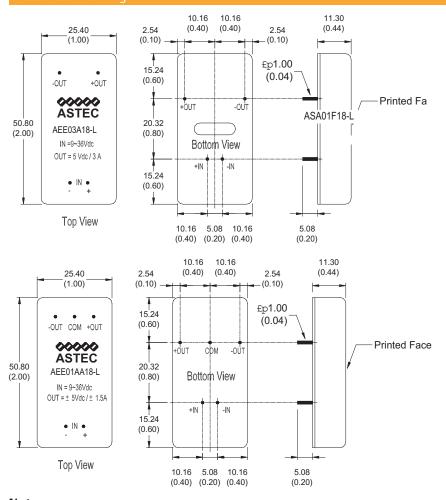

#### Notes:

- 1. All specifications subject to change without notice. Mechanical drawings are for reference only.
- 2. Warranty: 1 yr
- 3. Label and logo appearance may vary from what is shown on mechanical drawings.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Artesyn Embedded Technologies:

<u>AEE01AA36-L</u> <u>AEE01AA18-L</u> <u>AEE04F36-L</u> <u>AEE01C36-L</u> <u>AEE00BB36-L</u> <u>AEE01B36-L</u> <u>AEE04F18-L</u> <u>AEE00CC18-L</u> AEE00CC36-L AEE01C18-L AEE03A18-L AEE03BB18-L AEE03A36-L AEE01B18-L