
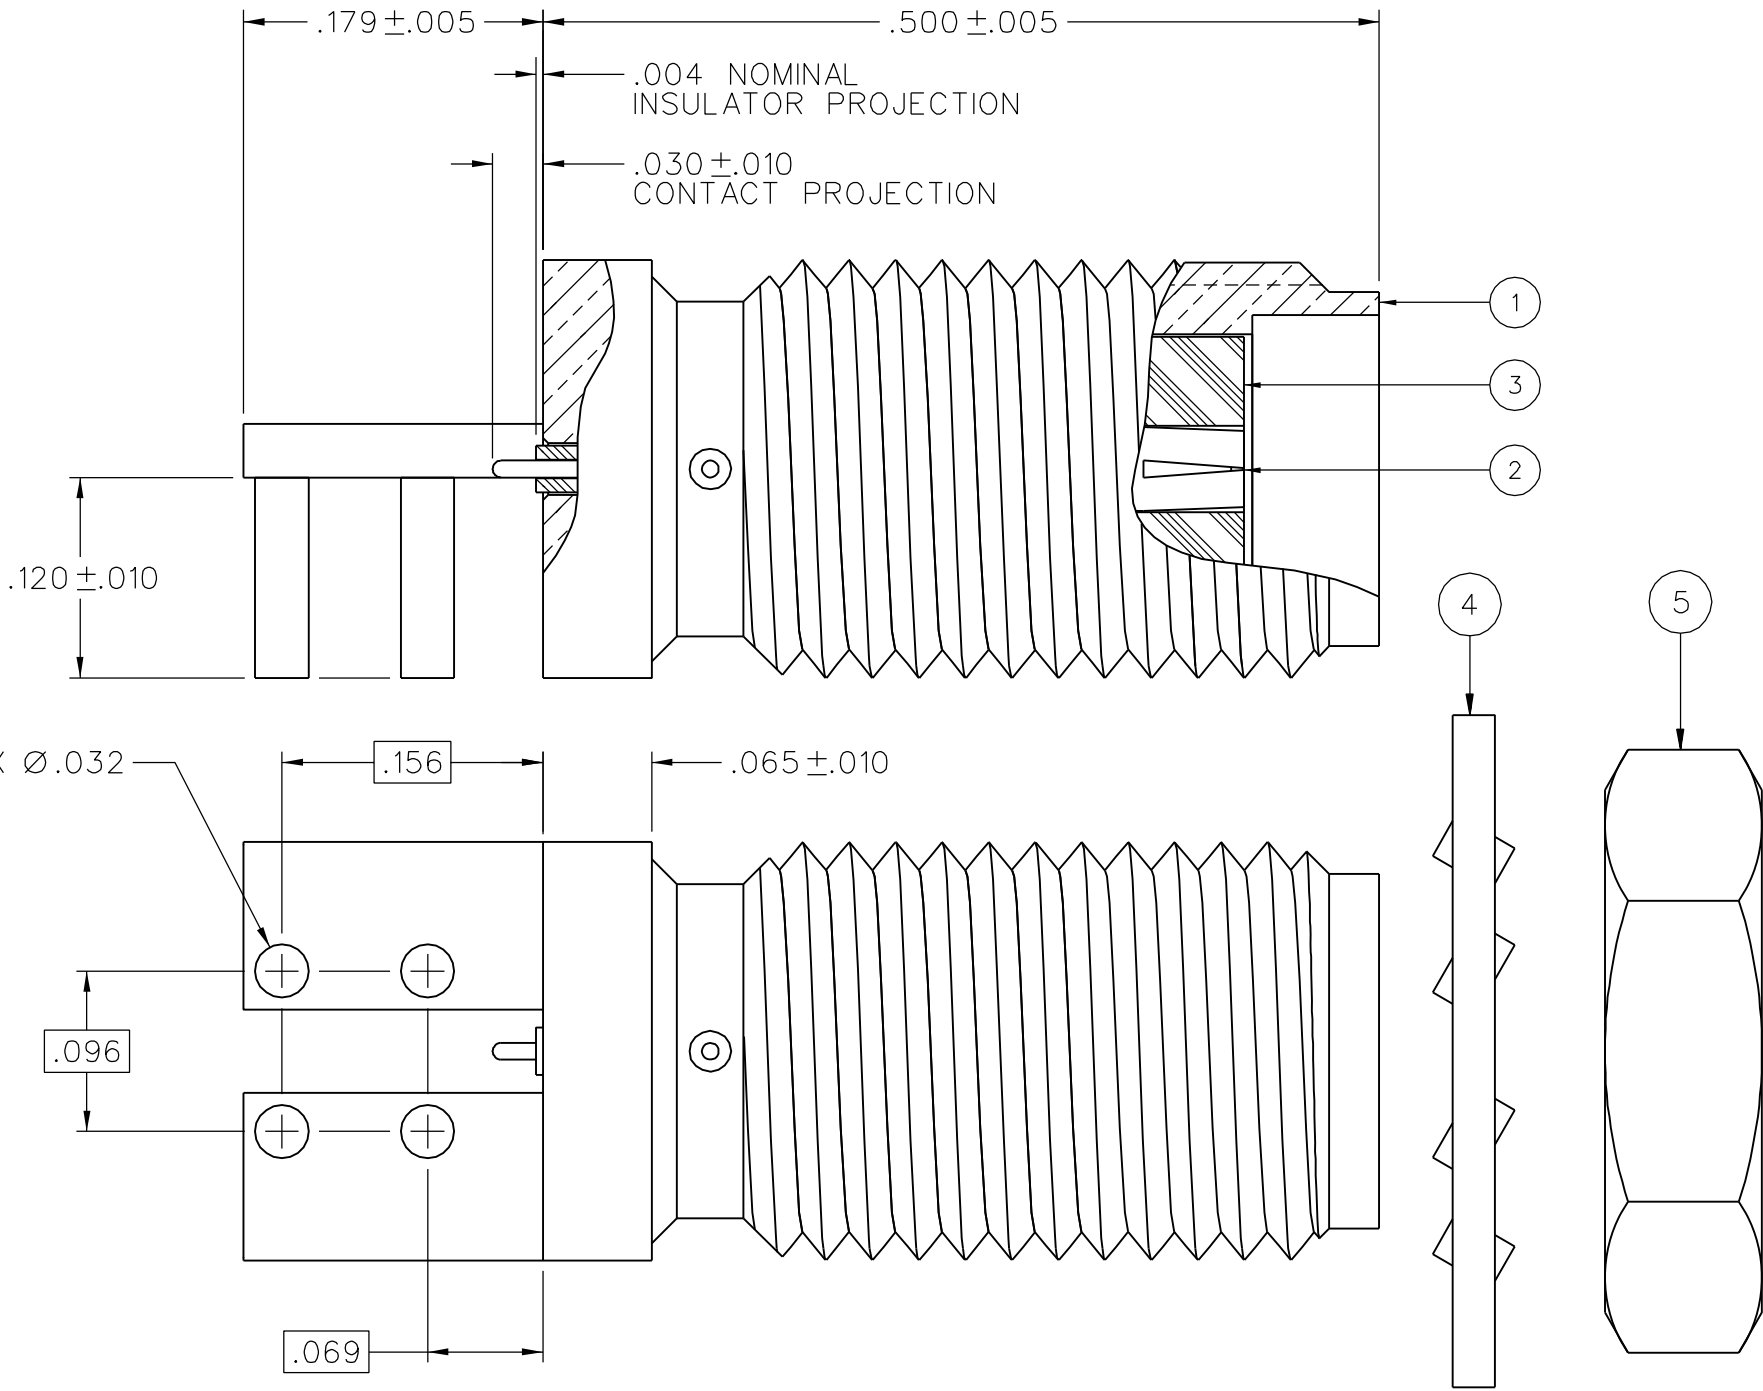


PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	ITEM ④ LOCKWASHER	ITEM ⑤ MOUNTING NUT
142-1711-801	BRASS GOLD PL .00001 MIN OVER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00005 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BRONZE GOLD PL .00001 MIN OVER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS GOLD PL .00001 MIN OVER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN

DRAWING NO.									
C - 142-1711-801/810									
0	REVISIONS								
ENGINEERING RELEASE									
A	2-28-12	C W	K N	R J	M J	2-28-12 ECO 54086			
DELETED NOTE 6									
002	4-23-15	M S	M L	R J	M J	4-23-15 ECO 55627			

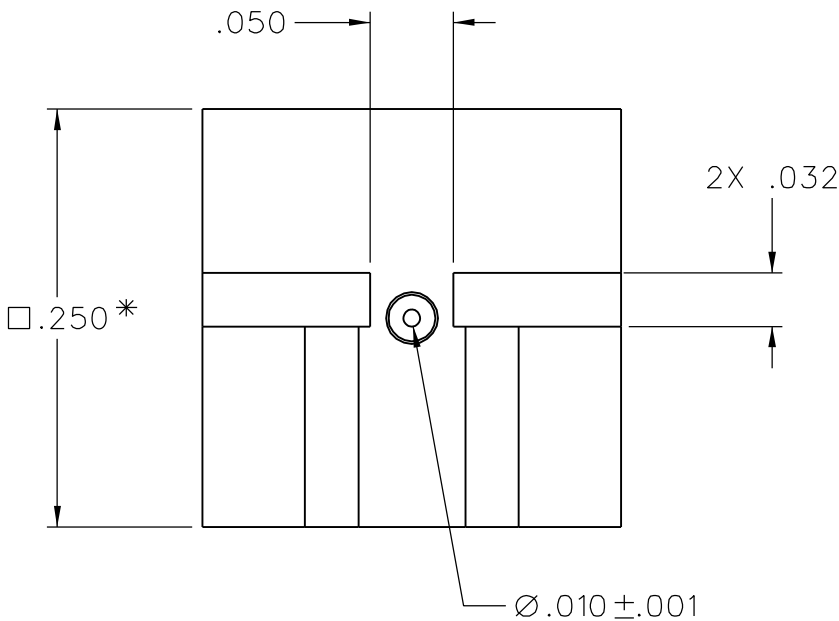

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS  
FREQUENCY RANGE: 0-26.5 GHz  
VSWR: 1.05+.02F(GHz) MAX AT 0-18 GHz  
WORKING VOLTAGE: 170 VRMS MAX AT SEA LEVEL  
DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN AT SEA LEVEL  
INSULATION RESISTANCE: 1000 MEGOHM MIN  
CONTACT RESISTANCE:  
CENTER CONTACT - INITIAL 3.0 MILLIOHM MAX, AFTER ENVIRONMENTAL 4.0 MILLIOHM MAX  
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX  
AFTER ENVIRONMENTAL NOT APPLICABLE  
CORONA LEVEL: 125 VOLTS MIN AT 70,000 FEET  
INSERTION LOSS: NOT APPLICABLE (DEPENDANT UPON APPLICATION)  
RF LEAKAGE: NOT APPLICABLE  
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 335 VRMS MIN AT 4 AND 7 MHz

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX  
MATING TORQUE: 7-10 INCH POUNDS WHEN BODY SUPPORTED WITH WRENCH  
\* 8 INCH POUNDS MAX UNSUPPORTED  
CONTACT RETENTION: 6 LBS MIN AXIAL FORCE ON MATING END  
4 IN-OZ MIN RADIAL TORQUE  
DURABILITY: 500 CYCLES MIN


ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-PRF-39012)  
THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B, EXCEPT 115°C HIGH TEMP  
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C  
CORROSION: MIL-STD-202, METHOD 101, CONDITION B  
SHOCK: MIL-STD-202, METHOD 213, CONDITION I  
VIBRATION: MIL-STD-202, METHOD 204, CONDITION D  
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106


- ②. ALL HOLES PLATED THRU ENTIRE CIRCUIT BOARD STACKUP.  
③. HOLE PATTERNS SYMMETRICAL ABOUT CENTER OF CPW TRACE.

4. FOR OPTIMUM CIRCUIT BOARD HIGH FREQUENCY PERFORMANCE:  
A. MAINTAIN SOLID GROUND PLANE BELOW HF SUBSTRATE.  
B. DO NOT PULLBACK TRACE AND GROUNDS FROM BOARD EDGE.  
C. CONTINUE GROUNDED COPLANAR LINE BEYOND GROUND PADS.  
D. PLACE 16 MIL DIA GROUND VIAS ON BOTH SIDES OF COPLANAR WAVEGUIDE LINE AT 50 MIL INTERVALS ALONG ENTIRE LENGTH.  
E. IMMERSION GOLD PLATE (ENIG) ALL CONDUCTORS PER IPC-4552.

- ⑤. REFERENCE DIMENSIONS FOR 50 OHM GROUNDED CPW LINE, USING ROGERS RO4003, 8 MIL HIGH FREQUENCY CIRCUIT BOARD SUBSTRATE:  
TRACE WIDTH = 16 MILS  
GROUND GAPS = 10 MILS  
CONDUCTOR THICKNESS = 1 MIL (INCLUDES PLATING)

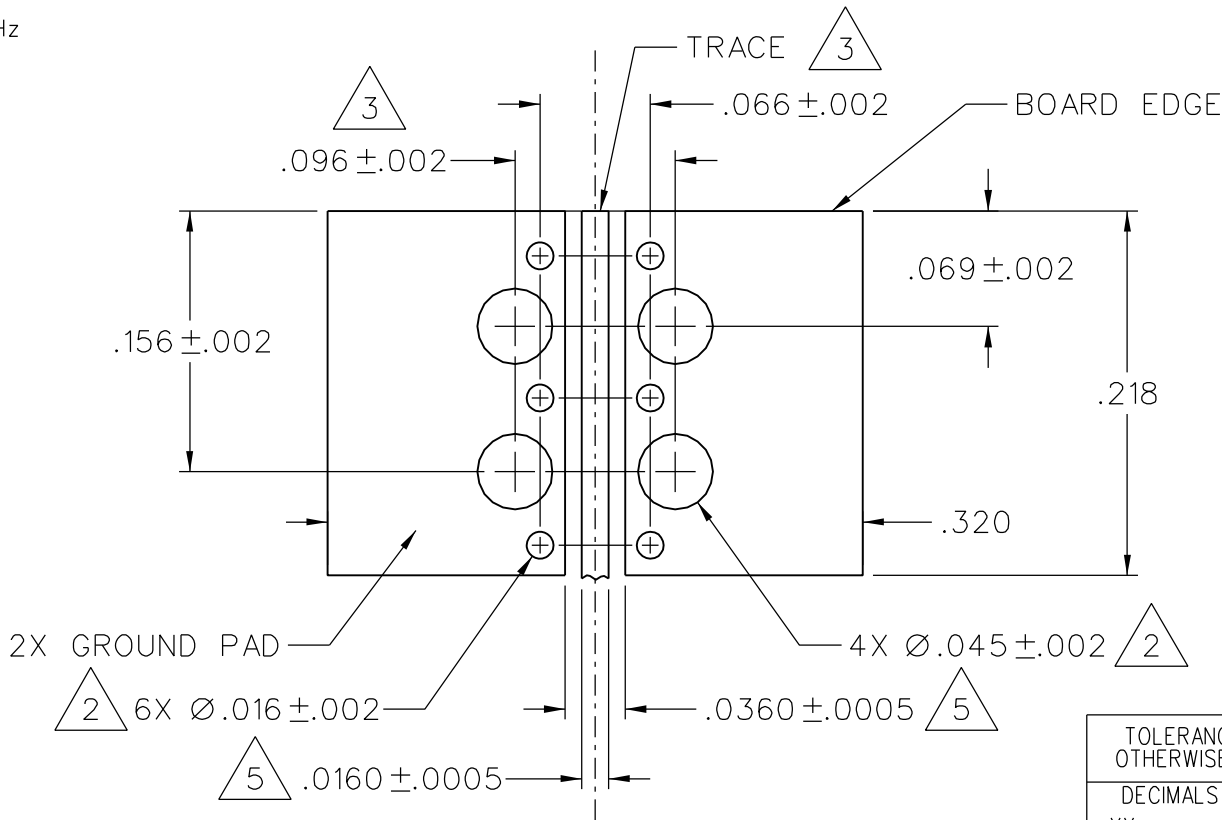

MOUNTING FOOTPRINT  
10:1 (TOP VIEW, INCLUDING TRACE DIMENSIONS)

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY R JØ		DATE 2-28-12		 <b>cinch</b> CONNECTIVITY SOLUTIONS a bel group	P.O. Box 1732 Waseca, MN 56093 1-800-247-8256	
DECIMALS .XX	mm	CHECKED BY		DATE			TITLE HIGH FREQ END LAUNCH SMA JACK ASSEMBLY, PC MOUNT, 10 MIL PIN	
.XXX ±.003		APPROVED BY RJB		DATE 4-20-12				
MATL		RELEASE DATE		4-20-12				
FINISH		U/M	INCH	SCALE	10:1	SHEET 2 OF 2	DRAWING NO. C - 142-1711-801/810	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[142-1711-801](#)