
RED INDICATES ORIGINAL


DATA CONTAINED IN THIS DOCUMENT IS
PROPRIETARY TO TROMPETER ELECTRONICS INC.
AND SHALL NOT BE DISCLOSED, COPIED OR USED
FOR PROCUREMENT OR MANUFACTURE WITHOUT
EXPRESS WRITTEN PERMISSION OF TROMPETER
ELECTRONICS INC.

		REVISIONS	[]	305-0029 SH) 1C	
ĺ	REV	DESCRIPTION		DATE APPROVE	3
	L	REVISED PER ECO #13616		11/6/00	

TABLE 1					
HZAD DN	DESCRIPTION				
-1	TERM (NO CHAIN)		ľ		
-2	TERM WITH 2.5 BRASS CHAIN		Ī		
-3	TERM WITH 2.5 NYLON CHAIN		ľ		
-4	TERM WITH 3.0 BRASS CHAIN	ļ	ľ		
- 5	TERM WITH 3.0 NYLON CHAIN		ľ		
-6	TERM WITH 6,0 BRASS CHAIN		ľ		
-7	TERM WITH 6.0 NYLON CHAIN		ľ		
-8	TERM WITH 4.0 BRASS CHAIN		ľ		
-9	TERM WITH 4.0 NYLON CHAIN		ľ		
-10	TERM WITH 10.0 BRASS CHAIN		ľ		
-11	TERM WITH 10.0 NYLON CHAIN				
-12	TERM WITH 2,5 SST ROPE	\triangle	_		
-13	TERM WITH 3.0 SST ROPE	A	•		
-14	TERM WITH 6.0 SST ROPE				
-15	TERM WITH 4.0 SST ROPE	Ī	•		
-16	TERM WITH 7.5 SST ROPE	豖			
-17	TERM WITH 4.5 SST ROPE	承			
			•		

	TABLE 2					
ĺ	HZAD UN	"A" DIA	"B" DIA	"C" DIM	"D" DIM	
	-D2	, 630	, 750	1.066	، 450	
	-D3	, 505	625 ،	, 941	,388	
	-04	,439	,562	, 878	. 355	
ì	-05	, 380	, 500	,816	, 325	
	-D6	.317	.437	، 753	, 295	
ļ	-07	, 281	406،	,722	278 ،	
	-D8	.610	، 750	1,066	,450	
	-D9	, 567	. 687	1,003	,419	
	-D10	, 192	.312	, 628	, 231	
l	-D11	1,005	1.125	1,441	, 638	
	-008	. 330	,450	. 766	.300	
7						



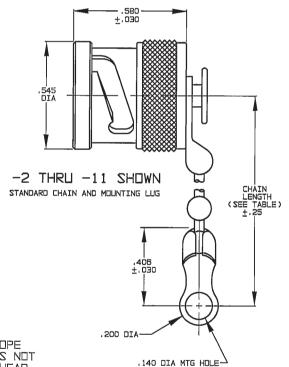


NOTE THAT LENGTH FOR SST ROPE WITH MOUNTING LUG OPTION IS NOT MEASURED TO CENTER OF BULKHEAD MOUNTING LUG

2. EXAMPLE OF COMPLETE MODEL NO:

-1/16 DIA BLACK NYLON JACKET OVER 3/64, 7X7 SST ROPE SST ROPE LENGTH (SEE TABLE 1) ±.25 .290 ±.010 DIA -12 THRU -17 STAINLESS STEEL ROPE AND MOUNTING LUG


XAM AIG ERZ.-

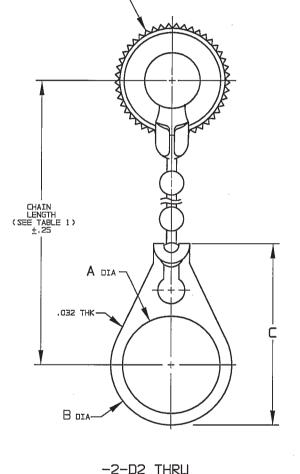

XAM AID ERZ,

-2-D2 THRU

-11-DD8 SHOWN STANDARD CHAIN AND BULKHEAD BULKHEAD JACK MOUNTING LUG

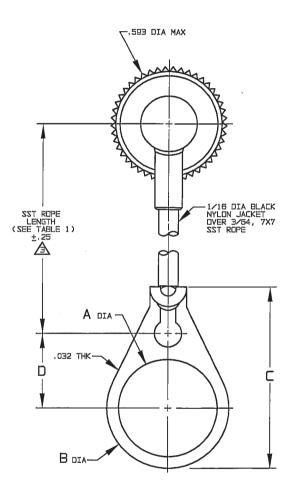


-12-D2 THRU

-17-DD8 SHOWN

STAINLESS STEEL ROPE AND BULKHEAD JACK MOUNTING LUG

MODEL NO BULKHEAD JACK MOUNTING RFI25 RFI75TL LUG (OPTION) AVAILABLE WITH BRASS, NYLON CHAIN DR SST ROPE (SEE TABLE 2) -CHAIN/ROPE MATL AND LENGTH (SEE TABLE 1)

1. MALE BNC/2-LUG TRB CAP WITH CHAIN/ROPE AND MOUNTING LUG OPTIONS

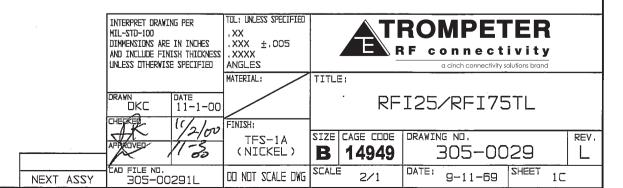

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cinch Connectivity Solutions: RFI75TL-12-D3