


# TET3600-48-104xA

## AC-DC Front End Power Supply

The TET3600-48-104xA is a 3600 W AC to DC power-factor-corrected (PFC) front end power supply that converts standard AC or HVDC power into a main output of 40 – 57 VDC for powering intermediate bus architectures (IBA) in high performance and reliability servers, routers, network switches and broadcast applications.

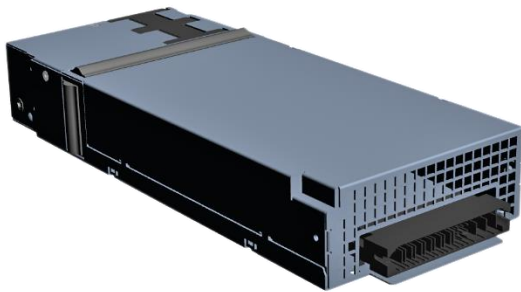

### Key Features & Benefits

- Very high efficiency, typ. 97% at half load
- Universal input voltage range: 90 – 264 VAC
- Adjustable output voltage 40 – 57 VDC
- AC input with power factor correction (PFC)
- 12 VDC standby output (model dependent)
- Hot-plug capable
- Parallel operation with active current sharing
- Digital controls for improved performance
- High density design: 56 W/in<sup>3</sup>
- Small form factor (W x H x L): 104 x 40 x 266 mm (4.09 x 1.57 x 10.47 in)
- I2C communication interface for control, programming and monitoring with Power Management Bus protocol
- Over temperature, output over voltage and overcurrent protection
- 2 Status LEDs: OK and FAIL with fault signaling
- Black Box recorder available

### Applications

- High Performance Servers
- Routers
- Switches
- Broadcast Applications

## 1. ORDERING INFORMATION

| TET            | 3600        | -    | 48        | -    | 104    | x                                     | A     | Option Code           |
|----------------|-------------|------|-----------|------|--------|---------------------------------------|-------|-----------------------|
| Product Family | Power Level | Dash | V1 Output | Dash | Width  | Airflow                               | Input |                       |
| TET Front-End  | 3600 W      |      | 48 V      |      | 104 mm | N: Normal<br>R: Reverse <sup>1)</sup> | A: AC | Blank: Standard model |

<sup>1)</sup> Front to Rear

## 2. OVERVIEW

The TET3600-48-104xA Series AC/DC power supply is combination of analog and DSP control, highly efficient front-end power supply. It incorporates resonance-soft-switching technology and interleaved power trains to reduce component stresses, providing increased system reliability and very high efficiency. With a wide input and output operational voltage range and minimal derating of output power with input voltage and temperature, the TET3600 power supply maximizes power availability in demanding server, network, and other high availability applications. The supply is fan cooled and ideally suited for integration with a matching airflow path.

The PFC stage is an analogue solution; MCU is used to communicate with DSP chip on secondary side. The DC/DC stage uses soft switching resonant techniques in conjunction with synchronous rectification. An active OR-ing device on the output ensures no reverse load current and renders the supply ideally suited for operation in redundant power systems. The always-on standby output, provides power to external power distribution and management controllers. It is protected with an active OR-ing device for maximum reliability. Status information is provided with front-panel LEDs.

In addition, the power supply can be controlled and the fan speed set via the I2C bus. The I2C bus allows full monitoring of the supply, including input and output voltage, current, power, and inside temperatures. The fan speed is adjusted automatically depending on the actual power demand and supply temperature and can be overridden through the I2C bus.

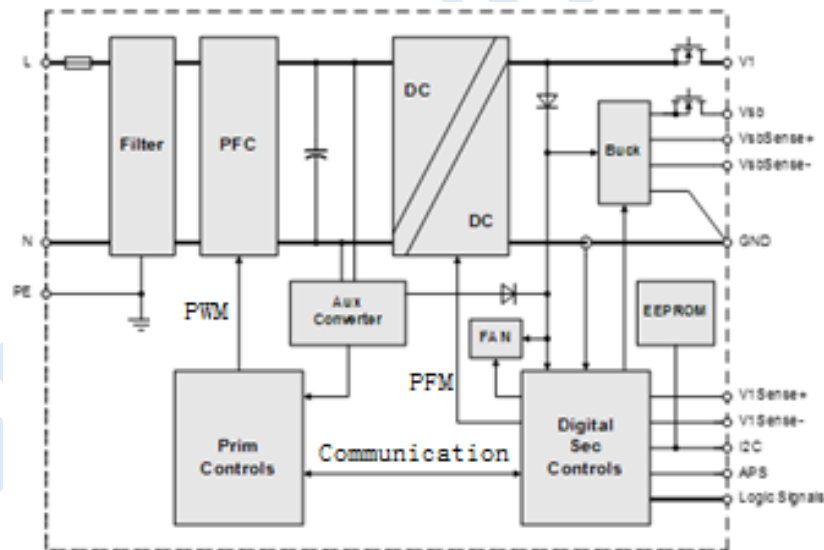


Figure 1. TET3600 Series Block Diagram

### 3. INPUT SPECIFICATIONS

General Condition:  $T_A = 0 \dots 45^\circ\text{C}$  unless otherwise specified.

| PARAMETER         | DESCRIPTION / CONDITION            |                                                                                                | MIN  | NOM   | MAX | UNIT             |
|-------------------|------------------------------------|------------------------------------------------------------------------------------------------|------|-------|-----|------------------|
| $V_{i\text{nom}}$ | Nominal Input Voltage              |                                                                                                | 100  |       | 240 | VAC              |
| $V_i$             | Input Voltage Range                | Normal operating ( $V_{i\text{min}}$ to $V_{i\text{max}}$ )                                    | 90   |       | 264 | VAC              |
| $V_{i\text{red}}$ | Derating Input Voltage Range       |                                                                                                | 90   |       | 180 | VAC              |
| $I_{i\text{max}}$ | Max Input Current                  |                                                                                                |      |       | 22  | A <sub>rms</sub> |
| $I_{i\text{p}}$   | Inrush Current Limitation          | $V_{i\text{min}}$ to $V_{i\text{max}}$ , $T_{\text{NTC}} = 25^\circ\text{C}$                   |      |       | 40  | A <sub>p</sub>   |
| $F_i$             | Input Frequency                    |                                                                                                | 47   | 50/60 | 64  | Hz               |
| $PF$              | Power Factor                       | $V_{i\text{nom}}$ , 50 Hz, $> 0.3 I_{i\text{nom}}$                                             | 0.96 |       |     | W/VA             |
| $V_{i\text{on}}$  | Turn-on Input Voltage <sup>1</sup> | Ramping up                                                                                     | 80   | 84    | 89  | VAC              |
|                   |                                    |                                                                                                | 169  | 174   | 180 | VDC              |
| $V_{i\text{off}}$ | Turn-off Input Voltage             | Ramping down                                                                                   | 75   | 80    | 85  | VAC              |
|                   |                                    |                                                                                                | 166  | 171   | 176 | VDC              |
| $\eta$            | Efficiency                         | $V_{i\text{nom}}$ , $0.1 \cdot I_{k\text{nom}}$ , $V_{x\text{nom}}$ , $T_A = 25^\circ\text{C}$ |      | 91    |     | %                |
|                   |                                    | $V_{i\text{nom}}$ , $0.2 \cdot I_{k\text{nom}}$ , $V_{x\text{nom}}$ , $T_A = 25^\circ\text{C}$ |      | 95    |     |                  |
|                   |                                    | $V_{i\text{nom}}$ , $0.5 \cdot I_{k\text{nom}}$ , $V_{x\text{nom}}$ , $T_A = 25^\circ\text{C}$ |      | 97    |     |                  |
|                   |                                    | $V_{i\text{nom}}$ , $I_{k\text{nom}}$ , $V_{x\text{nom}}$ , $T_A = 25^\circ\text{C}$           |      | 96    |     |                  |
| $T_{\text{hold}}$ | Hold-up Time                       |                                                                                                |      | 12    |     | ms               |

<sup>1</sup> The Front-End is provided with a minimum hysteresis of 3 V during turn-on and turn-off within the ranges.

## 4. OUTPUT SPECIFICATIONS

General Condition:  $T_a = 0 \dots 45^\circ\text{C}$  unless otherwise specified.

| PARAMETER                                 | DESCRIPTION / CONDITION  | MIN                                                                                                                                                                     | NOM   | MAX   | UNIT                  |
|-------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-----------------------|
| <b>Main Output <math>V_I</math></b>       |                          |                                                                                                                                                                         |       |       |                       |
| $V_{I\text{ nom}}$                        | Nominal Output Voltage   | 40                                                                                                                                                                      | 54    | 57    | VDC                   |
| $V_{I\text{ set}}$                        | Output Setpoint Accuracy | -0.5                                                                                                                                                                    |       | +0.5  | % $V_{I\text{ nom}}$  |
| $dV_{I\text{ tot}}$                       | Total Regulation         | $V_{I\text{ min}}$ to $V_{I\text{ max}}$ , 0 to 100% $I_{I\text{ nom}}$ , $T_a\text{ min}$ to $T_a\text{ max}$                                                          |       | +2    | % $V_{I\text{ nom}}$  |
| $P_{I\text{ nom}}$                        | Nominal Output Power     | 264 VAC > $V_{I\text{ in}} \geq 180$ VAC, $V_I = 54$ VDC                                                                                                                | 3600  |       | W                     |
|                                           | Refer to derating curves | 180 VAC > $V_{I\text{ in}} \geq 90$ VAC, $V_I = 54$ VDC                                                                                                                 | 1800  |       | W                     |
| $I_{I\text{ nom}}$                        | Nominal Output Current   | 264 VAC > $V_{I\text{ in}} \geq 180$ VAC, $V_I = 54$ VDC                                                                                                                | 67    |       | ADC                   |
|                                           | Refer to derating curves | 180 VAC > $V_{I\text{ in}} \geq 90$ VAC, $V_I = 12$ VDC                                                                                                                 | TBD   |       | ADC                   |
| $V_{I\text{ pp}}$                         | Output Ripple Voltage    | $V_{I\text{ nom}}$ , $I_{I\text{ nom}}$ , 20 MHz BW                                                                                                                     |       | 120   | mVpp                  |
| $dV_{I\text{ Load}}$                      | Load Regulation          | $V_I = V_{I\text{ nom}}$ , 0 - 100 % $I_{I\text{ nom}}$                                                                                                                 | 300   |       | mV                    |
| $dV_{I\text{ Line}}$                      | Line Regulation          | $V_I = V_{I\text{ min}} \dots V_{I\text{ max}}$                                                                                                                         | 0     |       | mV                    |
| $dI_{\text{share}}$                       | Current Sharing          | Deviation from $I_{I\text{ tot}} / N$ , $I_I > 10\%$                                                                                                                    | -2    | +2    | A                     |
| $dV_{I\text{ dyn}}$                       | Dynamic Load Regulation  | $\Delta I_I = 50\% I_{I\text{ nom}}$ , $I_I = 5 \dots 100\% I_{I\text{ nom}}$ , $dI_I/dt = 1\text{A}/\mu\text{s}$                                                       | -2.0  | 2.0   | V                     |
| $T_{\text{rec}}$                          | Recovery Time            | $\Delta I_I = 50\% I_{I\text{ nom}}$ , $I_I = 5 \dots 100\% I_{I\text{ nom}}$ , $dI_I/dt = 1\text{A}/\mu\text{s}$ , recovery within 1% of $V_{I\text{ nom}}$            |       | 1.5   | ms                    |
| $t_{\text{AC } V_I}$                      | Start-up Time from AC    |                                                                                                                                                                         |       | 3     | sec                   |
| $t_{V_I\text{ rise}}$                     | Rise Time                | $V_I = 10 \dots 90\% V_{I\text{ nom}}$                                                                                                                                  | 0.5   | 10    | ms                    |
| $C_{\text{Load}}$                         | Capacitive Loading       | $T_a = 25^\circ\text{C}$                                                                                                                                                |       | 30000 | $\mu\text{F}$         |
| <b>Standby Output <math>V_{SB}</math></b> |                          |                                                                                                                                                                         |       |       |                       |
| $V_{SB\text{ nom}}$                       | Nominal Output Voltage   | $0.5 \cdot V_{SB\text{ nom}}$ , $T_{\text{amb}} = 25^\circ\text{C}$                                                                                                     | 12    |       | VDC                   |
| $V_{SB\text{ set}}$                       | Output Setpoint Accuracy |                                                                                                                                                                         | -1    | +1    | % $V_{SB\text{ nom}}$ |
| $dV_{SB\text{ tot}}$                      | Total Regulation         | $V_{I\text{ min}}$ to $V_{I\text{ max}}$ , 0 to 100% $I_{SB\text{ nom}}$ , $T_a\text{ min}$ to $T_a\text{ max}$                                                         | -3    | +3    | % $V_{SB\text{ nom}}$ |
| $P_{SB\text{ nom}}$                       | Nominal Output Power     | $V_{SB} = 12$ VDC                                                                                                                                                       | 36    |       | W                     |
| $I_{SB\text{ nom}}$                       | Nominal Output Current   | $V_{SB} = 12$ VDC                                                                                                                                                       | 2.5   |       | A                     |
| $V_{SB\text{ pp}}$                        | Output Ripple Voltage    | $V_{SB\text{ nom}}$ , $I_{SB\text{ nom}}$ , 20 MHz BW                                                                                                                   | 6     |       | mVpp                  |
| $dV_{SB}$                                 | Droop                    | 0 - 100 % $I_{SB\text{ nom}}$                                                                                                                                           | 100   |       | mV                    |
| $dV_{SB\text{ dyn}}$                      | Dynamic Load Regulation  | $\Delta I_{SB} = 50\% I_{SB\text{ nom}}$ , $I_{SB} = 5 \dots 100\% I_{SB\text{ nom}}$ , $dI_{SB}/dt = 1\text{A}/\mu\text{s}$ , recovery within 1% of $V_{I\text{ nom}}$ | -0.25 | 0.25  | V                     |
| $T_{\text{rec}}$                          | Recovery Time            |                                                                                                                                                                         |       | 0.5   | ms                    |
| $t_{\text{AC } V_{SB}}$                   | Start-up Time from AC    | $V_{SB} = 90\% V_{SB\text{ nom}}$                                                                                                                                       |       | 2     | s                     |
| $t_{V_{SB}\text{ rise}}$                  | Rise Time                | $V_{SB} = 10 \dots 90\% V_{SB\text{ nom}}$                                                                                                                              |       | 20    | ms                    |
| $C_{\text{Load}}$                         | Capacitive Loading       | $T_{\text{amb}} = 25^\circ\text{C}$                                                                                                                                     |       | 1500  | $\mu\text{F}$         |

## 5. PROTECTION SPECIFICATIONS

| PARAMETER      |                                  | DESCRIPTION / CONDITION                                                                               | MIN      | NOM | MAX        | UNIT               |
|----------------|----------------------------------|-------------------------------------------------------------------------------------------------------|----------|-----|------------|--------------------|
| $F$            | Input Fuse (L)                   | Not user accessible, quick-acting (F)                                                                 |          | 30  |            | A                  |
| $V_{I\ OV}$    | OV Threshold $V_I$               |                                                                                                       | 60       |     | 62         | VDC                |
| $t_{OV\ V1}$   | OV Latch Off Time $V_I$          |                                                                                                       |          |     | 1          | ms                 |
| $V_{SB\ OV}$   | OV Threshold $V_{SB}$            |                                                                                                       | 13       |     | 13.5       | % $V_{SB}$         |
| $t_{OV\ VSB}$  | OV Latch Off Time $V_{SB}$       |                                                                                                       |          |     | 1          | ms                 |
| $I_{I1\ lim}$  | Over Current Limitation $V_I$    | $V_I > 180\text{ VAC},\ T_a < 45^{\circ}\text{C}$<br>$V_I > 90\text{ VAC},\ T_a < 45^{\circ}\text{C}$ | 69<br>36 |     | 72<br>37.5 | A                  |
| $I_{VSB\ lim}$ | Over Current Limitation $V_{SB}$ | $T_a < 45^{\circ}\text{C}$ for 12 $V_{SB}$                                                            | 3        |     | 3.2        | A                  |
| $I_{I1\ SC}$   | Max Short Circuit Current $V_I$  | $V_I < 3\text{ V}$                                                                                    |          |     | 200        | A                  |
| $t_{I1\ SC}$   | Short Circuit Regulation Time    | $V_I < 3\text{ V}$ , time until $I_{I1}$ is limited to $< I_{I1\ SC}$                                 |          |     | 2          | ms                 |
| $T_{SD}$       | Over Temperature on Heat Sinks   | Automatic shut-down                                                                                   |          | 115 | 120        | $^{\circ}\text{C}$ |

## 6. MONITORING

| PARAMETER     |                    | DESCRIPTION / CONDITION             | MIN  | NOM | MAX  | UNIT |
|---------------|--------------------|-------------------------------------|------|-----|------|------|
| $V_{I\ mon}$  | Input RMS Voltage  | $V_{I\ min} \leq V \leq V_{I\ max}$ | -2.5 |     | +2.5 | %    |
| $I_{I\ mon}$  | Input RMS Current  | $I_I > 2\ A_{rms}$                  | -5   |     | +5   | %    |
| $P_{I\ mon}$  | True Input Power   | $I_I > 2\ A_{rms}$                  | -5   |     | +5   | %    |
| $V_{I1\ mon}$ | $V_{I1}$ Voltage   |                                     | -2   |     | +2   | %    |
| $I_{I1\ mon}$ | $V_{I1}$ Current   | $I_{I1} > 25\ A$                    | -2   |     | +2   | %    |
|               |                    | $I_{I1} \leq 25\ A$                 | -1   |     | +1   | A    |
| $P_{O\ nom}$  | Total Output Power | $P_o > 120\ W$                      | -5   |     | +5   | %    |
|               |                    | $P_o \leq 120\ W$                   | -12  |     | +12  | W    |
| $V_{SB\ mon}$ | Standby Voltage    |                                     | -0.5 |     | +0.5 | V    |
| $I_{SB\ mon}$ | Standby Current    | $I_{SB} \leq I_{SB\ nom}$           | -0.5 |     | +0.5 | A    |

## 7. SAFETY APPROVALS

Maximum electric strength testing is performed in the factory according to IEC/EN 60950, and UL 60950. Input-to-output electric strength tests should not be repeated in the field. Bel Power Solutions will not honor any warranty claims resulting from electric strength field tests.

| PARAMETER                     | DESCRIPTION / CONDITION                                                                                                             | MIN                                               | NOM | MAX | UNIT |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----|-----|------|
| Agency Approvals              | UL 60950-1 Second Edition<br>CAN/CSA-C22.2 No. 60950-1-07 Second Edition<br>IEC 60950-1:2005<br>EN 60950-1:2006<br>EN 62368-1: 2014 | Approved by independent body (see CE Declaration) |     |     |      |
| Isolation Strength            | Input (L/N) to case (PE)<br>Input (L/N) to output<br>Output to case (PE)                                                            | Basic<br>Reinforced<br>Functional                 |     |     |      |
| $\alpha$ Creepage / Clearance | Primary (L/N) to protective earth (PE)<br>Primary to secondary                                                                      | According to safety standard                      |     |     | mm   |
| Electrical Strength Test      | Input to case<br>Input to output<br>Output and Signals to case                                                                      | According to safety standard                      |     |     | kVAC |

## 8. ELECTROMAGNETIC COMPATIBILITY

### 8.1 IMMUNITY

**NOTE:** Most of the immunity requirements are derived from EN 55024:1998/A2:2003.

| PARAMETER                      | DESCRIPTION / CONDITION                                                                                                                                                                                               | CRITERION                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| ESD Contact Discharge          | IEC / EN 61000-4-2, $\pm 8$ kV, 25+25 discharges per test point (metallic case, LEDs, connector body)                                                                                                                 | A                                 |
| ESD Air Discharge              | IEC / EN 61000-4-2, $\pm 15$ kV, 25+25 discharges per test point (non-metallic user accessible surfaces)                                                                                                              | A                                 |
| Radiated Electromagnetic Field | IEC / EN 61000-4-3, 10 V/m, 1 kHz/80% Amplitude Modulation, 1 $\mu$ s Pulse Modulation, 10 kHz...2 GHz                                                                                                                | A                                 |
| Burst                          | IEC / EN 61000-4-4, level 3<br>AC port $\pm 2$ kV, 1 minute<br>DC port $\pm 1$ kV, 1 minute                                                                                                                           | A                                 |
| Surge                          | IEC / EN 61000-4-5<br>Line to PE level 3, $\pm 2$ kV<br>Line to line: level 2, $\pm 1$ kV<br>NEBS GR-1089-CORE<br>Line to PE and line to line $\pm 2$ kV/2 $\Omega$                                                   | A                                 |
| RF Conducted Immunity          | IEC/EN 61000-4-6, Level 3, 10 Vrms, CW, 0.1 ... 80 MHz                                                                                                                                                                | A                                 |
| Voltage Dips and Interruptions | IEC/EN 61000-4-11<br>1: $V_i$ 230 V, 100% Load, Phase 0°, Dip 100%, Duration 10 ms<br>2: $V_i$ 230 V, 100% Load, Phase 0°, Dip 100%, Duration 20 ms<br>3: $V_i$ 230 V, 100% Load, Phase 0°, Dip 100%, Duration >20 ms | A<br>$V_{SB}$ : A, $V_1$ : B<br>B |

### 8.2 EMISSION

| PARAMETER          | DESCRIPTION / CONDITION                                                          | CRITERION |
|--------------------|----------------------------------------------------------------------------------|-----------|
| Conducted Emission | EN55032/ CISPR 22: 0.15 ... 30 MHz, QP and AVG,                                  | Class A   |
| Radiated Emission  | EN55032/ CISPR 22: 30 MHz ... 1 GHz, QP,                                         | Class A   |
| Harmonic Emissions | IEC61000-3-2, $V_{in}$ = 115 VAC / 60 Hz, & $V_{in}$ = 230 VAC/ 50 Hz, 100% Load | Class A   |
| AC Flicker         | IEC61000-3-3, $V_{in}$ = 230 VAC / 60 Hz, 100% Load                              | Pass      |

## 9. ENVIRONMENTAL SPECIFICATIONS

| PARAMETER  | DESCRIPTION / CONDITION | MIN                                                                         | NOM | MAX   | UNIT |
|------------|-------------------------|-----------------------------------------------------------------------------|-----|-------|------|
| $T_A$      | Ambient Temperature     | $V_{min}$ to $V_{max}$ , $I_{nom}$ , $I_{SB nom}$ below 6000 feet Altitude  |     | +50   | °C   |
|            |                         | $V_{min}$ to $V_{max}$ , $I_{nom}$ , $I_{SB nom}$ below 15000 feet Altitude |     | +40   | °C   |
| $T_{Aext}$ | Extended Temp. Range    | Derating output                                                             |     | +65   | °C   |
| $T_S$      | Storage Temperature     | Non-operational                                                             |     | +70   | °C   |
|            | Altitude                | Operational, above Sea Level, refer derating to $T_A$                       |     | 15000 | Feet |
| $N_a$      | Audible Noise           | $V_{nom}$ , 50% $I_{o nom}$ , $T_A$ = 25°C measured at bystander position   | 62  |       | dBA  |

## 10. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | MIN | NOM                                   | MAX | UNIT     |
|-----------|-------------------------|-----|---------------------------------------|-----|----------|
|           | Dimensions (W x H x L)  |     | 104 x 40 x 266<br>4.09 x 1.57 x 10.47 |     | mm<br>in |
| $M$       | Weight                  |     | TBD                                   |     | kg       |

## 11. CONNECTIONS

### AC INPUT, DC OUTPUT AND SIGNALS CONNECTOR:

PSU side: FCI Pwr Blade ULTRA # TBD

Receptacle: FCI Pwr Blade ULTRA #TBD

|   | POWER OUTPUT |    |                |    | SIGNALS |   |   |   |   |   |   |   | POWER INPUT |    |    |
|---|--------------|----|----------------|----|---------|---|---|---|---|---|---|---|-------------|----|----|
|   | P1           | P2 | P3             | P4 | 1       | 2 | 3 | 4 | 5 | 6 | 7 | 8 | P5          | P6 | P7 |
| C | 54 V         |    | 54 V<br>Return |    |         |   |   |   |   |   |   |   | PE          | N  | L  |
| B |              |    |                |    |         |   |   |   |   |   |   |   |             |    |    |
| A |              |    |                |    |         |   |   |   |   |   |   |   |             |    |    |

| PIN NUMBER | SIGNAL NAME    | COMMENTS                                                                       |
|------------|----------------|--------------------------------------------------------------------------------|
| P1-P2      | Positive Power | 54Vdc Power                                                                    |
| P3-P4      | Negative Power | 54Vdc Power return                                                             |
| A1         | PSON_L         | Low=54Vdc main output is ON, High=OFF                                          |
| A2         | Logic GND      | Logic GND                                                                      |
| A3         | SCL_0          | I2C Clock 0                                                                    |
| A4         | SDA_0          | I2C Data 0                                                                     |
| A5         | Logic GND      | Logic GND                                                                      |
| A6         | PS_KILL        | If High or Open both outputs are OFF.                                          |
| A7         | 12VSB return   | 12Vstby return                                                                 |
| A8         | 12VSB          | 12Vstby output                                                                 |
| B1         |                | Reserved                                                                       |
| B2         | PRESENT_L      | Connected to logic GND inside. Short pin informs system of PSU being inserted. |
| B3         |                | Reserved                                                                       |
| B4         | A0             | I2C Address                                                                    |
| B5         | A1             | I2C Address                                                                    |
| B6         | A1             | I2C Address                                                                    |
| B7         | 12VSB return   | 12Vstby return                                                                 |
| B8         | 12VSB          | 12Vstby output                                                                 |
| C1         | Current share  | 54Vdc main current share signal                                                |
| C2         | SMB_ALERT_L    | SMB Alert                                                                      |
| C3         |                | Reserved                                                                       |
| C4         | Logic GND      | 12vstby return                                                                 |
| C5         | PW_OK          | Both outputs are ON and within regulation                                      |
| C6         | IN_OK          | Input voltage OK signal output, active High                                    |
| C7         | 12VSB return   | 12Vstby return                                                                 |
| C8         | 12VSB          | 12Vstby output                                                                 |

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel Power Solutions:](#)

[TET3600-48-104RA](#)