


SMD POWER INDUCTORS

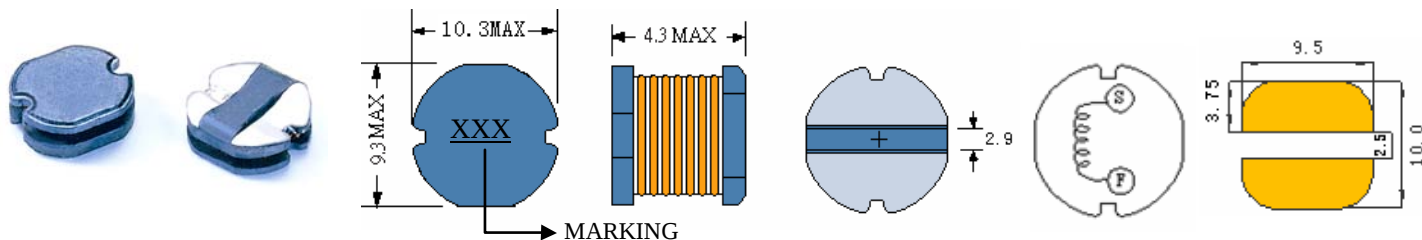



• Features

1. Open frame construction.

ELECTRICAL CHARACTERISTICS



Part Number	Inductance (μ H) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (A) (3)	Temperature Current (A) (4)
SC104-100	10	2.52MHZ	0.053	2.38	3.50
SC104-120	12	2.52MHZ	0.061	2.13	3.10
SC104-150	15	2.52MHZ	0.070	1.87	2.90
SC104-180	18	2.52MHZ	0.081	1.73	2.70
SC104-220	22	2.52MHZ	0.088	1.60	2.30
SC104-270	27	2.52MHZ	0.100	1.44	2.05
SC104-330	33	2.52MHZ	0.120	1.26	1.82
SC104-390	39	2.52MHZ	0.151	1.20	1.68
SC104-470	47	2.52MHZ	0.170	1.10	1.50
SC104-560	56	2.52MHZ	0.199	1.01	1.40
SC104-680	68	2.52MHZ	0.223	0.91	1.30
SC104-820	82	2.52MHZ	0.252	0.85	1.18
SC104-101	100	1KHZ	0.344	0.74	1.12
SC104-121	120	1KHZ	0.396	0.69	1.05
SC104-151	150	1KHZ	0.544	0.61	0.98
SC104-181	180	1KHZ	0.621	0.56	0.90
SC104-221	220	1KHZ	0.721	0.53	0.84
SC104-271	270	1KHZ	0.949	0.45	0.74
SC104-331	330	1KHZ	1.100	0.42	0.64
SC104-391	390	1KHZ	1.245	0.38	0.52
SC104-471	470	1KHZ	1.526	0.35	0.46
SC104-561	560	1KHZ	1.904	0.32	0.43

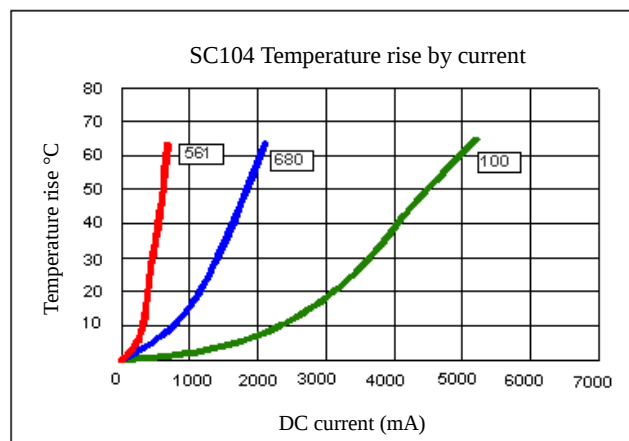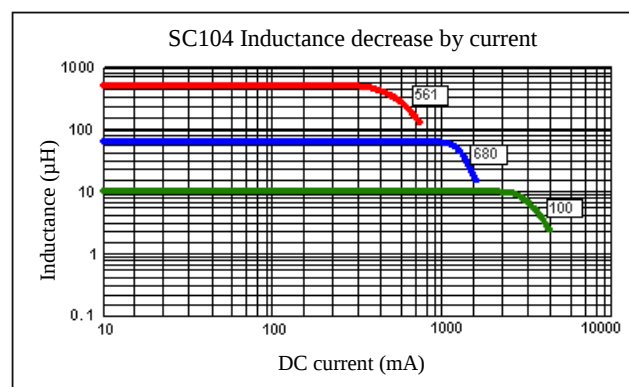

(1). Inductance tolerance $\pm 20\%$ tested at 0.25V, 0ADC and 25°C.

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 10% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[SC104-150](#) [SC104-120](#) [SC104-471](#) [SC104-181](#) [SC104-221](#) [SC104-680](#) [SC104-100](#) [SC104-271](#) [SC104-560](#)
[SC104-330](#) [SC104-151](#) [SC104-391](#) [SC104-220](#) [SC104-180](#) [SC104-270](#) [SC104-820](#) [SC104-121](#) [SC104-101](#)
[SC104-331](#) [SC104-390](#) [SC104-470](#) [SC104-561](#)