



HF 60 OZAF Series – 2920 Chip

RoHS Compliant

Product Features

- 2920 Dimension, Surface mountable, Solid state, Faster time to trip than standard
- Full compliance with EU Directive 2011/65/EU and amending directive 2015/863
- AEC-Q Compliant
- Meets Bel automotive qualification*
 - * Largely based on internal AEC-Q test plan

Operating (Hold Current) Range

50mA - 160mA

Maximum Voltage


240VAC/250VAC (per table)

Temperature Range

-40°C to 85°C

Agency Approval

TUV (Std. EN/IEC 60738-1/60738-1-1 and EN/IEC 60730-1, Cert. R50102117) UL Recognized Component (Std. UL1434, File E305051)



UK CE & Sus **AEC-Q Compliant**

LEAD FREE =



HALOGEN FREE = HF

Electrical Characteristics (23°C)

			Trip		Max. Oper. Voltage	Max. Int. Voltage	Typ.	Max Time to Trip		Resistance Tolerance			Agency Approvals	
	Part Number		Current					Current	Time	Rmin	Rmax	R1max	į	△ TÜV
		Ін, А	Іт, А	Imax, A	Vmax, Vac	VI-max, Vac	Pd, W	Α	Sec	Ohms	Ohms	Ohms	c 91 2 us	ΤÜV
A	0ZAF0005FF28	0.05	0.12	1.0	240	250	1.5	0.25	15.00	10.0	55.0	70.0	Υ	Υ
E	0ZAF0008FF28	0.08	0.19	1.2	240	250	1.5	0.40	15.00	6.0	16.0	25.0	Υ	Υ
(0ZAF0012FF28	0.12	0.30	1.2	240	250	1.5	0.60	15.00	6.0	14.0	20.0	Υ	Υ
	0ZAF0013FF28	0.13	0.32	1.2	240	250	1.5	0.65	15.00	2.0	6.0	12.0	Υ	Υ
E	0ZAF0016FF28	0.16	0.37	2.0	240	250	1.5	0.80	15.00	2.0	6.0	11.0	Υ	Υ

Hold Current- The maximum current at which the device will not trip in still air at 23°C.

Trip current- The minimum current at which the device will trip in still air at 23°C. Vmax Maximum voltage device can withstand at its rated current without suffering damage. Imax Maximum fault current device can withstand at rated voltage (Vmax) without damage.

Typical power dissipated-type amount of power dissipated by device when in tripped state in 23°C still air environment.

Rmin Minimum device resistance at 23°C prior to tripping.

Rmax Maximum device resistance at 23°C.

R1max Maximum device resistance at 23℃ measured 1 hour after tripping or reflow soldering of 260℃ for 20 seconds.



Specifications subject to change without notice

PTC's – Basic Theory of Operation / "Tripped" Resistance Explanation

A Bel PTC consists of a block of polymeric material containing conductive carbon granules which is sandwiched between two conductive metal plates. When this polymer block reaches approximately 125C, either due to current passing through it via conductive chains of carbon particles or due to an external heat source; it swells volumetrically. This expansion breaks apart a majority of the chains of carbon granules that run randomly between the two conductive plates. This behavior results in a sharp increase in resistance across the two plates which all but eliminates current flow through the device, allowing just enough residual current flow to maintain the block's internal temperature at 125C. Once this "tripped" state current is cut off, the polymer brick cools and shrinks to its original size, thereby allowing its broken carbon chains to reestablish themselves and permit the part to return to its low resistance state. Once cooled to room ambient, the PTC will once again exhibit a resistance less than its "R1max" rating.

At currents below the device IHOLD rating, AND at temperatures below 100C, the PTC maintains a resistance value below its R1 MAX rating.

The catalog data for each device specifies a "Typical Power" value. This is the power required to exactly match the heat lost by the tripped device to its ambient surroundings at 23C. By Ohm's Law, power can be stated as: $W = E^2/R$. Thus the approximate resistance of a "Tripped" PTC can be determined by: $R = E^2/W$, where "E" is the voltage appearing across the PTC (usually the supply's open circuit voltage), and "W" is the Typical Power value for the particular PTC.

Since the PPTC acts to maintain a constant internal temperature, its apparent resistance will change based upon applied voltage and, to a lesser degree, ambient conditions. Consider the following example....


A PTC with a Typical Power of 1 watt protecting a circuit using a 60V supply will demonstrate an apparent, tripped resistance "R" of:

 $R = 60^2/1 = 3,600 \text{ ohms}$

This same tripped device when used to protect a 12V circuit would now present an apparent resistance of: $R = 12^2/1 = 144$ ohms

The value for Typical Power is "typical" because any physical factors that affect heat loss (such as ambient temperature or air convection) will somewhat alter the level of power that the PTC needs to maintain its internal temperature. In short, PTCs do not exhibit a constant, quantifiable tripped resistance value.

Average Time Current Characteristic Curve at 23°C

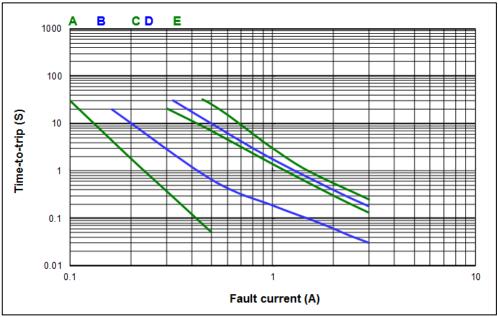

The Average Time Current Characteristic Curve and Temperature Rerating Curve are affected by a number of variables and these curves are provided for guidance only.



Specifications subject to change without notice


Bel Fuse Inc. 206 Van Vorst Street Jersey City, NJ 07302 USA

Rev. 0ZAF May2023

Type 0ZAF Series

Pad Layout

The dimensions in the table below provide the Recommended pad layout.




	Р		S	W			
Nor	ninal	Nor	minal	Nominal			
mm	mm Inch		mm Inch		Inch		
5.10	0.201	2.30	0.091	5.60	0.221		

Termination Pad Materials

Pure Tin

Mechanical Dimensions and Marking




All dimensions in mm.

	Dimer	sions	Marking Code			
Part Number	C	;	"b", Ін code			
	Min	Max	PXXXX			
0ZAF0005FF28	2.00	2.60	0005 240			
0ZAF0008FF28	2.00	2.60	0008 240			
0ZAF0012FF28	2.00	2.60	0012 240			
0ZAF0013FF28	2.00	2.60	0013 240			
0ZAF0016FF28	2.00	2.60	0016 240			

Temperature Derating Table

	Temperature Derating Table									
I Hold Value	-40	-20	0	23	30	40	50	60	70	85
0ZAF	158%	140%	120%	100%	93%	82%	72%	63%	54%	40%

Thermal Derating Curve



Cautionary Notes

- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/overtemperature fault conditions and may not be suitable for use in applications where repeated and/or prolonged fault conditions are anticipated.
- 3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
- 4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.
- If potting is mandated, avoid rigid potting compounds as they will encase the PTC and prevent it from volumetrically expanding to properly respond to a trip event.
- 6. MSL: 2a (According to IPC J-Std-020).



Specifications subject to change without notice

Bel Fuse Inc. 206 Van Vorst Street Jersey City, NJ 07302 USA

+1 201.432.0463 Bel.US.CS@belf.com belfuse.com/circuit-protection


Type 0ZAF Series

Environmental Specifications

Temperature cycling	JESD22 Method JA-104
Biased humidity	MIL-STD-202 Method 103
Operational life	MIL-STD-202 Method 108
Resistance to solvents	MIL-STD-202 Method 215
Mechanical shock	MIL-STD-202 Method 213
Vibration	MIL-STD-202 Method 204
Resistance to soldering heat	MIL-STD-202 Method 210
Thermal shock	MIL-STD-202 Method 107
Solderability	ANSI/J-STD-002
Board flex(SMD)	AEC-Q200-005
Terminal strength	AEC-Q200-006

Solder Reflow and Rework Recommendations

Profile Feature	Pb-Free Assembly			
Average Ramp-Up Rate (Tsmax to Tp)	3°C/second max			
Preheat :				
Temperature Min (Tsmin)	150°C			
Temperature Max (Tsmax)	200°C			
Time (tsmin to tsmax)	60-180 seconds			
Time maintained above:				
Temperature(TL)	217°C			
Time (tL)	60-150 seconds			
Peak/Classification Temperature(Tp):	260°C			
Time within 5°C of actual Peak:				
Temperature (tp)	20-40 seconds			
Ramp-Down Rate :	6°C/second max.			
Time 25°C to Peak Temperature :	8 minutes max			



Solder Reflow

Due to "lead free / RoHS compliant" construction of these PTC devices, the required Temperature and Dwell Time in the "Soldering" zone of the reflow profile are greater than those used for non-RoHS devices.

- 1. Recommended reflow methods; IR, vapor phase oven, hot air oven.
- 2. Not Recommended For Wave Solder / Direct Immersion.
- 3. Recommended paste thickness range 0.20 0.25mm.
- 4. Devices are compatible with standard industry cleaning solvents and methods.
- 5. MSL: 2a (According to IPC J-Std-020).

Caution


If reflow temperature / dwell times exceed the recommended profile, the electrical performance of the PTC may be affected. Rework: MIL-STD-202G Method 210F, Test Condition A.

Standard Packaging

Part Number	Tape/Reel Qty			
0ZAF0005FF28				
Thru	800			
0ZAF0016FF28				

800 fuses in 7 inches dia. Reel, 8mm wide tape, 4mm pitch, per EIA-481(equivalent IEC-286 part 3).

P/N Explanation and Ordering Information

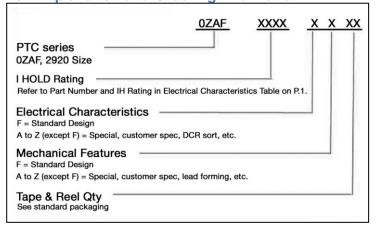

Specifications subject to change without notice



Bel Fuse Inc. 206 Van Vorst Street Jersey City, NJ 07302 USA

+1 201.432.0463 Bel.US.CS@belf.com belfuse.com/circuit-protection

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

0ZAF0005FF28 0ZAF0008FF28 0ZAF0012FF28 0ZAF0013FF28 0ZAF0016FF28