

Phase Shifters

Line Stretcher Type

30, 60, & 90° per GHz Phase Shift

- DC - 18 GHz Frequency Range
- Low Insertion Loss
- 50 Watts average power
- Rugged Construction

This series of broad band Line Stretcher type Phase Shifters were designed to provide phase slope adjustment in a fixed system of microwave components. They utilize precision internal airline design techniques in small, lightweight, ruggedly constructed units that consistently perform phase slope adjustment functions through the use of a smooth, continuous, trombone type mechanism that allows precise field adjustment and firm locking arrangement.



SPECIFICATIONS

Frequency Range: DC - 18.0 GHz

Impedance: 50 Ohms


VSWR: see chart

Insertion Loss: see chart



Power: 50 Watts average, 1kW Peak

Operating Temperature: -55 °C - +125 °C

Connectors: Passivated Stainless Steel SMA Female*

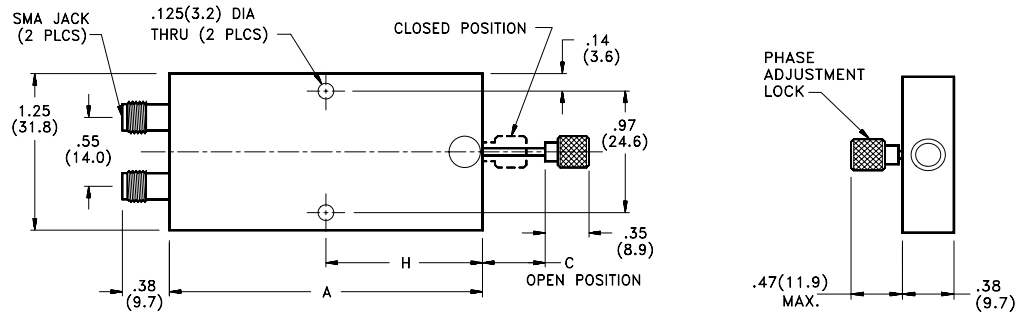

Typical Performance

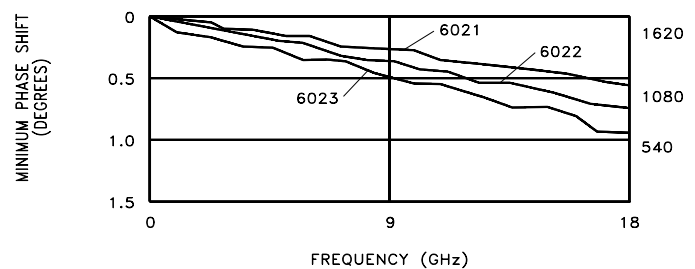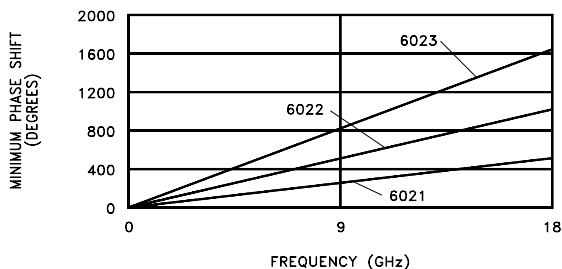

Frequency (GHz)	Model Number	Phase Shift (deg/GHz)	VSWR	Insertion Loss	Dimensions - in (mm)			Weight	
					A	C	H	oz	gm
DC - 18.0	PHS-6021-FF-SMA-79	30	1.3, dc-10 GHz 1.5, 10-18 GHz	0.3 + .025 f	2.50 (63.5)	0.50 (12.7)	1.25 (31.8)	2.5	71.4
DC - 18.0	PHS-6022-FF-SMA-79	60	1.4, dc-10 GHz 1.6, 10-18 GHz	0.3 + .035 f	3.50 (88.9)	1.00 (25.4)	1.75 (44.5)	3.5	100.0
DC - 18.0	PHS-6023-FF-SMA-79	90	1.5, dc-10 GHz 1.7, 10-18 GHz	0.3 + .045 f	4.50 (114.3)	1.50 (38.1)	2.25 (57.2)	4.5	128.6

Note: SMA male, TNC, or Type N output connectors, either male or female, are also available by substituting TNC or NNN for SMA in the Model Number.

If an interface gender change is desired, substitute MM or MF for FF in the Model Number. Please note that the housing thickness will increase accordingly when larger connectors are selected.


[Customer Login](#) United States

 Try our New Search!

[< Return to Product Categories](#)

SKU	Product	Frequency	Power	Body	Interface	Gender	dB
Line Stretcher Phase Shifters - RoHS Compliant							
PHS-6023-FF-SMR-79	Phase Shifter	18	50	STD	SMA	F/F	More Details

All rights reserved. ©2002 Midwest Microwave

We also have

Attenuator

BUY NOW Our Price: **\$222.00**



ATT-0640-06-29M-02
6 dB DC-40 Ghz Attenuator
Subminiature Minipad
2.9mm/2.9mm 1 watt
Passivated

[Click for More Info](#)

Attenuator

BUY NOW Our Price: **\$94.70**



ATT-205M-70-SMA-02
0.5 dB DC-12.4 Ghz
Attenuator Miniature
SMA/SMA 2 watt Passivated

[Click for More Info](#)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[PHS-6023-FF-SMA-79](#) [PHS-6022-FF-SMA-79](#)