

## *N Male Plug to N Female Jack - Flange Mount*

### Model Number

**ADT-2694-MF-NNN-02**

### SPECIFICATIONS

**Frequency:** DC - 18.0 GHz


**VSWR:** 1.05 @ DC - 4.0 GHz

1.06 @ 4.0 - 8.0 GHz

1.10 @ 8.0 - 18.0 GHz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

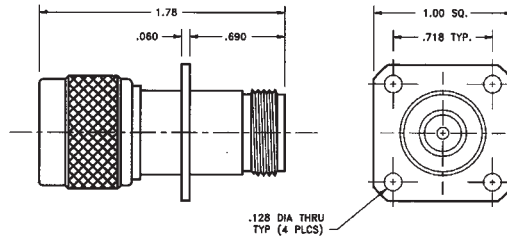

## *Flange Mount 7mm to 7mm*

### Model Number

**ADT-2667-00-7MM-02**


### SPECIFICATIONS

**Frequency:** DC - 18.0 GHz

**VSWR:** 1.025 + .0025 f (GHz)

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

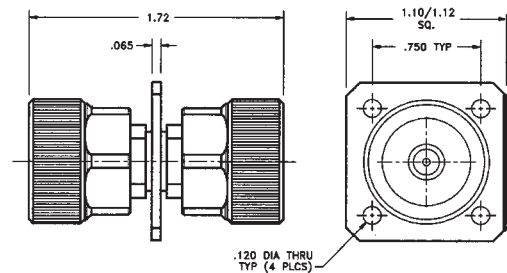

## *TNC Female Jack to SMA Female Jack - Rear Mount Bulkhead*

### Model Number

**ADT-2837-TF-SMF-02**

### SPECIFICATIONS

**Frequency:** DC - 18.0 GHz


**VSWR:** 1.10 @ DC - 4.0 GHz

1.15 @ 4.0 - 8.0 GHz

1.25 @ 8.0 - 18.0 GHz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

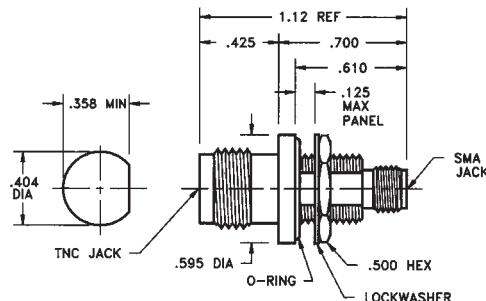

## *BNC Female Jack to SMA Female Jack- Rear Mount Bulkhead*

### Model Number

**ADT-2838-BF-SMF-02**


### SPECIFICATIONS

**Frequency:** DC - 4.0 GHz

**VSWR:** 1.15 @ DC - 4.0 GHz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

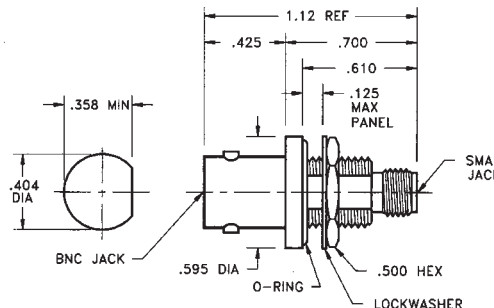

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Cinch Connectivity Solutions:](#)

[ADT-2837-TF-SMF-02](#)