

Thermal-Magnetic Circuit Breaker 2210-T2..

Description

One, two and three pole thermal-magnetic circuit breakers with trip-free mechanism and toggle actuation (S-type TM CBE to EN 60934/IEC 934). Featuring a combi-foot design for both symmetric and asymmetric rail mounting. Available with auxiliary contact (1 x N/O or 1 x N/C) for status signalling. Two and three pole models are internally linked to ensure that both/all poles trip in the event of an overload on one pole, even if the actuator is held in the ON position. This CBE can be supplied in current ratings up to 32 A with a choice of characteristic curves. All screw terminals are recessed for safety. Approved to CBE standard EN 60934 (IEC 60934).

Typical applications

Process control equipment, robotics, machine tool control, communications systems, instrumentation.

Features

- Comprehensive approvals allow global use
- Current rating range from 0.1 A to 32 A
- Very small width of only 12.5 mm including auxiliary contacts
- High vibration resistance to DNV GL Class B for mounting with combustion engines, pumps, compressors
- Compliant with the relevant requirements of the railway standards DIN EN 50155, DIN EN 61373 and EN 45545 (detailed information upon request)

Your benefits

- Space and weight savings of at least 50 % compared to conventional MCBs
- Reduced assembly times thanks to integral auxiliary contacts
- Optimum equipment protection through fine grading of current ratings

Preferred types – for more details on all configurations please see order numbering code

Preferred types are E-T-A products most frequently used by E-T-A customers. We manufacture E-T-A preferred types in particularly

high volumes. Our preferred types are supplied at shorter lead times than non-standard versions.

Preferred types	Standard current ratings (A)										
1-pole	0.5	1	2	3	4	5	6	8	10	16	20
2210-T210-K0M1-H121-	x	x	x	x	x	x	x	x	x	x	x
2-pole	0.5	1	2	3	4	5	6	8	10	16	20
2210-T220-K0M1-H221-			x		x		x		x	x	x

Approvals



Data sheet

For access to the latest documents please follow: www.e-t-a.de/en053

Compliances



2210-T2..
2-pole

Technical data

For further details please see: www.e-t-a.de/ti_e

Voltage rating	AC 250 V; 3 AC 433 V (50/60 Hz); DC 65 V	
	(UL: AC 277/480 V; DC 65 V)	
Current rating range	0.1...32 A for curves M1, T1 0.1...16 A for curves F1, F2	
Auxiliary circuit	1 A, AC 240 V / DC 65 V, resistive (min. 10 V / 10 mA)	
Typical life	3 AC 433 V; AC 250 V: 0.1...25 A 10,000 operations at 1 x I _N , inductive DC 65 V: 0.1...32 A 10,000 operations at 1 x I _N , inductive 3 AC 433 V; AC 250 V: 32 A 6,000 operations at 1 x I _N , resistive	
Ambient temperature	-30...+60 °C (-22...+140 °F) T 60	
Insulation co-ordination (IEC 60664 and 60664 A)	rated impulse withstand voltage 2.5 kV	pollution degree 2 reinforced insulation in operating area
Dielectric strength (IEC 60664 and 60664A)	test voltage operating area AC 3,000 V main/aux. circuit AC 3,000 V pole/pole AC 1,500 V	
Insulation resistance	> 100 MΩ (DC 500 V)	
Interrupting capacity I _{cn}	0.1...5 A 400 A 6...32 A 800 A curves F1, F2, M1, T1: 0.1...16 A 2,500 A	(at DC 32 V)
Interrupting capacity (UL 1077)		
I _N	0.1...16 A	20...32 A
AC 277 V 1-pole	5,000 A	2,000 A
AC 277/480 V 2-/3-pole	5,000 A	2,000 A
DC 65 V	2,000 A	2,000 A
Degree of protection (IEC 60529/DIN 40050)	operating area IP30 terminal area IP20	
Vibration	curves F1, F2: 3 g (57-500 Hz), ± 0.23 mm (10-57 Hz) curves M1, T1: 5 g (57-500 Hz), ± 0.38 mm (10-57 Hz) to IEC 60068-2-6, test Fc 10 frequency cycles/axis	
Shock	curves F1, F2: 25 g (11 ms), directions 1, 2, 3, 4, 5 10 g (11 ms), direction 6 curves M1, T1: 25 g (11 ms), directions 1, 2, 3, 4, 5 20 g (11 ms), direction 6 to IEC 60068-2-27, test Ea	
Corrosion	96 hours at 5 % salt mist to IEC 60068-2-11, test Ka	
Humidity	240 hours at 95 % RH to IEC 60068-2-78, test Cab	
Mass	approx. 60 g per pole	

Standard current ratings and typical internal resistance values

Current rating (A)	Internal resistance (Ω)			
	F1	F2	M1	T1
	fast acting for DC only	fast acting delay for AC + DC	standard for AC+DC	delayed low resistance for AC only
0.1	162	162	92	81
0.2	39.3	39.3	26.1	24.2
0.3	17.5	17.5	11.6	10.4
0.4	9.2	9.2	6.6	6.0
0.5	6.8	6.8	4.1	3.9
0.6	4.2	4.2	3	2.7
0.8	2.8	2.8	1.65	1.53
1	1.6	1.6	1.10	0.98
1.5	0.78	0.78	0.47	0.42
2	0.42	0.42	0.28	0.24
2.5	0.26	0.26	0.183	0.17
3	0.18	0.18	0.124	0.12
4	0.12	0.12	0.077	0.073
5	0.092	0.092	0.063	0.055
6	0.054	0.054	0.045	0.039
8	0.025	0.025	≤ 0.02	≤ 0.02
10	0.022	0.02	≤ 0.02	≤ 0.02
12	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
16	≤ 0.02	≤ 0.02	≤ 0.02	≤ 0.02
20	-	-	≤ 0.02	≤ 0.02
25	-	-	≤ 0.02	≤ 0.02
32	-	-	≤ 0.02	≤ 0.02

Approvals

Authority	Standard	Rated voltage	Current ratings
VDE	IEC EN 60934	3 AC 433 V AC 250 V DC 65 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
UL	UL 1077	AC 277/480 V AC 277 V DC 65 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
CSA	C22.2 No 235	AC 277/480 V AC 277 V DC 65 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
CQC	GB/T 17701	AC 250/433 V AC 250 V DC 65 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
DVN	DNV rules for classification	3 AC 433 V AC 250 V DC 65 V	0.1 A...32 A 0.1 A...32 A 0.1 A...32 A
KTL	KC60934	AC 250 V, 1-pole AC 433 V, 2-pole	0.1 A...16 A 0.1 A...16 A

Preferred types

Preferred types are E-T-A products most frequently used by E-T-A customers. We manufacture E-T-A preferred types in particularly

high volumes. Our preferred types are supplied at shorter lead times than non-standard versions.

Preferred types	Standard current ratings (A)										
1-pole	0.5	1	2	3	4	5	6	8	10	16	20
2210-T210-K0M1-H121-	x	x	x	x	x	x	x	x	x	x	x
2-pole	0.5	1	2	3	4	5	6	8	10	16	20
2210-T220-K0M1-H221-			x		x		x		x	x	x

Ordering information

Type No.

2210 single and multipole thermal-magnetic circuit breaker

Mounting

T rail mounting

Actuator design

2 toggle

Number of poles

1 single pole protected

2 2-pole protected

3 3-pole protected

Accessories

0 without accessories

Terminal design (main contacts)

K0 screw terminals

Characteristic curve

F1 fast acting: therm. $1.01-1.4 \times I_N$;

magn. $2-4 \times I_N$ DC (DC only)

F2 fast acting: therm. $1.01-1.4 \times I_N$;

magn. $3,5-6,5 \times I_N$ AC/4,5-8,5 $\times I_N$ DC

M1 standard delay: therm. $1.01-1.4 \times I_N$;

magn. $6-12 \times I_N$ AC, $7,8-15,6 \times I_N$ DC

T1 delayed: therm. $1.01-1.4 \times I_N$; magn. $10-20 \times I_N$ AC

Auxiliary contact design

H without intermediate position

Auxiliary contacts

1 with auxiliary contacts

2 auxiliary contacts on pole 1 only
(multipole devices)

Auxiliary contact function (see diagrams)

2 1 N/O contact

3 1 N/C contact

Auxiliary contact - terminal design

1 screw terminals

Current ratings

0.1...32 A

2210 - T 21 0 - K0 M1- H 1 2 1 - 10 A ordering example


Please be informed that we have minimum ordering quantities to be observed.

Custom designed versions


Looking for a version you cannot find in our ordering number code? Please get in touch. We will be pleased to find a solution for you.

Remote release as an additional pole on request.

Dimensions

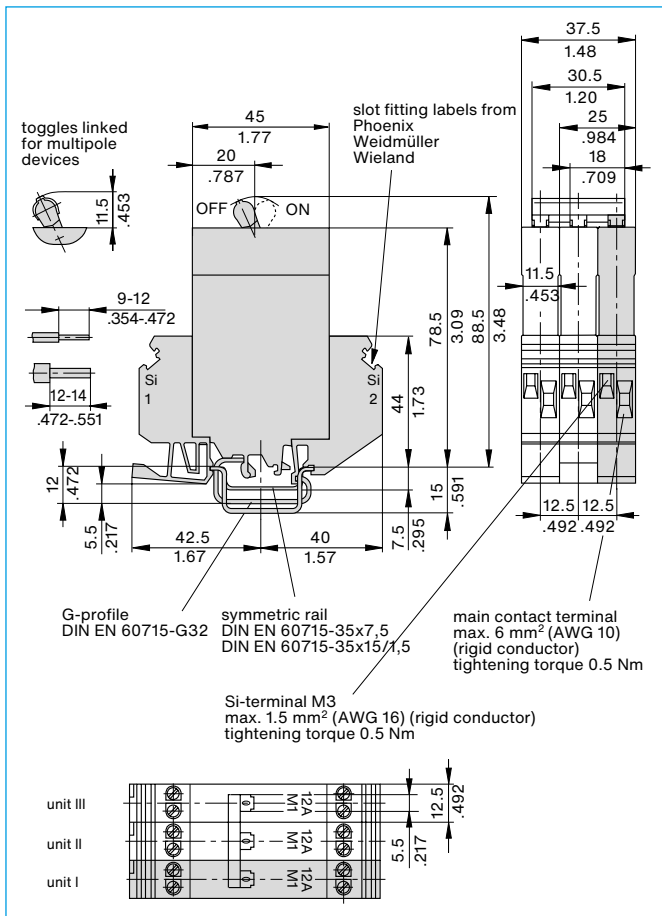


Installation drawing

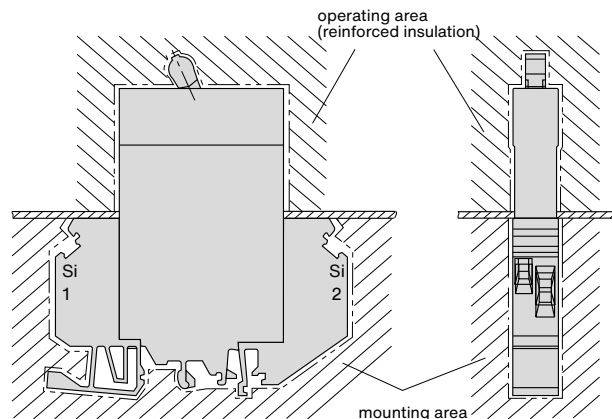


Internal connection diagrams

...-H131-...

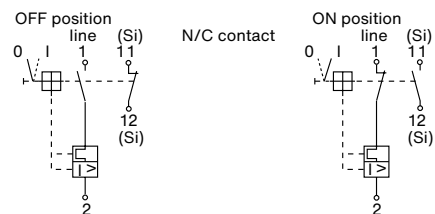


...-H121-...

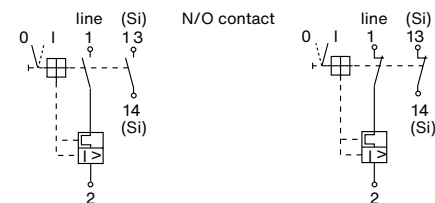

Cable cross section




Conductor	Main contacts 1 & 2	Aux. contact IN
rigid	min. 0.2 mm ² max. 6 mm ²	0.2 mm ² 1.5 mm ²
flexible	min. 0.2 mm ² max. 4 mm ²	0.2 mm ² 1.0 mm ²
flexible with wire end ferrule without plastic sleeve	min. 0.25 mm ² max. 4 mm ²	0.25 mm ² 1.0 mm ²
flexible with wire end ferrule with plastic sleeve	min. 0.25 mm ² max. 2.5 mm ²	0.25 mm ² 0.75 mm ²

Shock directions

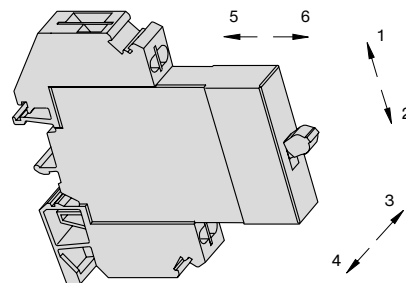


This is a metric design and millimeter dimensions take precedence (mm)
inch

Typical time/current characteristics

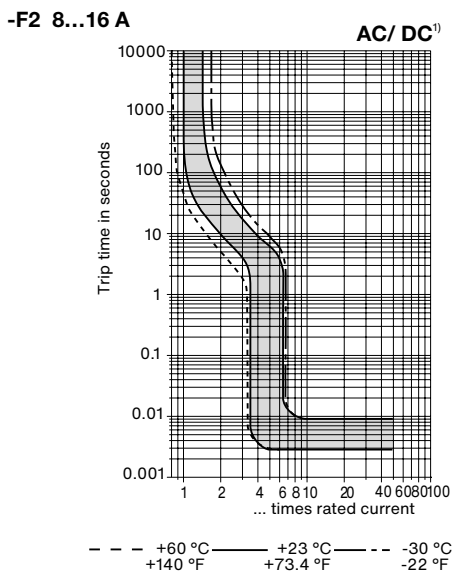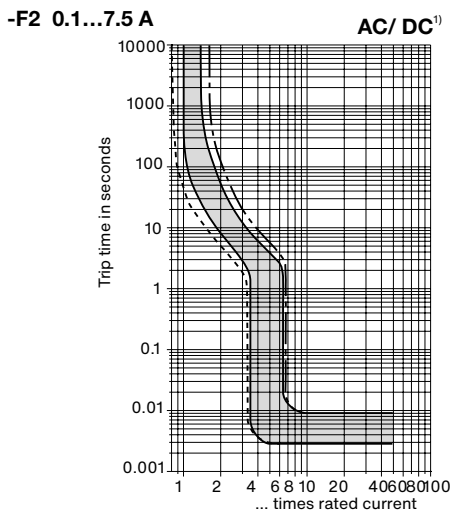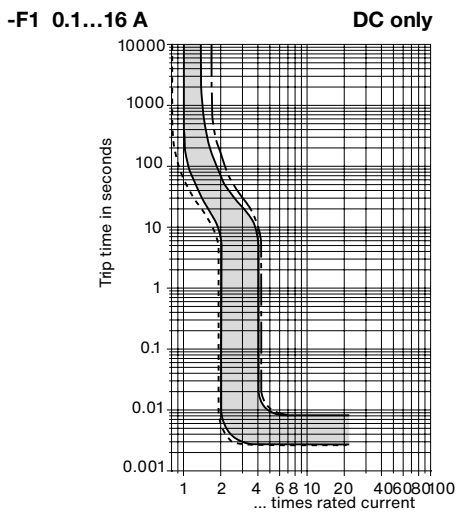

¹⁾ Magnetic tripping currents are increased by 30% on DC supplies.

Typical time/current characteristics

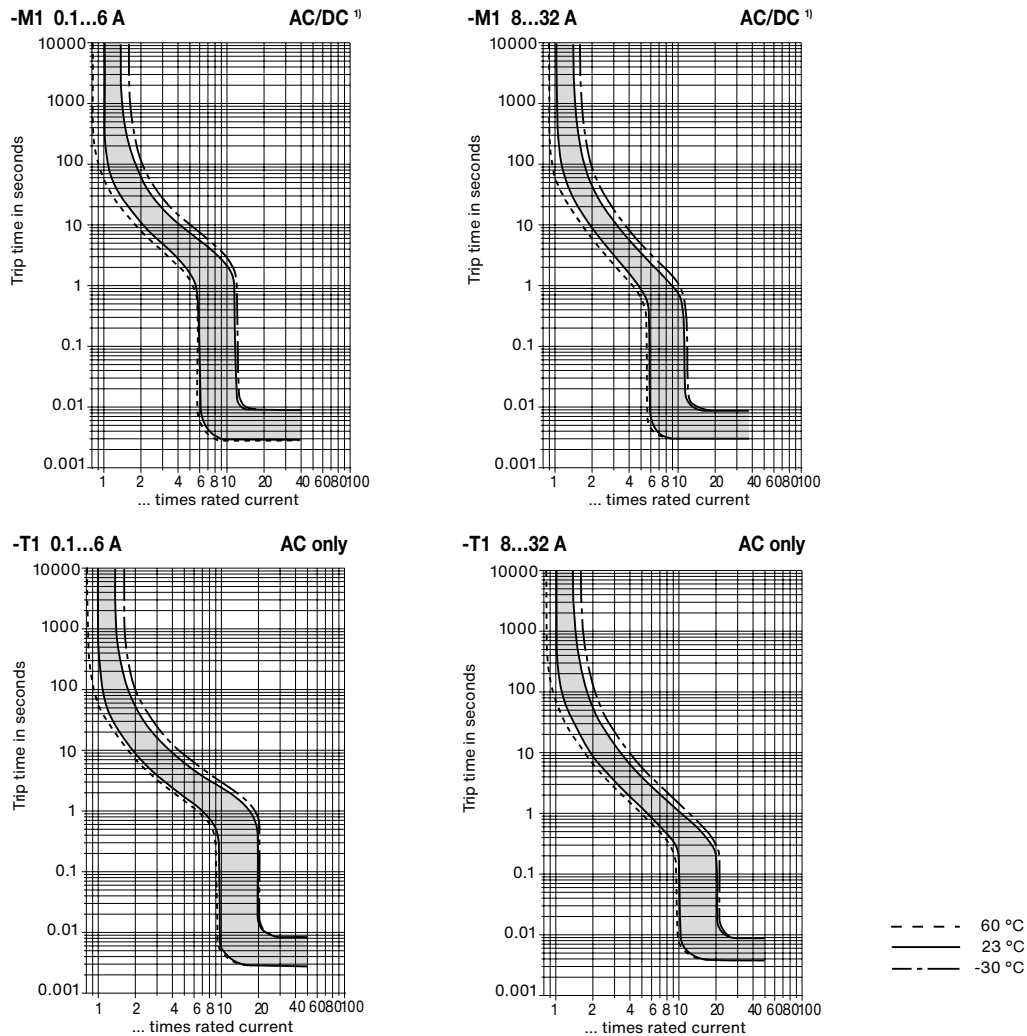

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Ambient °F	-22	-4	+14	+32	+73.4	+86	+104	+122	+140
temp. °C	-30	-20	-10	0	+23	+30	+40	+50	+60
Derating factor	0.76	0.79	0.83	0.88	1	1.04	1.11	1.19	1.29


Multi pole devices: all poles symmetrically loaded. With single pole overload, thermal tripping will be at max. $1.7 \times I_N$ with curves F1, F2 and M1.

¹⁾ Magnetic tripping currents are increased by 30 % on DC supplies (curves F2, M1).

Accessories


Connector bus links -K10

X210 589 01/ 2.5 mm², (AWG 14) (black) up to 20 A max. load
X210 589 02/ 1.5 mm², (AWG 16) (brown) up to 13 A max. load




Busbar 1-pole, 90° X 222 540 11

The one metre long busbars can be cut to suitable lengths. Plug-on caps can be fitted on the ends to provide brush contact protection. cross section: 16 mm²

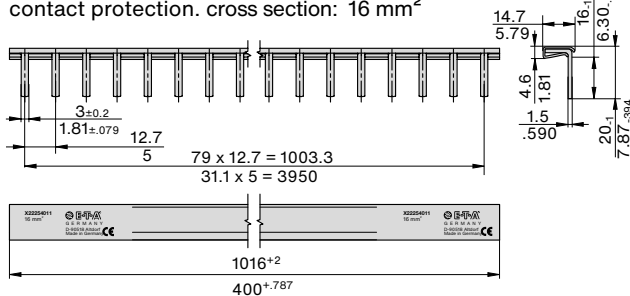

Busbar 1-pole Y 308 498 01


cross section: 16 mm²

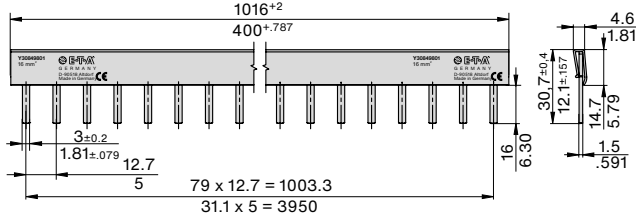

Busbar for 1-pole devices

Firmly mounted supply terminals, placed at fixed distances (1 supply terminal every 7 modules)
 For cable feed from the side
 Ideal for applications with high vibration requirements

Y31270901 cross section: 16 mm²

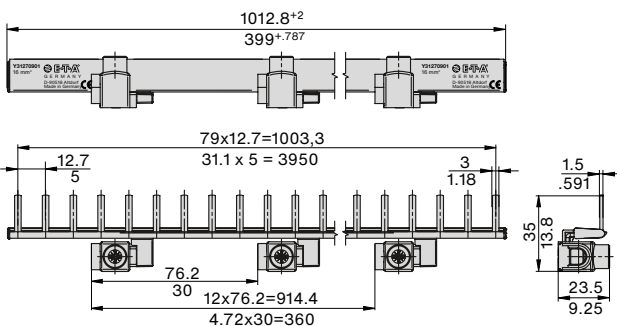


Plug-on cap, 1-pole

Y 307 851 01




Busbar 2-pole

Y 308 499 01 cross section: 16 mm²

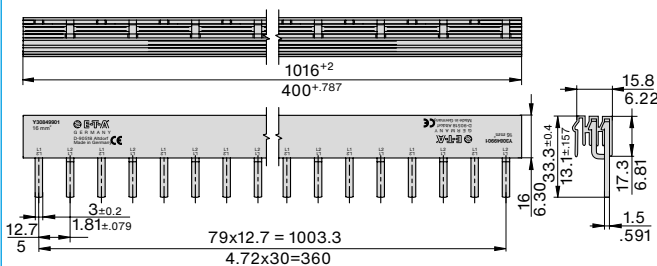

Plug-on cap, busbar 2/3-pole


Y 308 506 01



Busbar 3-pole


Y 308 500 01

cross section: 16 mm²

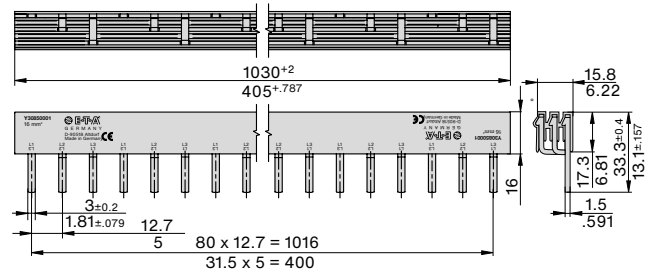

Plug-on cap, busbar 2/3-pole

Y 308 506 01





Supply terminal

Y 308 503 01

I_{max} 63 A with 1-pole busbar,
50 A with multipole busbar

Max. tightening torque of terminal screw 2 Nm
 Max. cable cross section: 25 mm² / single strand
 16 mm² / multistrand
 with wire end ferrule

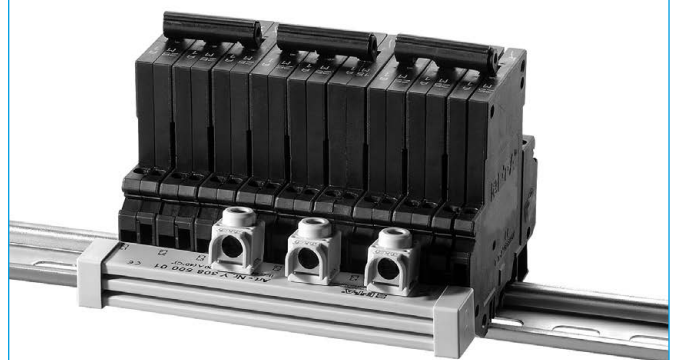

Caution:

When using multipole busbars please leave at least one pole's width between two adjacent line entry terminals.

This is a metric design and millimeter dimensions take precedence (mm / inch)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

E-T-A Circuit Breakers:

[2210-T230-K0T1-H231-8A](#) [2210-T220-K0F2-H231-1A](#) [2210-T210-K0T1-H131-2A](#) [2210-T210-K0F2-H131-3A](#) [2210-T230-K0T1-H231-0.1A](#) [2210-T230-K0F2-H231-12A](#) [2210-T230-K0M1-H231-1.5A](#) [2210-T220-K0T1-H231-25A](#) [2210-T230-K0T1-H231-0.3A](#) [2210-T210-K0T1-H131-12A](#) [2210-T230-K0T1-H231-6A](#) [2210-T220-K0T1-H231-32A](#) [2210-T210-K0F2-H131-2.5A](#) [2210-T230-K0T1-H231-1.5A](#) [2210-T230-K0T1-H231-3A](#) [2210-T230-K0M1-H231-2A](#) [2210-T210-K0F2-H131-4A](#) [2210-T220-K0F2-H231-8A](#) [2210-T220-K0M1-H231-3A](#) [2210-T220-K0M1-H231-0.4A](#) [2210-T210-K0T1-H131-0.5A](#) [2210-T210-K0M1-H131-3A](#) [2210-T210-K0T1-H131-5A](#) [2210-T230-K0M1-H231-6A](#) [2210-T220-K0T1-H231-6A](#) [2210-T230-K0M1-H231-0.4A](#) [2210-T210-K0T1-H131-8A](#) [2210-T210-K0T1-H131-1A](#) [2210-T220-K0F2-H231-10A](#) [2210-T230-K0F2-H231-0.4A](#) [2210-T210-K0M1-H131-1.5A](#) [2210-T230-K0M1-H231-1.0A](#) [2210-T220-K0F2-H231-15A](#) [2210-T230-K0M1-H231-16A](#) [2210-T230-K0M1-H231-0.3A](#) [2210-T210-K0F2-H131-5A](#) [2210-T230-K0T1-H231-16A](#) [2210-T220-K0M1-H231-0.5A](#) [2210-T230-K0M1-H231-20A](#) [2210-T220-K0M1-H231-10A](#) [2210-T220-K0T1-H231-15A](#) [2210-T210-K0F2-H131-10A](#) [2210-T230-K0M1-H231-2.5A](#) [2210-T210-K0M1-H131-25A](#) [2210-T210-K0M1-H131-4A](#) [2210-T230-K0M1-H231-8A](#) [2210-T220-K0T1-H231-0.3A](#) [2210-T230-K0F2-H231-5A](#) [2210-T210-K0M1-H131-15A](#) [2210-T220-K0T1-H231-3A](#) [2210-T230-K0M1-H231-15A](#) [2210-T220-K0T1-H231-1A](#) [2210-T210-K0M1-H131-2A](#) [2210-T210-K0F2-H131-8A](#) [2210-T220-K0F2-H231-4A](#) [2210-T210-K0T1-H131-6A](#) [2210-T210-K0M1-H131-0.1A](#) [2210-T220-K0F2-H231-5A](#) [2210-T220-K0F2-H231-0.1A](#) [2210-T230-K0F2-H231-10A](#) [2210-T230-K0F2-H231-2A](#) [2210-T210-K0T1-H131-1.5A](#) [2210-T210-K0M1-H131-8A](#) [2210-T220-K0F2-H231-2A](#) [2210-T230-K0T1-H231-25A](#) [2210-T230-K0F2-H231-0.5A](#) [2210-T220-K0F2-H231-1.5A](#) [2210-T210-K0T1-H131-20A](#) [2210-T230-K0T1-H231-1A](#) [2210-T220-K0M1-H231-2A](#) [2210-T220-K0F2-H231-12A](#) [2210-T220-K0T1-H231-2A](#) [2210-T210-K0M1-H131-20A](#) [2210-T230-K0M1-H231-0.1A](#) [2210-T210-K0F2-H131-16A](#) [2210-T220-K0M1-H231-4A](#) [2210-T230-K0T1-H231-4A](#) [2210-T220-K0F2-H231-6A](#) [2210-T210-K0F2-H131-0.2A](#) [2210-T210-K0M1-H131-0.3A](#) [2210-T210-K0M1-H131-2.5A](#) [2210-T210-K0M1-H131-5A](#) [2210-T220-K0T1-H231-0.4A](#) [2210-T220-K0T1-H231-12A](#) [2210-T220-K0M1-H231-15A](#) [2210-T220-K0M1-H231-8A](#) [2210-T210-K0T1-H131-0.2A](#) [2210-T230-K0T1-H231-0.2A](#) [2210-T220-K0F2-H231-0.2A](#) [2210-T220-K0T1-H231-5A](#) [2210-T220-K0M1-H231-0.1A](#) [2210-T210-K0F2-H131-2A](#) [2210-T210-K0M1-H131-0.2A](#) [2210-T230-K0F2-H231-0.3A](#) [2210-T220-K0M1-H231-6A](#) [2210-T230-K0T1-H231-12A](#) [2210-T230-K0T1-H231-5A](#) [2210-T220-K0F2-H231-0.4A](#) [2210-T220-K0M1-H231-0.3A](#) [2210-T230-K0T1-H231-0.5A](#)