

# LM WRAS Approved Series



This is suitable for use in water, industrial wastewater and sewage, that can have wide variations of temperature. This small design of switch is for use in more confined spaces, where there is not enough room for the larger FFSMC type.

The rounded body design and floating attitude prevents accumulation of solids on the body. The switch has additional internal ballast, to bring the centre of gravity and rotation close to the cable entry point.


The switching element is a self cleaning type, that makes the complete switch insensitive to humidity and condensation, allowing this type to operate in widely fluctuating temperatures. The switch contacts are rated at 10 Amp resistive.

Supplied, as standard, with 5 metres cable and adjustable counterweight.



Technical Specifications		LM10AW	LM10BW	LM10CW
Contact Form		N/O	N/C	C/O
Material		High Density Polyethylene		
Temp Range	°C	0 / +55 (WRAS approved up to +23°C)		
	°F	+ 32 / +131		
Cable (standard length 5m)		With protective earth		no earth
Standard cable covering		WRC Approved		
Max. working pressure		10 bar		
Electrical Specifications				
Power Rating	Max	AC : 750 VA DC : 180W		
Switching Voltage	Max	AC : 250 V DC : 110 V		
Switching Current Max. Resistive		10 A		
Switching Current Max. Inductive		AC : 4A DC : 1 A		

It is necessary to use an auxiliary relay, when switching pump motors or any loads that are not purely resistive.

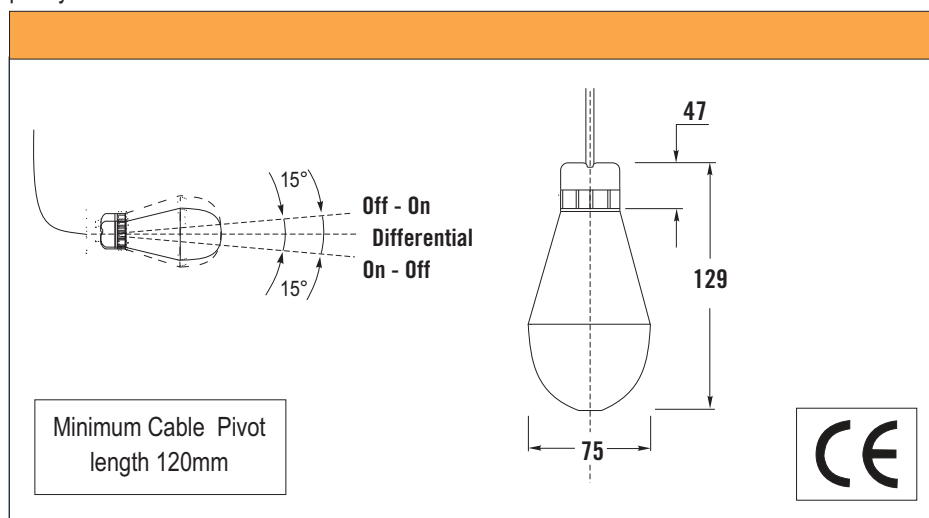

- For smaller tanks and restricted space
- Use in sewer and industrial waste water
- Shape avoids "ragging", in sewer systems
- Unaffected by suspended solids
- Operates in Turbulent Fluids

Cynergy3 Components Ltd  
7 Cobham Road  
Ferndown Industrial Estate  
Wimborne  
Dorset BH21 7PE  
Tel: +44 (0) 1202 897969  
sales@cynergy3.com

ISO 9001 CERTIFIED


© 2014 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

www.cynergy3.com


# LM WRAS Approved Series





## Part Numbering System

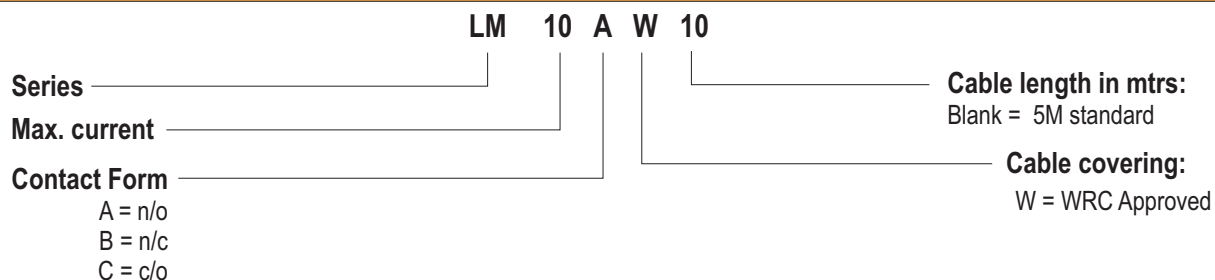


## Installation

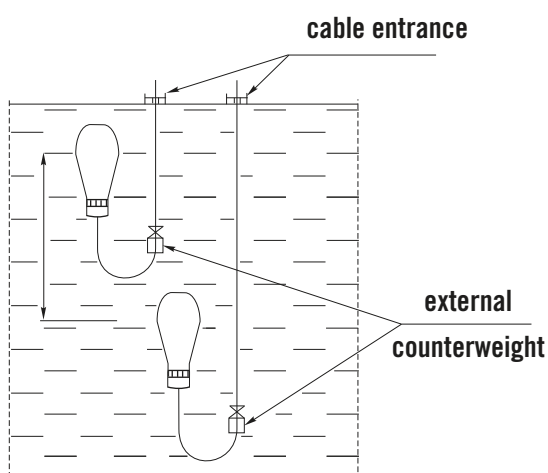

wiring diagram  
for filling pump

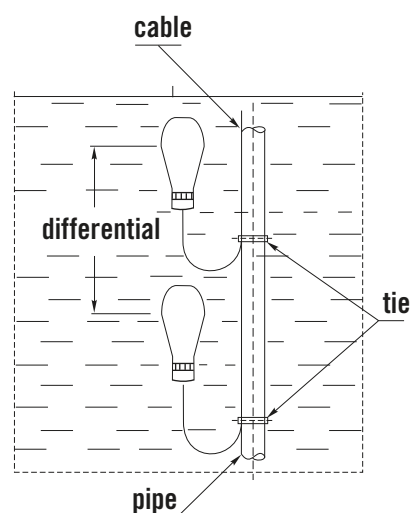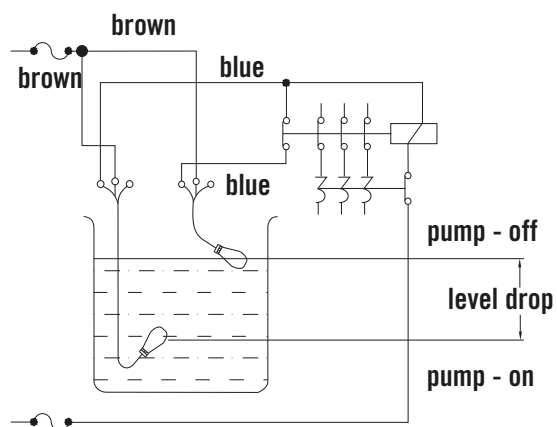

wiring diagram  
for emptying pump

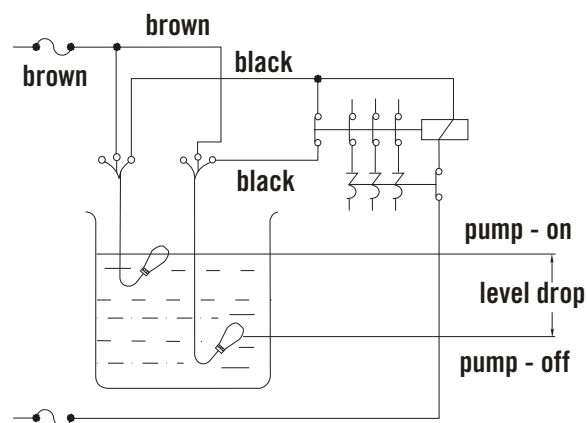

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sensata:

[LM10AW](#) [LM10BW](#) [LM10CW](#)