

D1 Series

D Size Form C (Changeover) Relay



The D1 series is a reed relay with changeover contacts which are often used in safety critical applications.

The switching is achieved through the use of high vacuum reed switches with tungsten contacts. These relays suitable for high reliability applications, such as test equipment and high voltage power supplies.

These are PCB mount relays, although custom options may be available on request.

- 100W switching power
- Changeover contacts
- UL Approved
- PCB Mount
- Available with or without magnetic screen




Contact Specification	Unit		Condition		
Switch Action			SPCO		
Contact Material			Tungsten		
Isolation across contacts	kV	DC or AC peak	0.75		
Isolation contact to coil	kV	DC or AC peak	3		
Switching Power Max.	VA	resistive	100 (at 33.3Vdc switching voltage)		
Switching Voltage Max.	V	DC	240 (at 20VA switching power)		
Switching Current Max.	A	DC	3 (at 100VA switching power and 33Vdc switching voltage)		
Carry Current Max	A	DC	4		
Capacitance across contacts	pF	coil to screen grounded	2.3		
Contact Resistance	mΩ	max (typical)	500		
Insulation Resistance	Ωmin	(typical)	(10 ⁹)		
Coil Specification			5V	12V	24V
Must Operate Voltage	V	DC	3.75	9	18
Must Release Voltage	V	DC	0.5	1.2	2.4
Resistance	Ω	(± 10%)	50	340	900



Note: The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)

Note: The operate / release voltage and coil resistance will change at a rate of 0.4 % per degree C, values are stated at room temperature (20 degrees C)

Environmental Conditions		
Operating Temperature Range °C	-40 to +65	
Storage Temperature Range °C	-40 to +100	
Standard Parts	Coil Voltage Vdc	Magnetic Screen
D1-05-C	5	No
D1-05-CM	5	Yes
D1-12-C	12	No
D1-12-CM	12	Yes
D1-24-C	24	No
D1-24-CM	24	Yes

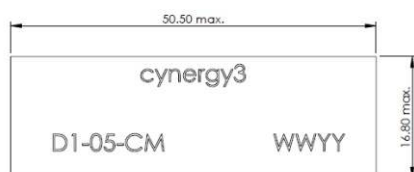

Circuit Diagram

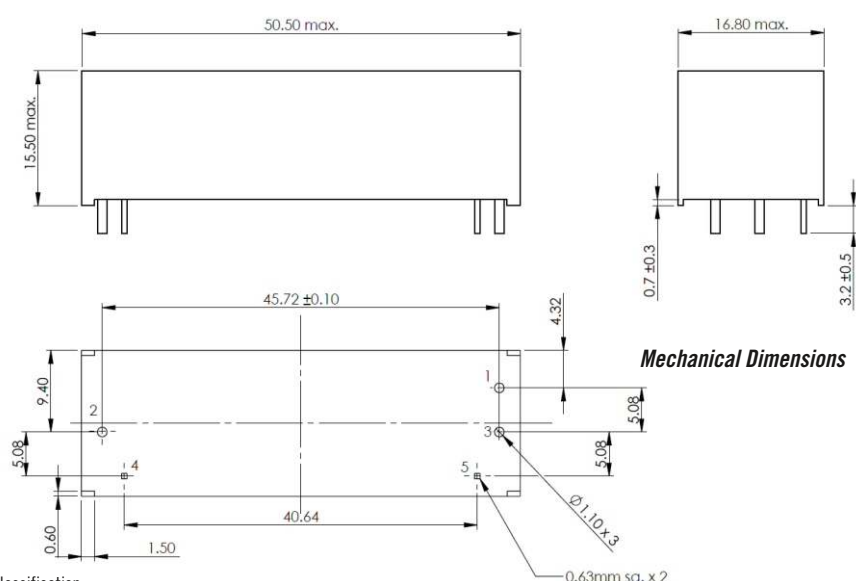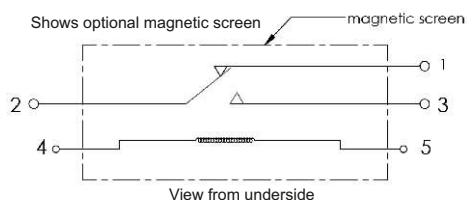

*Consult factory for UL ratings

These products have been UL approved for use as per pollution degree 2 classification.

If you require further information as to how this may affect product usage, please contact sales@cynergy3.com.

Cynergy3 Components Ltd. 7 Cobham Road, Ferndown Industrial Estate, Wimborne, Dorset, BH21 7PE, United Kingdom
Telephone: +44 (0)1202 897969 Email: c3w_sales@sensata.com

ISO9001 CERTIFIED

cynergy3-d1-v2



Made in the UK

www.cynergy3.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sensata:

[D1-05-C](#) [D1-05-CM](#) [D1-12-C](#) [D1-12-CM](#) [D1-24-C](#) [D1-24-CM](#)