



## **DB(UL)** Series

## UL Approved\* Normally Closed, High Voltage Relays - 10kV, 7.5kV & 5kV



Recently approved by UL, very high isolation voltages (up to 10kV) are achieved through the use of high vacuum reed switches with either rhodium or tungsten contacts and make these relays suitable for high reliability applications, such as cardiac defibrillators, test equipment and high voltage power supplies.

A choice of 5kV, 7.5kV and 10kV isolation voltages is available

The rhodium contact relays have low contact resistance, while the tungsten contact relays can switch higher voltages, up to 7000V DC/AC peak.

PCB or panel mount, via nylon studs, versions are available.

Connection options, for the HV, include PCB, solder turret(wire wrap), flying lead and 0.25" spade terminals.

Cynergy3 Components Ltd. 7 Cobham Road Ferndown Industrial Estate Wimborne, Dorset BH21 7PE, UK *T*elephone: +44 (0)1202 897969 Email: c3w\_sales@sensata.com

IS09001certified

cynergy3-db-ul-v3

- Choice of 10kV, 7.5kV or 5kV isolation
- Low contact resistance
- PCB or panel mount
- HV connections via flying leads, solder turret (wire wrap), or 1/4" spade terminals
- Excellent AC characteristics



Contact Specification	Unit	Condition	1	OkV	7.5	ikV	51	۲V	
Contact Form					N/C (norn	nally colsed	)		
Contact Material			Rhodium	Tungsten	Rhodium	Tungsten	Rhodium	Tungsten	
Isolation across contacts	s kV	DC or AC peak	10	10	7.5	7.5	5	5	
Switching Power Max.	W		50	50	50	50	50	50	
Switching Voltage Max.	٧	DC or AC peak	1000	7000	1000	5000	1000	3500	
Switching Current Max.	Α	DC or AC peak	3	2	3	2	3	2	
Carry Current Max	Α	DC or AC peak	4	3	4	3	4	3	
Capacitance across	рF	coil to screen	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	
contacts		grounded							
Lifetime operations		dry switching	10 <sup>9</sup>	10 <sup>9</sup>	10°	10 <sup>9</sup>	10 <sup>9</sup>	10°	
		50W switching	10 <sup>6</sup>	$10^{6}$	10 <sup>6</sup>	$10^{6}$	10 <sup>6</sup>	10 <sup>6</sup>	
Contact Resistance	mΩ	e max (typical)	50 (15)	250(100)	50 (15)	250(100)	50 (15)	250(100)	
Insulation Resistance	$\Omega$ m	in (typical)	10 <sup>10</sup>	(10 <sup>13</sup> )	1010	(10 <sup>13</sup> )	10 <sup>10</sup>	(10 <sup>13</sup> )	
Coil Specification				5\	/ 1	2V	24V		
Must Operate Voltage	٧	DC		3.7	7	9	20		
Must Release Voltage	٧	DC		0.5	5	1.25	4		
Operate Time	ms	diode fitted		2.0	0	2.0	2.0		
Release Time	ms	diode fitted		3.0	0	3.0	3.0		
Resistance	Ω			38	3	240	925		
Note. The operate / release voltage and coil resistance will change at a rate of 0.4% per degree C. Values are stated at room temperature (20 degrees C)									
Relay Specification									
Isolation contact/coil	kV	DC or AC peak				17			
Insulation resistance contact									
to all terminals	$\Omega$ m	in (typical)		10 <sup>10</sup> (10 <sup>13</sup> )					
Environmental									
Operating Temp range	°C			-20 to +70					

#### \*Consult factory for UL ratings

These products have been UL approved for use as per pollution degree 2 classification.

Made in the UK

If you require further information as to how this may affect product usage, please contact sales@cynergy3.com.

#### **Part Numbering System**

1

1

	DBI/1210
<b>Reed Switch Size</b>	
<b>Contact Form</b> $B = n/c$	
Contact Material	
T=Tungsten R= Rhodium	
Moulding Ref. No.	
<b>Coil Voltage</b> 05=5Vdc, 12=12Vdc, 24=24Vdc	
Isolation between	
Contacts	
10=10kV	
75=7.5kV	
05=5kV	

- "U" indicates UL approved

#### **Mounting or Connection Style**

U


No suffix indicates PCB mount F=PCB mount & coil connection with Flying lead HV connection P=Panel mount with wire wrap terminals S=PCB mount & coil connection with stud fixing & 1/4" spade HV connection T=PCB mount & coil connection with stud fixing & wire wrap HV connection

www.cynergy3.com

© 2020 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.



# C<sup>3</sup>

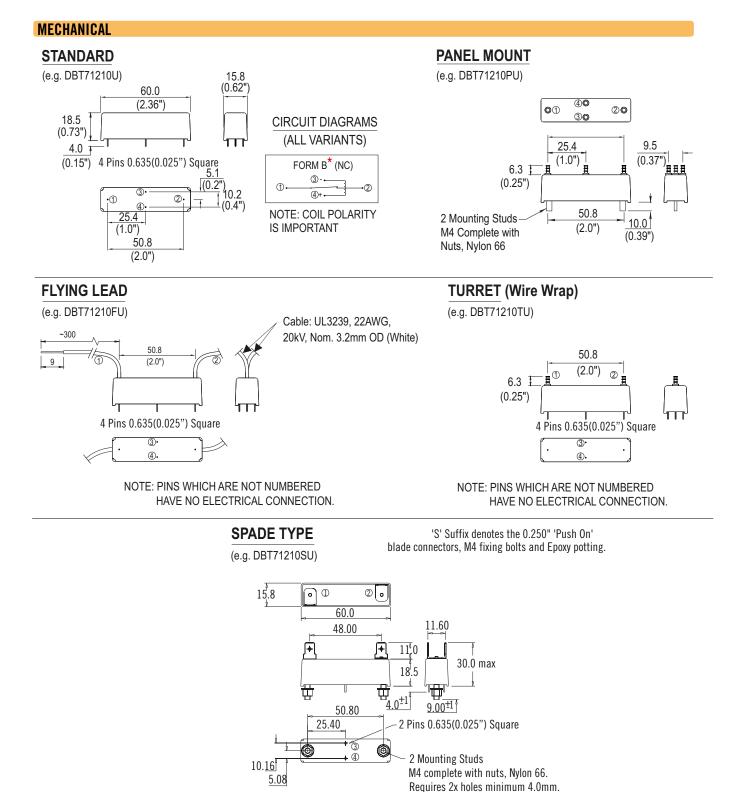

IS09001certified

### www.cynergy3.com

© 2020 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sensata:

DBT72410U DBT72475U DBT71210U DBT71205U DBT70510U DBT70575U DBT70505U DBR70510U