

| IBAT-1

TADIRAN 3.6V LITHIUM THIONYL CHLORIDE C BATTERY WITH STANDARD TERMINAL TYPE



Tadiran lithium thionyl chloride 3.6 V batteries deliver maximum voltage upon start up and are perfect for devices that require a stable and reliable power source.

High energy density levels, allowing them to be used in a variety of applications such as metering, sensing and security devices.

They offer far superior battery life than standard batteries and can offer up to 10 years life expectancy making them ideal for use in a range of high energy consuming and standalone applications and are used in a variety of industries such as Aerospace, Military, Medical and Automotive.

Features

- 3.6 volts
- Lithium thionyl chloride
- Very high energy density
- Level discharge characteristics
- Wide operating temperature
- Ideal for use in any of our IWT range of Wireless Transmitters

SPECIFICATIONS

Technical

System	Lithium Thionyl Chloride
Nominal Voltage	3.6V
Nominal Capacity	8.5Ah
Nominal Current	3mA
Max. Continuous Discharge Current	230mA
Pulse Current Capability	400mA
Anode Surface Area	30cm ²
Lithium Content	2.5g
Weight	49.5g
Volume	26 cm ³
Temperature Range	-55°C ... +85°C



(Typical values for batteries stored at +25°C for one year)



DIMENSIONS

All dimensions are in millimeters.

SL-2770/S

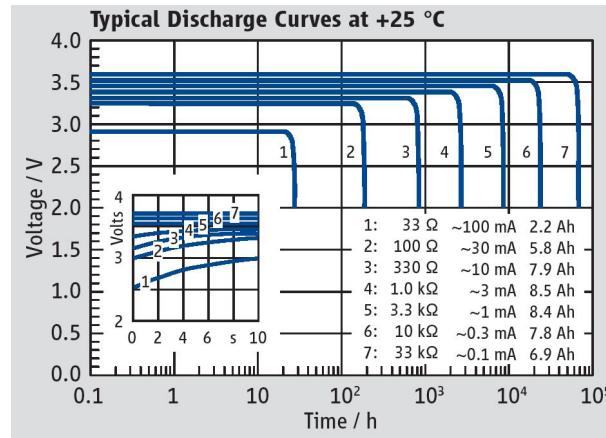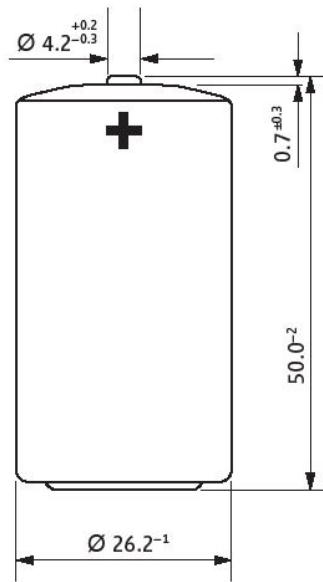

Made in the UK

Page 2

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

EUROPE
+44 (0)1202 897969
c3w_sales@sensata.com
Cynergy3 Components Ltd.
7 Cobham Road,
Ferndown Industrial Estate,
Wimborne, Dorset,
BH21 7PE, United Kingdom

USA
+1 310 561 8092 / +1 866 258
5057
c3w_sales@sensata.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sensata:](#)

[IBAT-1](#)