

VCCR300

DATASHEET

Single Output Conduction Cooled DC/DC



7.43" x 4.6" x 1"

Low profile

300W | 600W | 900W

Scalable

33.6-160V_{DC}

Wide input voltage range

Fan-less

Reliable

Ruggedised for long term reliability

The VCCR300 conduction cooled power series provide a rugged and highly reliable DC/DC power source that can deliver a silent 300 Watts of power in a 7.43 x 4.6 x 1-inch low profile package. The wide DC input voltage range covers the full requirements for standard 48V, 72V, 96V and 110V railway battery requirements detailed in EN50155 and suitable for a variety of Battery Electric Vehicle (BEV) and other demanding industrial applications. The high efficiency design minimises heating which results in a wide operating temperature range of -40°C to +70°C (+85°C 10 mins) with minimal cooling requirement. Standard output voltages available are 12V, 24V, 36V and 48V all of which have a wide adjustment range of 90% to 125%. Protections include over-voltage, over-current and over-temperature are provided while DC_OK and warning signals indicate the status of the PSU. An adjustable droop mode current share allows multiple units to be parallel connected to achieve higher power levels whilst sharing the load equally between each VCCR300 product. Internal fusing and 10ms full power holdup are included as standard. A remote shutdown signal can place the unit in a low power standby mode and the input undervoltage level can be programmed to meet specific application requirements. The series meets the requirements of the latest railway standards (EN50155), MIL-STD-810G (Shock & Vibration) and is approved to the latest industrial safety standards (IEC/UL62368-1 3RD Edition). EMC emissions and immunity exceed the requirements of EN50121-3-2, EN55035 and EN55032 class B.

MAIN FEATURES & BENEFITS




- | | | |
|--|--|--|
| • Powerful 300 Watts output | • Programmable undervoltage protection | • Silent operation |
| • Small 7.43" x 4.6" x 1" low profile, 8.77W/in ³ | • Output current measurement signal | • RoHS2 & REACH compliant |
| • Fan-less & conduction cooled | • Remote shutdown | • CE & UKCA compliant |
| • Wide input voltage range (33.6V _{DC} – 160V _{DC}) | • Extensive protections & system warnings | • Low EMC emissions (EN55032:2020 Class B) |
| • Standard output voltages of 12, 24, 36 & 48 | • Holdup as standard (10mS 300W) | • MIL-STD-810G (Vibration & Shock) |
| • Adjustable output voltage (90% to 125%) | • Low inrush current | • IEC62368-1:2018 (Industrial Safety) |
| • High efficiency - up to 94% | • Operating altitude up to 4000m | • EN50155-1:2021 (Railway General) |
| • Scalable power architecture | • Protective conformal coating as standard | • EN50121-3-2:2019 (Railway EMC) |
| • High reliability design | • Rugged chassis mount package | • EN45545 (Fire & Smoke) |
| • Low no-load & standby power | • 24 hrs samples from distribution | • Expert technical support |
| • Wide operating temperature range (-40°C to +70°C, +85°C 10 mins) | | • 5 year warranty |



MODEL SELECTION & ORDERING

Model	V _{NOM} (V)	V _{MIN} (V)	V _{MAX} (V)	I _{RATED} (A)	P _{RATED} (W)	V _{OVP} (%V _{SET})	V _{SCP} (%V _{SET})	I _{OCP} (%I _{RATED})	Efficiency ⁽¹⁾ (%)
VCCR300-12	12	10.8	15	25	300	115	60	110	92
VCCR300-24	24	21.6	30	12.5	300	115	60	110	93
VCCR300-36	36	32.4	45	8.33	300	115	60	110	93
VCCR300-48	48	43.2	60	6.25	300	115	60	110	93

1. Vin = 110V, Vo = V_{NOM}, 100% load.

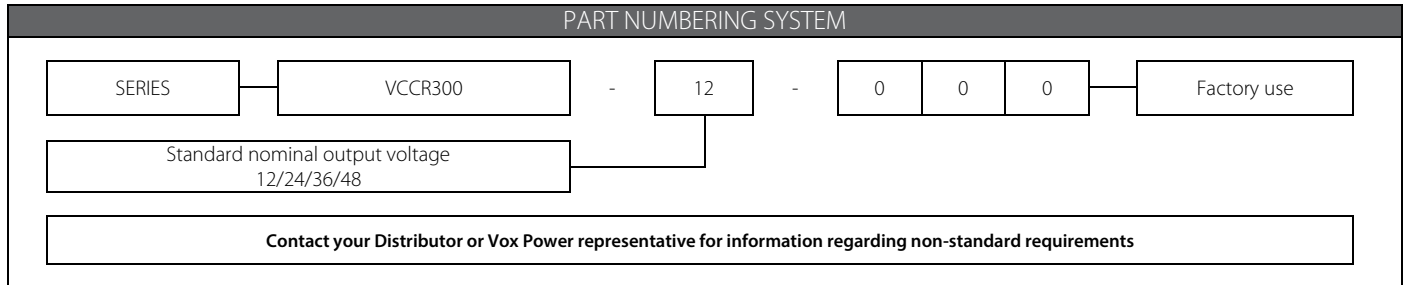

SPECIFICATIONS

All specifications are measured @ T_A=T_{BASE}= 25°C, rated input & rated load unless stated otherwise

ELECTRICAL SPECIFICATIONS					
Parameter	Details	Min	Typical	Max	Units
DC Input Voltage	Continuous operation at 300W output power Under voltage transient < 100mS, output unaffected. Over voltage transient < 1S, output unaffected.	33.6 28.8	48/72/96/110	160 - 168	V _{DC}
Input under voltage lockout	User programmable. Default to minimum.	30		100	V _{DC}
Input Current	300Watts output. Typical at 48 V _{DC} input, max at 33.6V _{DC} input.		6.8	10	Amps
Input Power Limit	All Vin			400	Watts
Inrush Current	Holdup capacitor charging. 33.6V _{DC} input.			12	Amps
Input capacitance	EMI filter charge current is not limited by inrush controller		5		uF
Fusing	Positive line fused (5x20 Fast acting, 1500A breaking capacity).			15	Amps
Holdup	300Watts output, EN550155 Class S2 180Watts output, EN550155 Class S3	10 20	12 22		mS
No load power consumption	0% Load		1	1.5	Watts
Standby current consumption	Unit in standby mode.		3.5	5	mA
Output Power Rating				300	Watts
Output Voltage	All Models. Initial Setting, -40°C to 85°C	-1		1	%V _O
Load Regulation	All Models.	-50		50	mV
Line Regulation	All Models.	-0.1		0.1	%V _O
Ripple & Noise ³	All Models. 20MHz BW, V _{PKPK} .			1	%V _O
Minimum Load	All Models.			0	Watts
Transient Response	25% to 75% I _{RATED} , 1A/uS. Recovery to within 10% of V _O .			5 1	%V _O mS
Turn on Rise Time	All Models. 10% to 90% of V _O .		35		mS
Turn on Delay	All Models, All Vin, All loads. Application of input voltage User Shutdown release		600 600		mS
Current Share	All Models. Droop mode, Vmax @0% load, Vmin @100% Load.	-2.5%		+2.5%	%V _O
Temperature Coefficient	All Models.	-0.02		0.02	%V _O /°C
Over Current Protection	All Models. Constant current mode.	105	110	115	%I _{RATED}
Short Circuit Protection	All Models. Hiccup mode. Activation Threshold.		60		%V _O
Over Voltage Protection	All Models. Auto Restart.		115		%V _O
Over Temperature Protection	All Models. Auto Restart.	115		125	°C
Reliability ⁽¹⁾	All Models.		0.5		FPMH ⁽²⁾
Warranty	Standard terms and conditions apply.			5	Years
Size	188.6 [7.425] (L) x 116 [4.57] (W) x 25.4 [1.00] (H). See diagram for all other dimensions and tolerances.				mm [in]
Weight	800				Grams
Notes	1. 30°C base & ambient, 100% load, SR332 Issue 3 Method I, Case 3, Ground, Fixed, Controlled 2. MTBF (Mean Time Between Failures) = 1/FPMH (Failures Per Million Hours) 3. Maximum 2% of Vo when in burst mode.				

COMPLIANCE TEST SUMMARY (EN50155:2021)					
Test	Category ⁽¹⁾	Subclause ⁽²⁾	Standard	Test Details	Status
Visual inspection	R, T	13.4.1	Internal	dimensions, weight, markings	Not operating
Performance	R, T	13.4.2	Internal	Electrical specifications	Operating
DC power supply	T	13.4.3	EN50155:2021 IEC/EN61000-4-29	See EMC compliance tables	See EMC compliance tables
Low temperature start	T	13.4.4	IEC/EN60068-2-1:2007	Test Ad, Class OT4 -40C	Not operating. Criterion A
Dry heat	T	13.4.5	IEC/EN60068-2-2:2007	Test Bd, Cycle C – Class OT4 -ST2 +85C (10min), +70C (6h)	Operating. Criterion A
Insulation	R, T	13.4.7	EN50155:2021	See Safety & insulation specifications	Not operating
Cyclic damp heat	T	13.4.8	IEC/EN60068-2-30:2005	Test Db2, 25°C to 55°C, 2 cycles, 2x24h	Not operating. Criterion A
Electromagnetic compatibility	T	13.4.9	EN50121-3-2	See EMC compliance tables	See EMC compliance tables
Shock and vibration	T	13.4.10	EN61373:2010	See Environmental specifications	See Environmental specifications
Stress screening	R	13.4.11	Internal	24h at 45°C, 100% load ⁽³⁾	Operating. Criterion A
Salt mist	T	13.4.13	IEC/EN60068-2-11	Test Ka, 35°C ±2°K, 48h	Not operating. Criterion A
Notes: 1. R = Routine test, T = Type test 2. Subclauses refer to EN50155:2021 3. Test time reduction plan according to IPC9592B appendix E. (E.2.1.2 tables E-2 and E-1)					

ELECTROMAGNETIC COMPLIANCE – EMISSIONS			
Phenomenon	Port	Reference Standards	Test Details
Radiated emissions, electric field	Enclosure	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.7 EN61000-6-4 tbl.1 EN55032/CISPR16-1-1	30MHz to 1GHz. EN50032 Class B compliant. Exceeds the requirements of EN50121-3-2:2016
Conducted emissions	Battery power supply	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.7 tbl.2.1 EN55032/EN55016-2-1	150kHz to 30MHz EN50032 Class B compliant. Exceeds the requirements of EN50121-3-2:2016

ELECTROMAGNETIC COMPLIANCE – IMMUNITY				
Phenomenon	Port	Reference Standards	Test Details	Performance ⁽¹⁾
Electrostatic discharge	Enclosure	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.5.3 IEC61000-4-2	Test level 3: ±8kV air, ±6kV contact	Criteria A
Radiated RF EM field, AM	Enclosure	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.5.1 IEC61000-4-3	20V/m, 80MHz-800MHz, sine wave, AM 80%, 1kHz	Criteria A
Radiated RF EM field	Enclosure	EN55035:2017 cl.5 tbl.1.3 EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.5.2 IEC61000-4-3	Test levels as per EN50121-3-2 table 5, item 5.2 & EN55035:2017 Table 1, item 1.3	Criteria A
Electrical Fast Transients/burst	Battery power supply	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.3.2 IEC61000-4-4	Test Level 3: ±2kV, 5/50nS, 5kHz, Direct coupling	Criteria A
Electrical Fast Transients/burst	Control	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.4.2 IEC61000-4-4	Test Level 4: ±2kV, 5/50nS, 5kHz, Capacitive clamp coupling	Criteria A
Surge	Battery power supply	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.3.3 IEC61000-4-5	1.2/50uS, 42Ω, 0.5uF, ±1kV L-L & ±2kV L-E 1.2/50uS, 12Ω, 9uF, ±1kV L-L & ±2kV L-E	Criteria A
Conducted disturbances induced by RF field	Battery power supply	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.3.1 IEC61000-4-6	Test Level 3: 10V, 0.15 to 80MHz, sine wave, AM 80%, 1kHz	Criteria A
Conducted disturbances induced by RF field	Control	EN50155:2021 cl.13.4.9 EN50121-3-2:2016 cl.8 tbl.4.1 IEC61000-4-6	Test Level 3: 10V, 0.15 to 80MHz, sine wave, AM 80%, 1kHz	Criteria A
Temporary supply overvoltage	Battery power supply	EN50155:2021 cl.13.4.3.3 IEC61000-4-29	110V to 168V for 100ms & 1s	Criteria A
Temporary supply undervoltage	Battery power supply	EN50155:2021 cl.13.4.3.4 IEC61000-4-29	48V to 28.8V for 100ms	Criteria A
Interruptions of supply voltage	Battery power supply	EN50155:2021 cl.13.4.3.5 IEC61000-4-29 ⁽²⁾	Interruption for 10ms at 300W load. EN50155:2021 Class S2 Interruption for >10ms at 300W load Interruption for 20ms at 180W load. EN50155:2021 Class S3 Interruption for >20ms at 180W load	Criteria A Criteria C Criteria A Criteria C
Supply change-over	Battery power supply	EN50155:2021 cl.13.4.3.6 IEC61000-4-29	48V to 28.8V for 100ms. Class C1 48V to open circuit for 30ms. Class C2	Criteria A Criteria B
Notes: 1. Performance criteria are defined in EN50155:2021 cl.4.3 2. Tested at minimum nominal input voltage. (48V)				


ENVIRONMENTAL SPECIFICATIONS				
Parameter	Details	Min	Max	Units
Operating temperature	Continuous, Full output power, EN 50155:2021 Class OT4	-40	+70	°C
Switch on temperature	10 minutes maximum, Full output power, EN 50155:2021 Class ST1 & ST 2		+85	°C
Case temperature	Measured at location shown in mechanical drawing		+90	°C
Storage Temperature	Not operational	-55	+85	°C
Humidity	Relative, non-condensing	5	95	%
Altitude class		-200	4000 ⁽¹⁾	m
Pollution degree	PD2			
Protective coating	Class PC2. Internal assemblies dip coated			
Ingress protection	IP30			
Fire behaviour	EN45545-1:2013 & EN45545-2:2020 & EN45545-5:2013+A1:2015, HL1 to HL3			
Simulated long life	EN50155:2021 cl. 13.4.10.2, EN61373:2010 cl.9	5.72		m/s ²
	Not Operating	5	150	Hz
		15 ⁽³⁾		h
Mechanical Shock	EN50155:2021 cl. 13.4.10.3, EN61373:2010 cl.10, IEC60068-2-27	50		m/s ²
	Operating. Performance criteria A	30		ms
		18 ⁽²⁾		Bumps
Functional random vibration	EN50155:2021 cl. 13.4.10.4, EN61373:2010 cl.8	1.01		m/s ²
	Category 1, Class B, Body mounted	5	150	Hz
	Operating. Performance criteria A	30		min
Mechanical Shock	IEC60068-2-27: Half sine, 3 axes, 3 positive & 3 negative. Non-Operational		50,11	g,mS
	IEC60068-2-27: Half sine, 3 axes, 3 positive & 3 negative. Operational		30,18	g,mS
	MIL-STD-810G: Method 516.6, Procedure IV, Transit drop			
Vibration	IEC60068-2-6: Sine, 10 – 500 Hz, 3 axes, 1 oct/min., 10 cycles each axis. Operational		2	g
	IEC60068-2-64: Random, 5 – 500 Hz, 3 axes, 30 min. Operational		0.0122,3.15	g ² /Hz,g _{RMS}
	IEC60068-2-64: Random, 5 – 500 Hz, 3 axes, 30 min. Non-Operational		0.02,2.56	g ² /Hz,g _{RMS}
Vibration	MIL-STD-810G: Method 514.6, Procedure I (General Vibration)			
	Category 4 (Trucks & Trailers, Composite wheeled vehicle), Figure 514.6C-3			
	Category 7 (Aircraft, Jet cargo), Figure 514.6C-5 General exposure			
Thermal Shock	Category 24, (All, Minimum integrity) Figure 514.6E-1			
	MIL-STD-810G: Method 503.5 Procedure I-C. Multi-cycle. 3 shocks. Non-operational.	-51	85	°C
Notes	1. Additional power derating may be necessary at high altitudes to ensure component temperatures remain within specification. 2. 3 positive and 3 negative bumps in each axis 3. 5 hours each axis			

SAFETY & INSULATION SPECIFICATIONS				
Barrier	Rating	Voltage withstand ⁽³⁾ (V _{DC})	Creepage distance ⁽²⁾ (mm)	Insulation resistance ⁽¹⁾ (MΩ)
Input to Output	Reinforced	5400	5	>300
Input to Chassis	Basic	3400	3.5	>300
Output to Chassis	Basic	2000	3.5	>300
1. Insulation resistance tested at 500V _{DC} 2. Material group IIIb, Pollution degree PD2 & Overvoltage category OV3 as defined in EN50124-1:2017 3. Tested in production 4. Insulation coordination complies with EN50124-1:2017 & EN62368-1:2018				

INSTALLATION SPECIFICATIONS			
Parameter	Details	Parameter	Details
Equipment class (EN62368-1:2018)	I	Flammability Rating (EN62368-1:2018)	94V-2
Overvoltage category (EN50124-1:2017)	OV3	Material Group	IIIb
Pollution degree	PD2	Ingress protection rating	IP30


AGENCY APPROVALS		
Standard	Details	File
IEC 62368-1:2018	3 rd Edition. Audio/video, information and communication technology equipment - Part 1: Safety requirements	UL: E316486
UL 62368-1:2019	3 rd Edition. Audio/video, information and communication technology equipment - Part 1: Safety requirements	
CSA-C22.2 No. 62368-1:2019	3 rd Edition. Audio/video, information and communication technology equipment - Part 1: Safety requirements	
CE	LVD 2014/35/EU, EMC 2014/30/EU, RoHS 2 2011/65/EU	
UKCA	Safety SI 2016 No 1101, EMC SI 2016 No 1091, RoHS SI 2012 No. 3032	
Approval certificates available at www.vox-power.com		

MECHANICAL DIMENSIONS AND MOUNTING

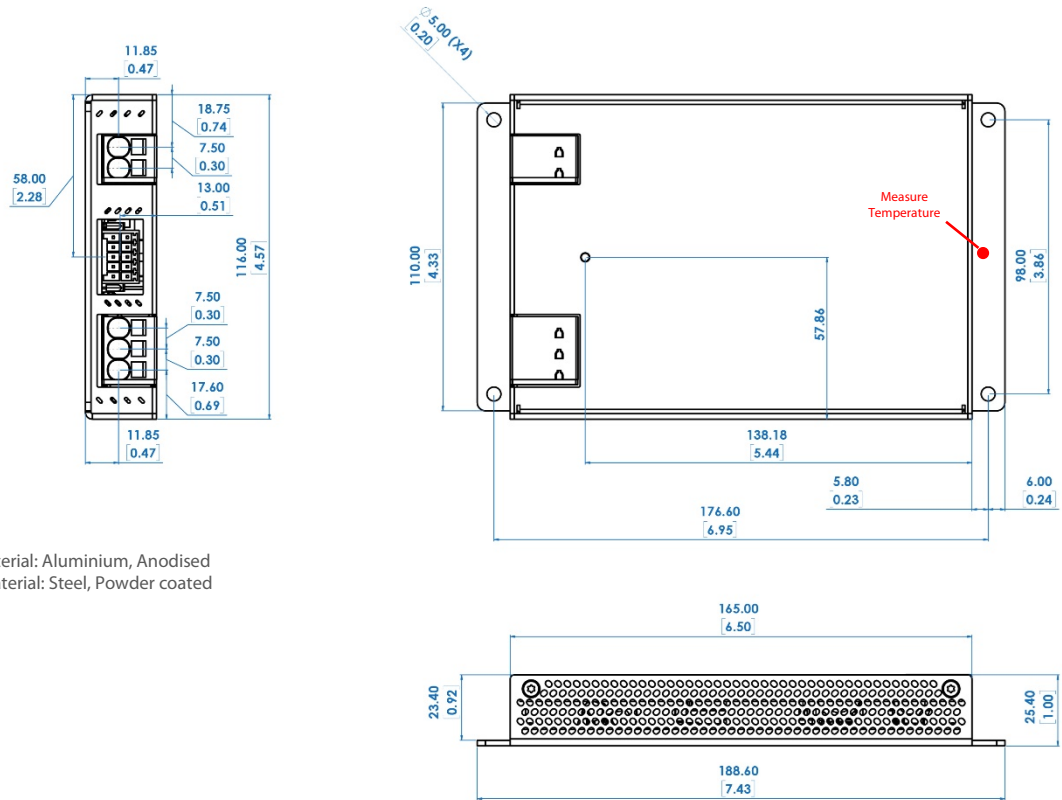

Chassis base material: Aluminium, Anodised
Chassis cover material: Steel, Powder coated

CONNECTORS AND PINOUT

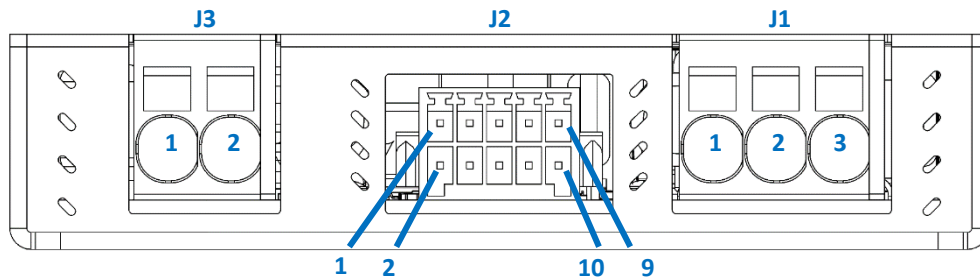

J3 - DC output voltage	
WAGO 2626-1102/020-004	
Pin	Function
1	Positive
2	Negative

J2 - User Controls	
WAGO 713-1425/037-000, Mating: WAGO 713-1105/037-047	
Pin	Function
1	Output voltage adjust (VOUT_ADJ)- Connect to SCOM through a resistor
2	Secondary common (SCOM) - Internally connect to J3 Pin 2
3	Droop input (DROOP) - Connect to IOUT through a resistor
4	Output current measurement (IOUT)
5	WARN - Open drain output. Active Low.
6	DC_OK - Open drain output. Active Low.
7	BLANK
8	BLANK
9	Shut Down & Under voltage adjust (SD_UV) Connect to VIN_NEG through resistor for under voltage adjust. Close switch VIN_NEG to SD_UV for shutdown.
10	Primary negative (VIN_NEG) - Internally connect to J1 Pin 1

J1 - DC input voltage	
WAGO 2626-1103/020-004	
Pin	Function
1	Negative
2	Positive
3	Protective Earth

All specifications are believed to be correct at time of publishing. Vox Power Ltd reserves the right to make changes to any of its products and to change or improve any part of the specification, electrical or mechanical design or manufacturing process without notice. Vox Power Ltd does not assume any liability arising out of the use or application of any of its products and of any information to the maximum extent permitted by law. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any products of Vox Power Ltd. VOX POWER LTD DISCLAIMS ALL WARRANTIES AND REPRESENTATIONS OF ANY KIND WHETHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF SUITABILITY, FITNESS FOR PURPOSE, MERCHANTABILITY AND NON-INFRINGEMENT. Please consult your local distributor or Vox Power directly to ensure that you have the latest revision before using the product and refer to the latest relevant user manual for further information relating to the use of the product. Unless specifically otherwise agreed in writing by Vox Power, products sold by Vox Power are not intended for use in connection with life support systems, human implantations, nuclear facilities or systems, aircraft spacecraft, military or naval missile, ground support or control equipment used for the purpose of guidance navigation or direction of any aircraft spacecraft or military or naval missile or any other application where product failure could lead to loss of life or catastrophic property damage. The user will indemnify and hold Vox Power harmless from any loss, cost or damage resulting from its breach of the provisions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[VOX Power:](#)

[VCCR300-12](#) [VCCR300-24](#) [VCCR300-36](#) [VCCR300-48](#)