

SERIES: PUZ3-D | **DESCRIPTION:** DC-DC CONVERTER

FEATURES

- 3 W isolated output
- smaller package
- single/dual regulated output
- 1,500 Vdc isolation
- short circuit protection
- temperature range (-40~105°C)
- high efficiency at light load
- efficiency up to 86%
- EN/BS EN 62368-1 certified



MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple and noise ² max (mVp-p)	efficiency typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
PUZ3-D5-S5-D ³	5	4.5~9	5	30	600	3	80	74
PUZ3-D5-S12-D ³	5	4.5~9	12	12	250	3	80	77
PUZ3-D5-S15-D ³	5	4.5~9	15	10	200	3	80	77
PUZ3-D5-D5-D ³	5	4.5~9	±5	±15	±300	3	80	76
PUZ3-D5-D12-D ³	5	4.5~9	±12	±6	±125	3	80	78
PUZ3-D5-D15-D ³	5	4.5~9	±15	±5	±100	3	80	78
PUZ3-D12-S3-D ³	12	9~18	3.3	46	909	3	80	74
PUZ3-D12-S5-D ³	12	9~18	5	30	600	3	80	81
PUZ3-D12-S12-D ³	12	9~18	12	12	250	3	80	83
PUZ3-D12-S15-D ³	12	9~18	15	10	200	3	80	82
PUZ3-D12-S24-D ³	12	9~18	24	6	125	3	80	83
PUZ3-D12-D5-D ³	12	9~18	±5	±15	±300	3	80	81
PUZ3-D12-D9-D ³	12	9~18	±9	±8	±166	3	80	84
PUZ3-D12-D12-D ³	12	9~18	±12	±6	±125	3	80	84
PUZ3-D12-D15-D ³	12	9~18	±15	±5	±100	3	80	85
PUZ3-D24-S3-D ³	24	18~36	3.3	46	909	3	80	78
PUZ3-D24-S5-D ^{1,3}	24	18~36	5	30	600	3	80	81
PUZ3-D24-S12-D ³	24	18~36	12	12	250	3	80	86
PUZ3-D24-S15-D ³	24	18~36	15	10	200	3	80	86
PUZ3-D24-S24-D ³	24	18~36	24	6	125	3	80	85
PUZ3-D24-D5-D ³	24	18~36	±5	±15	±300	3	80	82
PUZ3-D24-D12-D ³	24	18~36	±12	±6	±125	3	80	84
PUZ3-D24-D15-D ³	24	18~36	±15	±5	±100	3	80	84
PUZ3-D48-S3-D	48	36~75	3.3	46	909	3	80	76
PUZ3-D48-S5-D	48	36~75	5	30	600	3	80	82
PUZ3-D48-S12-D	48	36~75	12	12	250	3	80	86
PUZ3-D48-S15-D	48	36~75	15	10	200	3	80	86

Notes: 1. UL approved
 2. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 µF ceramic and 10 µF electrolytic capacitors on the output.
 3. Model is not CE certified.

Notes:

1. UL approved
2. Ripple and noise are measured at 20 MHz BW by "parallel cable" method with 1 μ F ceramic and 10 μ F electrolytic capacitors on the output.
3. Model is not CE certified.

PUZ3 - DXX - XXX - D

Base Number Input Voltage Output
S = single
D = dual Output Voltage Packaging Style
DIP

parameter	conditions/description	min	typ	max	units
operating input voltage	5 Vdc input models	4.5	5	9	Vdc
	12 Vdc input models	9	12	18	Vdc
	24 Vdc input models	18	24	36	Vdc
	48 Vdc input models	36	48	75	Vdc
start-up voltage	5 Vdc input models			4.5	Vdc
	12 Vdc input models			9	Vdc
	24 Vdc input models			18	Vdc
	48 Vdc input models			36	Vdc
surge voltage	for maximum of 1 second				
	5 Vdc input models	-0.7		12	Vdc
	12 Vdc input models	-0.7		25	Vdc
	24 Vdc input models	-0.7		50	Vdc
	48 Vdc input models	-0.7		100	Vdc
filter	pi filter				

parameter	conditions/description	min	typ	max	units
line regulation	full load, input voltage from low to high		±0.2	±0.5	%
load regulation	5% to 100% load		±0.2	±0.5	%
voltage accuracy	5% to 100% load		±1	±3	%
no-load voltage accuracy	input voltage range		±1.5	±5	%
voltage balance ³	dual output, balanced loads		±0.5	±1	%
switching frequency	PFM mode, 100% load, nominal input voltage		200		kHz
transient recovery time	25% load step change		0.5	2	ms
transient response deviation	25% load step change		±2	±5	%
temperature coeffecient	100% load		±0.02	±0.03	%/°C

parameter	conditions/description	min	typ	max	units
short circuit protection ⁴				1	s

cui.com

SAFETY AND COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	input to output for 1 minute at 1 mA max.	1,500			Vdc
isolation resistance	input to output at 500 Vdc	1,000			MΩ
safety approvals ¹	certified to 60950-1: UL certified to 62368-1: EN, BS EN				
conducted emissions	CISPR22/EN55022, class A; class B (external circuit required, see Figure 1-b)				
radiated emissions	CISPR22/EN55022, class A; class B (external circuit required, see Figure 1-b)				
ESD	IEC/EN61000-4-2, class B, contact $\pm 4\text{kV}$ /air $\pm 8\text{kV}$				
radiated immunity	IEC/EN61000-4-3, class A, 10V/m				
EFT/burst	IEC/EN61000-4-4, class B, $\pm 2\text{kV}$ (external circuit required, see Figure 1-a)				
surge	IEC/EN61000-4-5, class B, $\pm 2\text{kV}$ (external circuit required, see Figure 1-a)				
conducted immunity	IEC/EN61000-4-6, class A, 3 Vr.m.s				
voltage dips & interruptions	IEC/EN61000-4-29, class B, 0%-70%				
MTBF	as per MIL-HDBK-217F @ 25°C	1,000,000			hours
RoHS	2011/65/EU				

Notes: 1. See specific model noted on page 1

ENVIRONMENTAL

parameter	conditions/description	min	typ	max	units
operating temperature	see derating curve	-40		105	°C
storage temperature		-55		125	°C
storage humidity	non-condensing			95	%
temperature rise	at full load, Ta=25°C		25		°C

SOLDERABILITY

parameter	conditions/description	min	typ	max	units
hand soldering	1.5 mm from case for 10 seconds			300	°C
wave soldering	see wave soldering profile			260	°C

MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	32.00 x 20.00 x 10.80 (1.26 x 0.787 x 0.425 inch)				mm
case material	aluminum alloy				
weight			14		g

MECHANICAL DRAWING

units: mm[inch]



tolerance: $\pm 0.50[\pm 0.020]$

pin pitch tolerance: $\pm 0.25[\pm 0.010]$



pin diameter tolerance: $\pm 0.10[\pm 0.004]$

PIN CONNECTIONS		
PIN	Single Output	Dual Output
2, 3	GND	GND
9	No Pin	0V
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22, 23	Vin	Vin

NC: No Connection

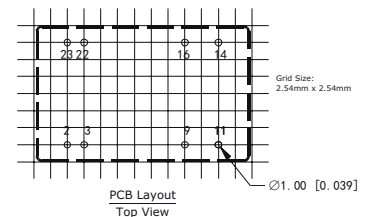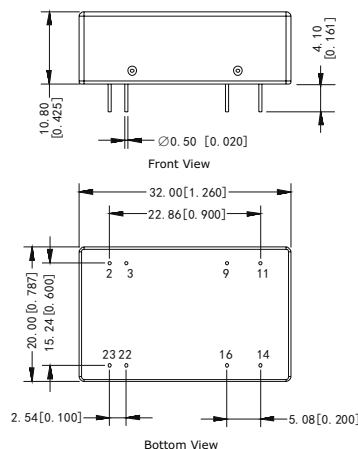

DERATING CURVES

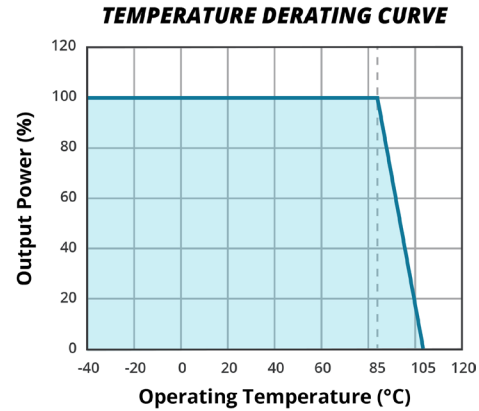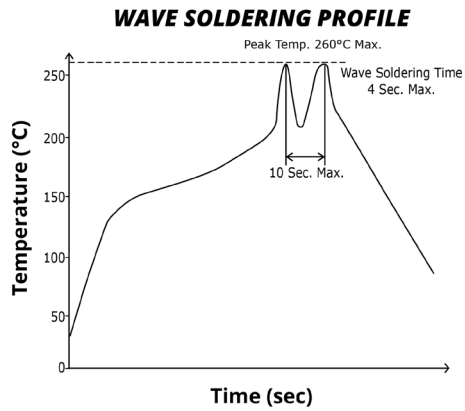

EMC RECOMMENDED CIRCUIT

Figure 1

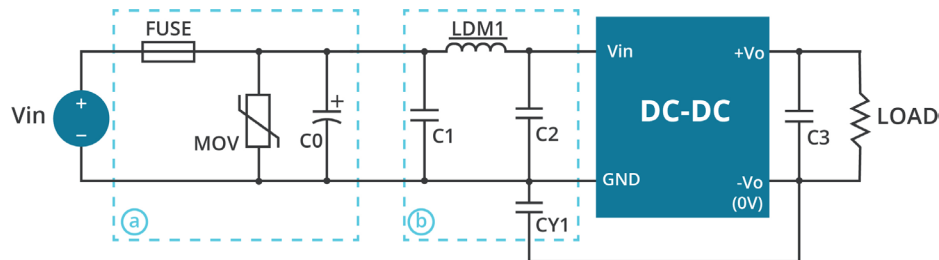


Table 1

Recommended external circuit components				
Vin (Vdc)	5	12	24	48
FUSE	choose according to practical input current			
MOV	--	S14K25	S14K35	S14K60
C0	1000μF	1000μF	330μF/50V	330μF/100V
C1	4.7μF/50V	4.7μF/50V	4.7μF/50V	4.7μF/100V
LDM1	12μH	12μH	12μH	12μH
C2	4.7μF/50V	4.7μF/50V	4.7μF/50V	4.7μF/100V
C3	10μF	10μF	10μF	10μF
CY1	1nF/2kV	1nF/2kV	1nF/2kV	1nF/2kV

APPLICATION NOTES

1. Output load requirement

To ensure this module can operate efficiently and reliably, the minimum output load may not be less than 5% of the full load during operation. If the actual output power is low, connect a resistor at the output end in parallel to increase the load.

2. Recommended circuit

This series has been tested according to the following recommended testing circuit before leaving the factory. This series should be tested under load (see Figure 2 & Table 2). If you want to further decrease the input/output ripple, you can increase the capacitance accordingly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be appropriate. If the capacitance is too high, a startup problem might arise. For every channel of the output, to ensure safe and reliable operation, the maximum capacitance must be less than the maximum capacitive load (see Table 3).

Figure 2

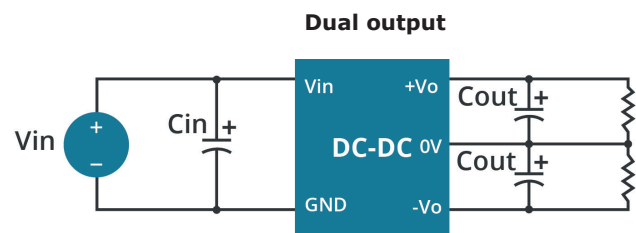
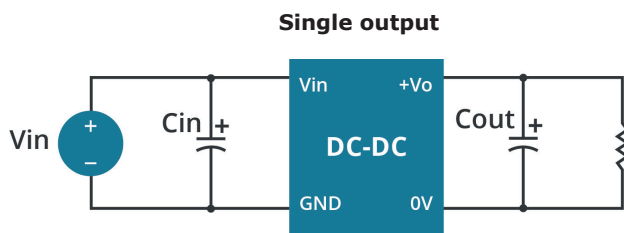


Table 2

Vin (Vdc)	Cin (μ F)	Cout (μ F)
5	100	10
12	100	10
24	10~47	10
48	10~47	10

Table 3

Single Vout (Vdc)	Max. Capacitive Load (μ F)	Dual Vout (Vdc)	Max. Capacitive Load ¹ (μ F)
3.3	4700	--	--
5	4700	5	2200
12	2700	9	2000
15	2200	12	1800
24	1800	15	1000

Note: 1. For each output.

3. Input Current

When it is used in an unregulated condition, make sure that the input fluctuations and ripple voltage do not exceed the module standard. Refer to Figure 3 and Table 4 for the startup current of this dc-dc module.

Figure 3




Table 4

Vin (Vdc)	Ip (mA)
5	1400
12	620
24	310
48	150

Note: 1. Minimum load shouldn't be less than 5%, otherwise ripple may increase dramatically. Operation under minimum load will not damage the converter, however, they may not meet all specifications listed.
2. Maximum capacitive load is tested at input voltage range and full load.
3. All specifications are measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.

REVISION HISTORY

rev.	description	date
1.0	initial release	03/19/2013
1.01	added models, added UL approval to model, updated datasheet	08/12/2015
1.02	safeties updated in features and safety approvals line	01/15/2021
1.03	derating curve and circuit figures updated	07/20/2021
1.04	CE certification updated for 5, 12 & 24V models	11/25/2022

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC
a bel group

Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CUI Inc.:](#)

[PUZ3-D12-S12-D](#) [PUZ3-D5-S12-D](#) [PUZ3-D12-S15-D](#) [PUZ3-D5-D12-D](#) [PUZ3-D5-D5-D](#) [PUZ3-D12-D5-D](#) [PUZ3-D12-S5-D](#) [PUZ3-D5-S15-D](#) [PUZ3-D5-S5-D](#) [PUZ3-D12-D15-D](#) [PUZ3-D5-D15-D](#) [PUZ3-D12-D12-D](#) [PUZ3-D24-D15-D](#) [PUZ3-D24-D5-D](#) [PUZ3-D24-S12-D](#) [PUZ3-D24-S15-D](#) [PUZ3-D24-S5-D](#) [PUZ3-D48-D12-D](#) [PUZ3-D48-D15-D](#) [PUZ3-D48-D5-D](#) [PUZ3-D48-S12-D](#) [PUZ3-D48-S15-D](#) [PUZ3-D48-S5-D](#) [PUZ3-D24-D12-D](#) [PUZ3-D12-S24-D](#) [PUZ3-D12-D9-D](#)