

## **HDSP-301x/303x Series**

## **HDSP-561x/563x Series**

### **10-mm and 13-mm Slim Font Seven-Segment Displays**

#### **Description**

The Broadcom® HDSP-301x/303x Series and HDSP-561x/563x Series slim font seven-segment displays incorporate a slim font character design. This slim font features narrow width, specially mitered segments to give a fuller appearance to the illuminated character. Faces of these displays are painted a neutral gray for enhanced on/off contrast.

All devices are available in either common anode or common cathode configuration with right hand decimal point.


#### **Features**

- Excellent appearance
- Slim font design
- Mitered corners, evenly illuminated segments
- Gray face for optimum on/off contrast
- Choice of colors: red, green, yellow, and deep red
- Choice of character size: 10 mm and 13 mm
- Characterized for luminous intensity

#### **Ordering Information**

Red	Green	Yellow	Deep Red	Description
HDSP-301E	HDSP-301G	HDSP-301Y	HDSP-301A	Common Anode, 10-mm Display
HDSP-303E	HDSP-303G	HDSP-303Y	HDSP-303A	Common Cathode, 10-mm Display
HDSP-561E	HDSP-561G	HDSP-561Y	HDSP-561A	Common Anode, 13-mm Display
HDSP-563E	HDSP-563G	HDSP-563Y	HDSP-563A	Common Cathode, 13-mm Display

Figure 1: HDSP-301x/303x Series

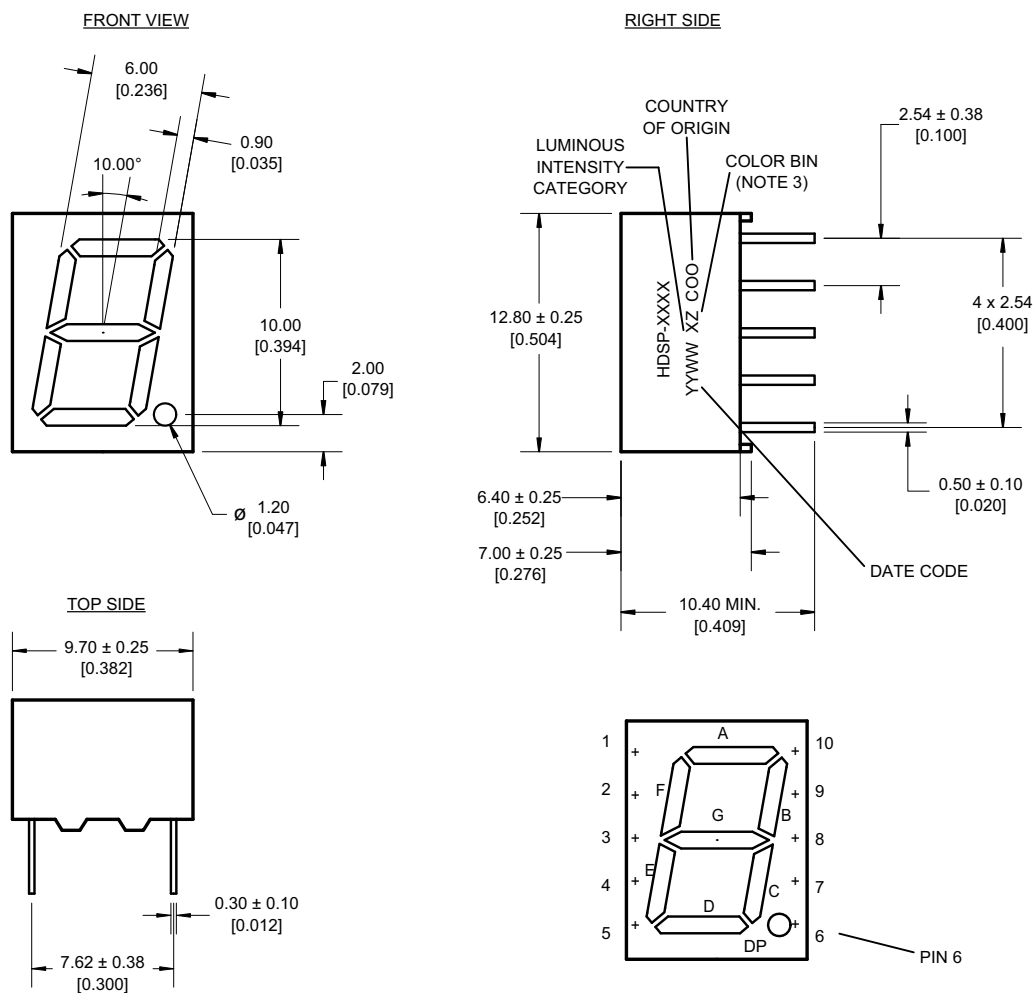


**NOTE:**

1. All dimensions are in millimeters (inches).
2. Tolerance is 0.25 mm (0.01 in.) unless otherwise stated.
3. For yellow and green devices only.

Pin	Function
1	G
2	F
3	Common A/C
4	E
5	D
6	DP
7	C
8	Common A/C
9	B
10	A

Figure 2: HDSP-561x/563x Series

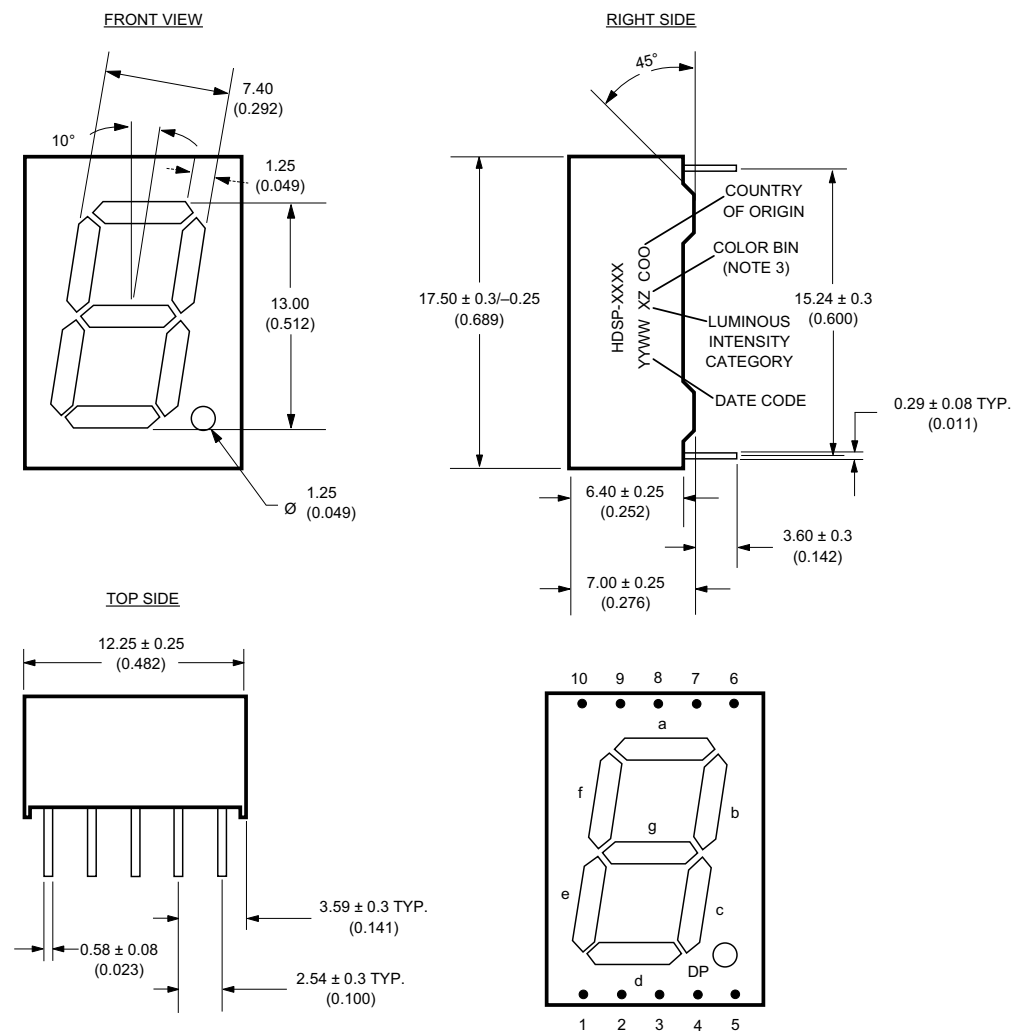

**NOTE:**

1. All dimensions are in millimeters (inches).
2. Tolerance is 0.25 mm (0.01 in.) unless otherwise stated.
3. For yellow and green devices only.

Pin	Function
1	E
2	D
3	Common A/C
4	C
5	DP
6	B
7	A
8	Common A/C
9	F
10	G

## Absolute Maximum Ratings

Description	Red	Green	Yellow	Deep Red	Unit
Power Dissipation per Segment or DP	62.5	62.5	50	52	mW
Peak Forward Current per Segment or DP <sup>a</sup>	90	90	60	60	mA
DC Forward Current per Segment or DP <sup>b</sup>	25	25	20	20	mA
Operating Temperature Range	–40 to +85	–40 to +85	–40 to +85	–40 to +85	°C
Storage Temperature Range	–40 to +85	–40 to +85	–40 to +85	–40 to +85	°C
Reverse Voltage per Segment or DP <sup>c</sup>	5				
Wave Soldering Temperature for 3 Seconds 1.59 mm Below Body	250	250	250	250	°C

a. Duty factor = 10%, frequency = 1 kHz,  $T_A = 25^\circ\text{C}$ .

b. Derate linearly as shown in [Figure 6](#) (red), [Figure 10](#) (green), [Figure 14](#) (deep red), and [Figure 18](#) (yellow).

c. Reverse voltage is for LED testing purposes and is not recommended to be used as an application condition.

## Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
<b>Red</b>						
<b>Device Series HDSP-301/303E</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	1.80	3.60	—	mcd	$I_F = 10\text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	1.95	2.50	V	$I_F = 20\text{ mA}$
Peak Wavelength	$\lambda_p$	—	633	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	622	—	nm	$I_F = 20\text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5\text{ V}$
<b>Red</b>						
<b>Device Series HDSP-561/563E</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	5.05	8.00	—	mcd	$I_F = 10\text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	1.95	2.50	V	$I_F = 20\text{ mA}$
Peak Wavelength	$\lambda_p$	—	633	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	622	—	nm	$I_F = 20\text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5\text{ V}$
<b>Green</b>						
<b>Device Series HDSP-301/303G</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	1.80	3.00	—	mcd	$I_F = 10\text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	2.10	2.50	V	$I_F = 20\text{ mA}$
Peak Wavelength	$\lambda_p$	—	572	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	570	—	nm	$I_F = 20\text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5\text{ V}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
<b>Green</b>						
<b>Device Series HDSP-561/563G</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	1.80	3.00	—	mcd	$I_F = 10 \text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	2.10	2.50	V	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_p$	—	572	—	nm	$I_F = 20 \text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	570	—	nm	$I_F = 20 \text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5\text{V}$
<b>Yellow</b>						
<b>Device Series HDSP-301/303Y</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	1.10	1.90	—	mcd	$I_F = 10 \text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	2.10	2.50	V	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_p$	—	592	—	nm	$I_F = 20 \text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	588	—	nm	$I_F = 20 \text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5\text{V}$
<b>Yellow</b>						
<b>Device Series HDSP-561/563Y</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	1.80	2.80	—	mcd	$I_F = 10 \text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	2.10	2.50	V	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_p$	—	592	—	nm	$I_F = 20 \text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	588	—	nm	$I_F = 20 \text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5\text{V}$
<b>Deep Red</b>						
<b>Device Series HDSP-301/303A</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	0.28	0.45	—	mcd	$I_F = 1 \text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	2.00	2.60	V	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_p$	—	660	—	nm	$I_F = 20 \text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	640	—	nm	$I_F = 20 \text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5 \text{ V}$
<b>Deep Red</b>						
<b>Device Series HDSP-561/563A</b>						
Luminous Intensity/Segment (Digit Average) <sup>a,b,c</sup>	$I_V$	0.28	0.45	—	mcd	$I_F = 1 \text{ mA}$
Forward Voltage/Segment <sup>d</sup>	$V_F$	—	2.00	2.60	V	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_p$	—	660	—	nm	$I_F = 20 \text{ mA}$
Dominant Wavelength <sup>e</sup>	$\lambda_d$	—	640	—	nm	$I_F = 20 \text{ mA}$
Reverse Current <sup>f</sup>	$I_R$	—	—	100	$\mu\text{A}$	$V_R = 5 \text{ V}$

- The luminous intensity,  $I_V$ , is measured at the mechanical axis of the package.
- The optical axis is closely aligned with the mechanical axis of the package.
- Tolerance is  $\pm 15\%$ .
- Forward voltage tolerance is  $\pm 0.1\text{V}$ .
- The dominant wavelength,  $\lambda_d$  is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
- Reverse voltage is for product testing only. Long-term reverse bias is not recommended for end application.

## Intensity Bin Limits (mcd)

### Red (HDSP-30xE)/Yellow (HDSP-56xY)

IV Bin Category	Min.	Max.
K	1.800	3.600
L	2.800	5.600
M	4.500	9.000

### Yellow (HDSP-30xY)

IV Bin Category	Min.	Max.
I	1.100	2.200
K	1.800	3.600
L	2.800	5.600

### Green (HDSP-30xG/HDSP-56xG)

IV Bin Category	Min.	Max.
K	1.800	3.600
L	2.800	5.600
M	4.500	9.000

### Deep Red (HDSP-30xA/HDSP-56xA)

IV Bin Category	Min.	Max.
F	0.280	0.560
G	0.450	0.900
H	0.700	1.400

### Red (HDSP-56xE)

IV Bin Category	Min.	Max.
M	5.050	8.000
N	8.001	12.650
O	12.651	20.000

Tolerance for each bin limit is  $\pm 15\%$ .

## Color Categories

Color	Bin	Dominant Wavelength (nm)	
		Min.	Max.
Green	3	570.00	574.50
	4	567.00	571.50
Yellow	2	586.50	590.00
	3	584.00	587.50

Red

Figure 3: Relative Intensity vs. Wavelength

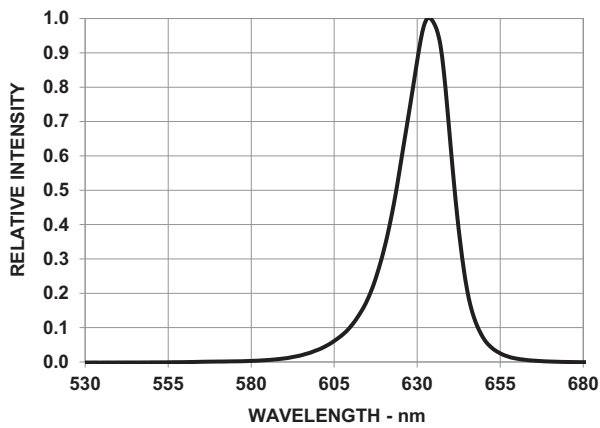


Figure 4: Forward Current vs. Forward Voltage

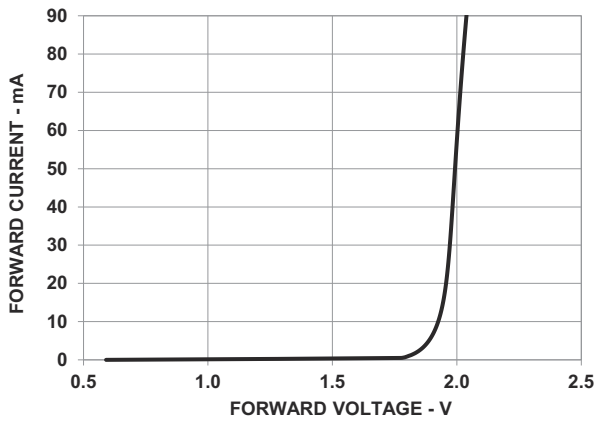


Figure 5: Relative Luminous Intensity vs. Forward Current


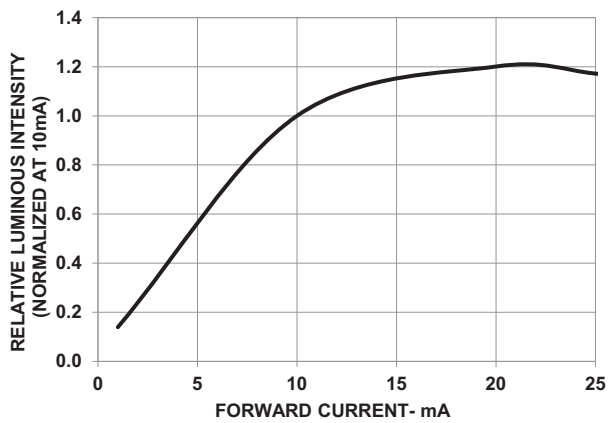


Figure 6: Maximum Forward Current vs. Ambient Temperature

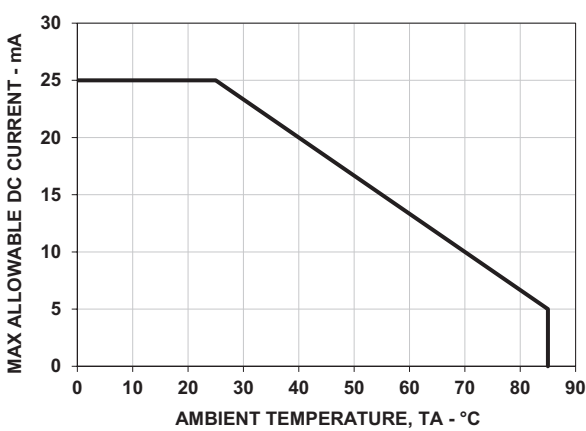

Green

Figure 7: Relative Intensity vs. Wavelength

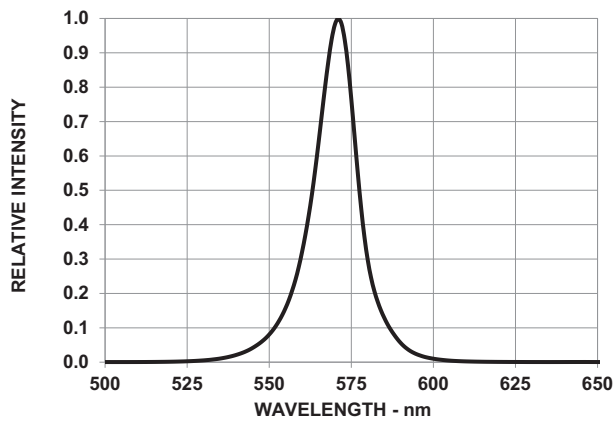


Figure 8: Forward Current vs. Forward Voltage

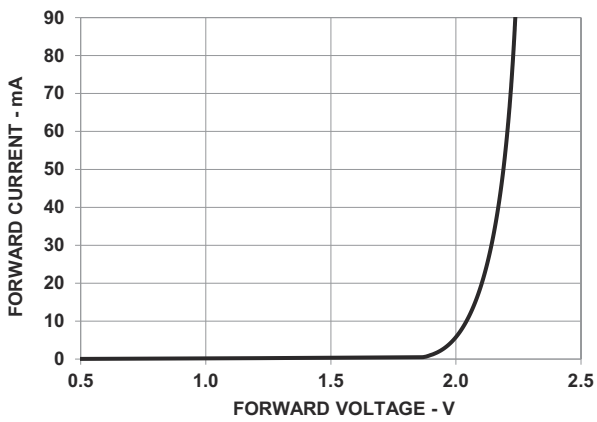


Figure 9: Relative Luminous Intensity vs. Forward Current


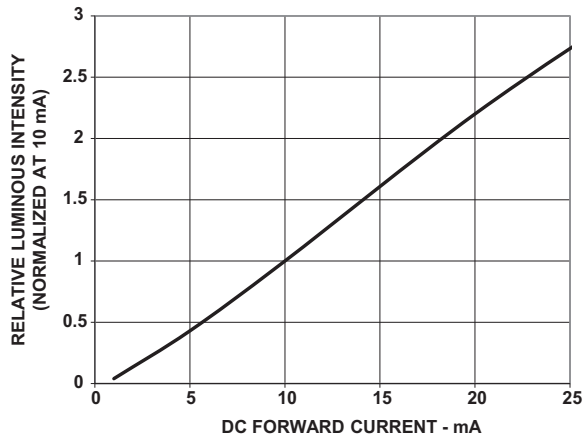


Figure 10: Maximum Forward Current vs. Ambient Temperature



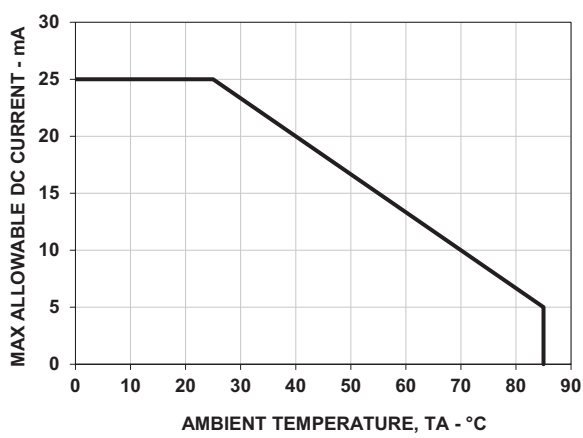

# Deep Red

Figure 11: Spectral Power Distribution

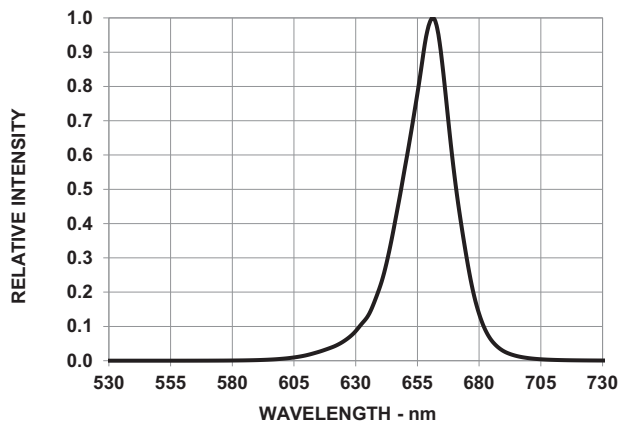


Figure 12: Forward Current vs. Forward Voltage

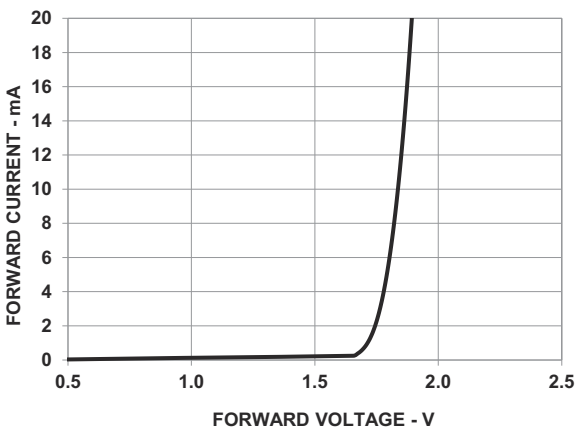


Figure 13: Relative Luminous Intensity vs. Forward Current


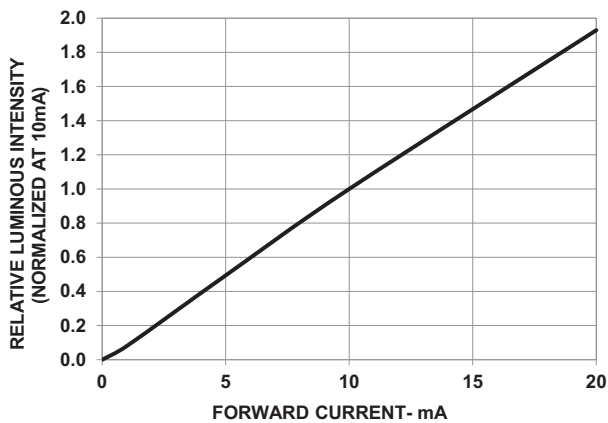


Figure 14: Maximum Forward Current vs. Ambient Temperature

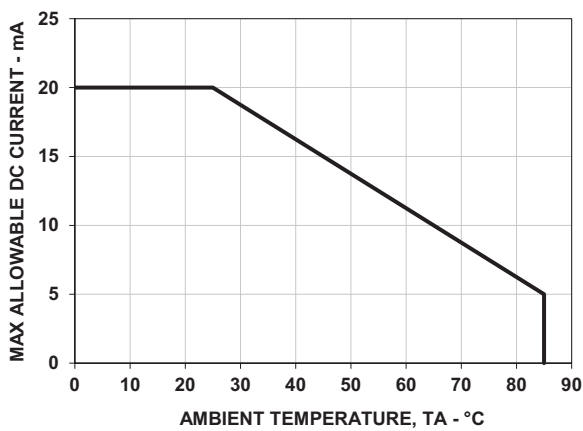

# Yellow

Figure 15: Relative Intensity vs. Wavelength

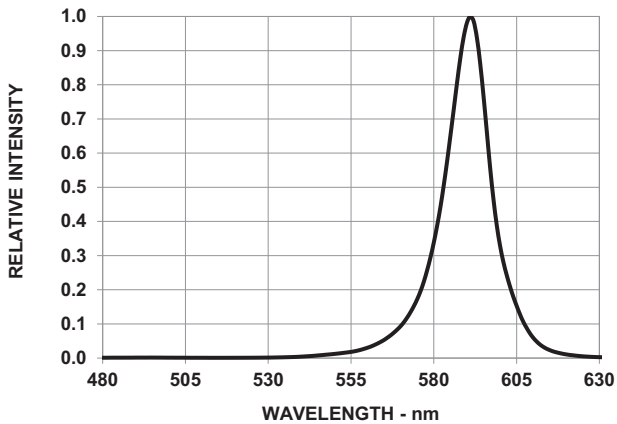


Figure 16: Forward Current vs. Forward Voltage

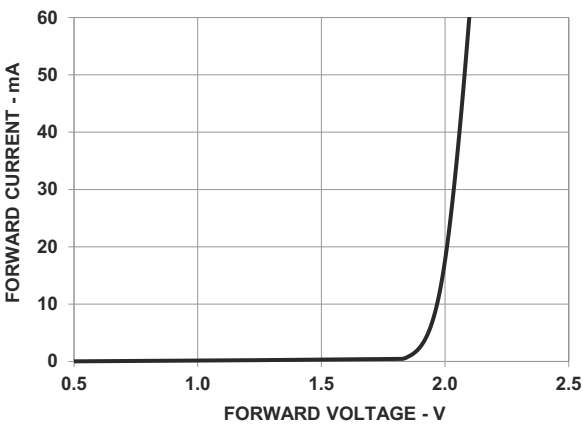


Figure 17: Relative Luminous Intensity vs. Forward Current


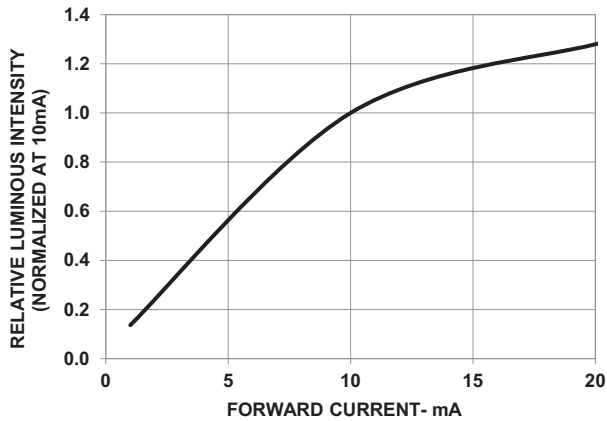


Figure 18: Maximum Forward Current vs. Ambient Temperature

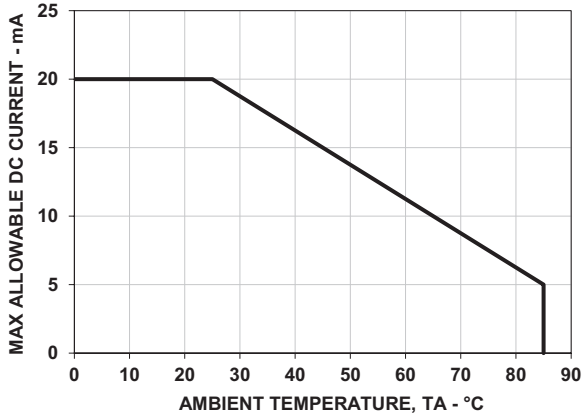

## Precautionary Notes


### Soldering and Handling Precautions

- Set and maintain the wave soldering parameters according to the recommended temperature and dwell time. Perform daily checks on the profile to ensure that it is always conforming to the recommended conditions. Exceeding these conditions will over-stress the LEDs and cause premature failures.
- Use only bottom preheaters to reduce thermal stress experienced by the LEDs.
- Recalibrate the soldering profile before loading a new type of a PCB. PCBs with different sizes and designs (component density) will have different heat capacities and might cause a change in temperature experienced by the PCB if the same wave soldering setting is used.
- Do not perform wave soldering more than once.
- Any alignment fixture used during wave soldering must be loosely fitted and must not apply stress on the LEDs. Use non-metal material because it will absorb less heat during the wave soldering process.
- At elevated temperatures, the LEDs are more susceptible to mechanical stress. Allow the PCB to be sufficiently cooled to room temperature before handling. Do not apply stress to the LED when it is hot.
- Use wave soldering to solder the LED. Use hand soldering only for rework or touch up if unavoidable, but it must be strictly controlled to following conditions:
  - Soldering iron tip temperature = 315°C maximum.
  - Soldering duration = 2 seconds maximum.
  - Number of cycle = 1 only.
  - Power of soldering iron = 50W maximum.
- For ESD-sensitive devices, apply proper ESD precautions at the soldering station. Use only an ESD-safe soldering iron.
- Do not touch the LED package body with the soldering iron except for the soldering terminals because it may cause damage to the LED.
- Confirm beforehand whether the functionality and performance of the LED is affected by soldering with hand soldering.
- Keep the heat source at least 1.6 mm away from the LED body during soldering.
- Design an appropriate hole size to avoid problems during insertion.
- Cleaning agents from the ketone family (acetone, methyl ethylketone, and so on) and from the chlorinated hydrocarbon family (methylene chloride, trichloroethylene, carbon tetrachloride, and so on) are

not recommended for cleaning the LED displays. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

- For the purpose of cleaning, wash with DI water only. The cleaning process should take place at room temperature only. Clear any water or moisture from the LED display immediately after washing.
- Use of *No clean* solder paste is recommended for soldering.

Figure 19: Recommended Wave Soldering Profile

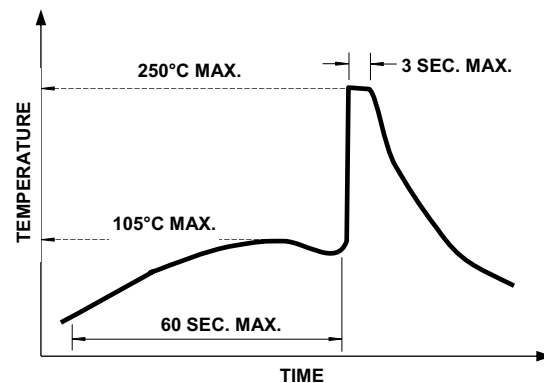

**NOTE:** Figure 19 refers to measurements with thermocouple mounted at the bottom of the PCB.

### Application Precautions

- The drive current of the LED must not exceed the maximum allowable limit across temperatures as stated in the data sheet. Constant current driving is recommended to ensure consistent performance.
- Circuit design must cater to the whole range of forward voltage ( $V_F$ ) of the LEDs to ensure the intended drive current can always be achieved.
- The LED exhibits slightly different characteristics at different drive currents, which may result in a larger variation of performance (such as intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.

- The LED is not intended for reverse bias. Use other appropriate components for such purposes. When driving the LED in matrix form, ensure that the reverse bias voltage does not exceed the allowable limit of the LED.
- Avoid rapid change in ambient temperatures, especially in high-humidity environments, because they cause condensation on the LED.
- If the LED is intended to be used in a harsh or outdoor environment, protect the LED against damages caused by rain, water, dust, oil, corrosive gases, external mechanical stresses, and so on.

## Eye Safety Precautions

LEDs may pose optical hazards when in operation. Do not look directly at operating LEDs because it might be harmful to the eyes. For safety reasons, use appropriate shielding or personal protective equipment.

## Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2005-2024 Broadcom. All Rights Reserved. The term "Broadcom" refers to Broadcom Inc. and/or its subsidiaries. For more information, go to [www.broadcom.com](http://www.broadcom.com). All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Lead (Pb) Free  
RoHS Compliant

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Broadcom Limited:](#)

[HDSP-301A](#) [HDSP-301E](#) [HDSP-301G](#) [HDSP-301Y](#) [HDSP-303A](#) [HDSP-303E](#) [HDSP-303G](#) [HDSP-303Y](#) [HDSP-](#)  
[561A](#) [HDSP-561E](#) [HDSP-561G](#) [HDSP-561Y](#) [HDSP-563A](#) [HDSP-563E](#) [HDSP-563G](#) [HDSP-563Y](#)