

HLMP-EDxx/ELxx

5 mm Precision Optical Performance

Best Value AlInGaP Lamps



Data Sheet



Description

These Precision Optical Performance AlInGaP and AlInGaP II LEDs provide superior light output for excellent readability in sunlight and are extremely reliable.

These LED lamps are untinted, nondiffused, T-1 $\frac{3}{4}$ packages incorporating second generation optics producing well defined spatial radiation patterns at specific viewing cone angles.

These lamps are made with an advanced optical grade epoxy, offering superior high temperature and high moisture resistance performance in outdoor signal and sign applications. The high maximum LED junction temperature limit of +130° C enables high temperature operation in bright sunlight conditions. The package epoxy contains both uv-a and uv-b inhibitors to reduce the effects of long term exposure to direct sunlight.

Benefits

- Viewing angles match traffic management sign and requirements
- Colors meet automotive and pedestrian signal and specifications
- Superior performance in outdoor environments
- Suitable for autoinsertion onto PC boards

Features

- Well defined spatial radiation pattern
- Viewing angles: 6°, 15°, 23°, 30°
- High luminous output
- Two red and amber intensity levels AlInGaP (bright) and AlInGaP II (brightest)
- Colors: 626/630 nm red, 590/592 nm amber
- Superior resistance to moisture
- UV resistant epoxy

Applications

- Traffic management:
 - Traffic signals
 - Work zone warning lights
 - Variable message signs
- Commercial outdoor advertising: signs, marquees
- Automotive: exterior and interior lights

Device Selection Guide for AlInGaP

Part Number	Typical Viewing Angle $2\theta_{1/2}$	Color and Dominant Wavelength (nm), Typ. ^[4]	Luminous Intensity I_v (mcd) ^{[2][3]} at $I_F = 20$ mA Min.	Leads with Standoffs	Package Drawing
HLMP-EG08-T0000	6°	Red 626	2170	No	A
HLMP-EG10-T0000	6°	Red 626	2170	Yes	B
HLMP-EG15-N0000	15°	Red 626	590	No	A
HLMP-EG17-N0000	15°	Red 626	590	Yes	B
HLMP-EG24-M0000	23°	Red 626	450	No	A
HLMP-EG26-M0000	23°	Red 626	450	Yes	B
HLMP-EG30-K0000	30°	Red 626	270	No	A
HLMP-EG32-K0000	30°	Red 626	270	Yes	B
HLMP-EL08-T0000	6°	Amber 590	2170	No	A
HLMP-EL10-T0000	6°	Amber 590	2170	Yes	B
HLMP-EL15-M0000	15°	Amber 590	450	No	A
HLMP-EL17-M0000	15°	Amber 590	450	Yes	B
HLMP-EL24-L0000	23°	Amber 590	345	No	A
HLMP-EL26-L0000	23°	Amber 590	345	Yes	B
HLMP-EL30-K0000	30°	Amber 590	270	No	A
HLMP-EL32-K0000	30°	Amber 590	270	Yes	B

Device Selection Guide for AlInGaP II

Part Number	Typical Viewing Angle $2\theta_{1/2}$	Color and Dominant Wavelength (nm), Typ. ^[4]	Luminous Intensity I_v (mcd) ^{[2][3]} at $I_F = 20$ mA Min.	Leads with Standoffs	Package Drawing
HLMP-ED16-S0000	15°	Red 630	1650	No	A
HLMP-ED16-S0T00	15°	Red 630	1650	No	A
HLMP-ED18-S0000	15°	Red 630	1650	Yes	B
HLMP-ED18-S0T00	15°	Red 630	1650	Yes	B
HLMP-ED25-R0000	23°	Red 630	1300	No	A
HLMP-ED25-R0T00	23°	Red 630	1300	No	A
HLMP-ED27-R0000	23°	Red 630	1300	Yes	B
HLMP-ED27-R0T00	23°	Red 630	1300	Yes	B
HLMP-ED31-Q0000	30°	Red 630	1000	No	A
HLMP-ED31-Q0T00	30°	Red 630	1000	No	A
HLMP-ED33-Q0000	30°	Red 630	1000	Yes	B
HLMP-ED33-Q0T00	30°	Red 630	1000	Yes	B
HLMP-EL16-S0000	15°	Amber 592	1650	No	A
HLMP-EL16-S0R00	15°	Amber 592	1650	No	A
HLMP-EL18-S0000	15°	Amber 592	1650	Yes	B
HLMP-EL18-S0R00	15°	Amber 592	1650	Yes	B
HLMP-EL25-Q0000	23°	Amber 592	1000	No	A
HLMP-EL25-Q0R00	23°	Amber 592	1000	No	A
HLMP-EL27-Q0000	23°	Amber 592	1000	Yes	B
HLMP-EL27-Q0R00	23°	Amber 592	1000	Yes	B
HLMP-EL31-P0000	30°	Amber 592	765	No	A
HLMP-EL31-P0R00	30°	Amber 592	765	No	A
HLMP-EL33-P0000	30°	Amber 592	765	Yes	B
HLMP-EL33-P0R00	30°	Amber 592	765	Yes	B
HLMP-EL31-Q0R00	30°	Amber 592	1000	No	A

Notes:

1. $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is $\frac{1}{2}$ the on-axis intensity.
2. The luminous intensity is measured on the mechanical axis of the lamp package.
3. The optical axis is closely aligned with the package mechanical axis.
4. The dominant wavelength, λ_d , is derived from the CIE Chromaticity Diagram and represents the color of the lamp.

Part Numbering System

HLMP- X X X X - X X X X

Mechanical Options

00 - Bulk Packaging
DD: Ammo Pack

Color Bin Selections

0: No color bin limitation
K: Color bins 2 and 4
4: Amber color bin 4 only
R: Amber color bins 1, 2, 4, and 6 with V_F max of 2.6 V
T: Red color with V_F max of 2.6 V

Max Intensity Bin

Min Intensity Bin

Viewing Angle And Lead Standoffs

08: 6 degree without lead standoffs; AlInGaP
10: 6 degree with lead standoffs; AlInGaP
15: 15 degree without lead standoffs; AlInGaP
16: 15 degree without lead standoffs; AlInGaP II
17: 15 degree with lead standoffs; AlInGaP
18: 15 degree with lead standoffs; AlInGaP II
24: 23 degree without lead standoffs; AlInGaP
25: 23 degree without lead standoffs; AlInGaP II
26: 23 degree with lead standoffs; AlInGaP
27: 23 degree with lead standoffs; AlInGaP II
30: 30 degree without lead standoffs; AlInGaP
31: 30 degree without lead standoffs; AlInGaP II
32: 30 degree with lead standoffs; AlInGaP
33: 30 degree with lead standoffs; AlInGaP II



Color

D: 630 nm Red
G: 626 nm Red
L: 590/592 nm Amber

Package

E: 5 mm Round AlInGaP

Package Dimensions

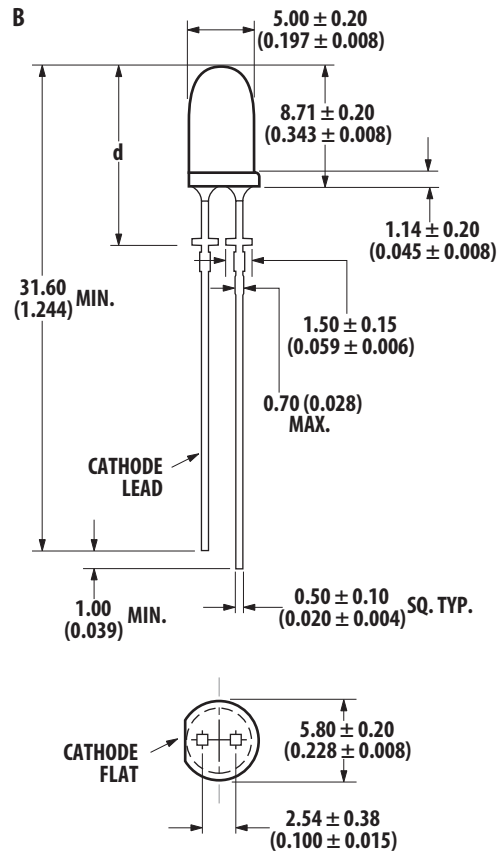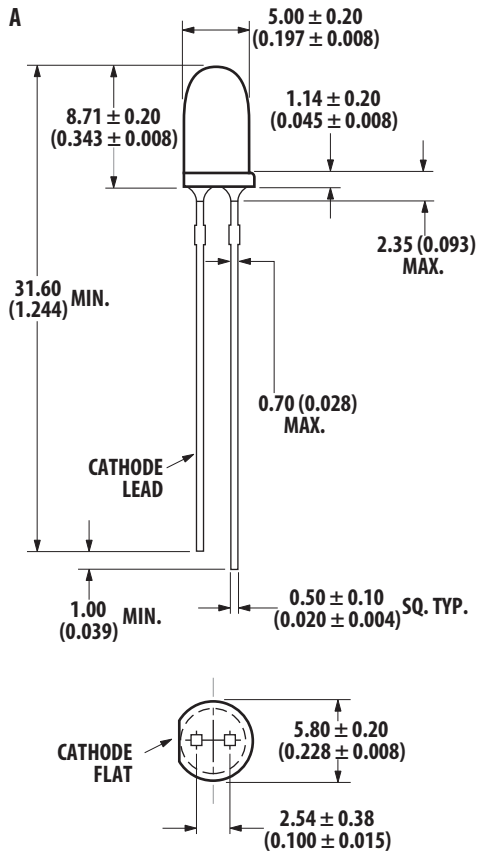

Notes:

1. All Dimensions are in millimeters (inches).
2. Leads are mild steel, solder dipped.
3. Tapers shown at top of leads (bottom of lamp package) indicate an epoxy meniscus that may extend about 1mm (0.040 in.) down the leads.
4. Recommended PC board hole diameters:
 - Lamp package A without standoffs: Flush mounting at base of lamp package = 1.143/1.067 (0.044/0.042).
 - Lamp package B with standoffs: Mounting at lead standoffs = 0.965/0.889(0.038/0.035).
5. For dome height above lead stand-off seating plane, d, lamp package B. See table.

Part Number	d
HLMP-xx10	12.37 ± 0.25 (0.487 ± 0.010)
HLMP-xx17	12.43 ± 0.25 (0.489 ± 0.010)
HLMP-xx26	12.52 ± 0.25 (0.493 ± 0.010)
HLMP-xx32	11.96 ± 0.25 (0.471 ± 0.010)
HLMP-xx18	12.60 ± 0.25 (0.496 ± 0.010)
HLMP-xx27	11.59 ± 0.25 (0.446 ± 0.010)
HLMP-xx33	11.99 ± 0.25 (0.472 ± 0.010)

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Value
DC Forward Current ^[1,2]	50 mA
Peak Pulsed Forward Current ^[2]	100 mA
Average Forward Current	30 mA
Reverse Voltage ($I_R = 100\ \mu\text{A}$)	5 V
Power Dissipation	120 mW
LED Junction Temperature	130° C
Operating Temperature	-40° C to +100° C
Storage Temperature	-40° C to +120° C
Dip/Drag Solder Temperature	260° C for 6 secs
Through-the-Wave Preheat Temperature	145° C
Through-the-Wave Solder Temperature	245° C for 3 secs

Notes:

1. Derate linearly as shown in Figure 4.
2. For long term performance with minimal light output degradation, drive currents between 10 mA and 30 mA are recommended. For more information, please refer to Application Brief I-024.

Electrical/Optical Characteristics Table $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Forward Voltage	V_F				V	$I_F = 20\text{ mA}$
Amber ($\lambda_d = 590\text{ nm}$)			2.02	2.5		
Red ($\lambda_d = 626\text{ nm}$)			1.90	2.5		
Amber ($\lambda_d = 592\text{ nm}$)			2.15	2.5 ^[1]		
Red ($\lambda_d = 630\text{ nm}$)			2.00	2.5 ^[1]		
Reverse Voltage	V_R	5	20		V	$I_R = 100\ \mu\text{A}$
Peak Wavelength	λ_{PEAK}				nm	Peak of Wavelength of Spectral Distribution at $I_F = 20\text{ mA}$
Amber ($\lambda_d = 590\text{ nm}$)						
Red ($\lambda_d = 626\text{ nm}$)						
Amber ($\lambda_d = 592\text{ nm}$)						
Red ($\lambda_d = 630\text{ nm}$)						
Spectral Halfwidth	$\Delta\lambda_{1/2}$		17		nm	Wavelength Width at Spectral Distribution 1/2 Power Point at $I_F = 20\text{ mA}$
Speed of Response	τ_s		20		ns	Exponential Time Constant, e^{-t/τ_s}
Capacitance	C		40		pF	$V_F = 0, f = 1\text{ MHz}$
Luminous Efficacy	η_v				lm/w	Emitted Luminous Power/Emitted Radiant Power at $I_F = 20\text{ mA}$
Amber ($\lambda_d = 590\text{ nm}$)			480			
Red ($\lambda_d = 626\text{ nm}$)			150			
Amber ($\lambda_d = 592\text{ nm}$)			500			
Red ($\lambda_d = 630\text{ nm}$)			155			
Thermal Resistance	$R\theta_{J-PIN}$		240		°C/W	LED Junction-to-Cathode Lead

Notes:

1. For options -xxRxx and -xxTxx, maximum forward voltage, V_F is 2.6 V.
2. $2\theta_{1/2}$ is the off-axis angle where the luminous intensity is 1/2 the on-axis intensity.
3. The radiant intensity, I_e in watts per steradian, may be found from the equation $I_e = I_v / \eta_v$ where I_v is the luminous intensity in candelas and η_v is the luminous efficacy in lumens/watt.

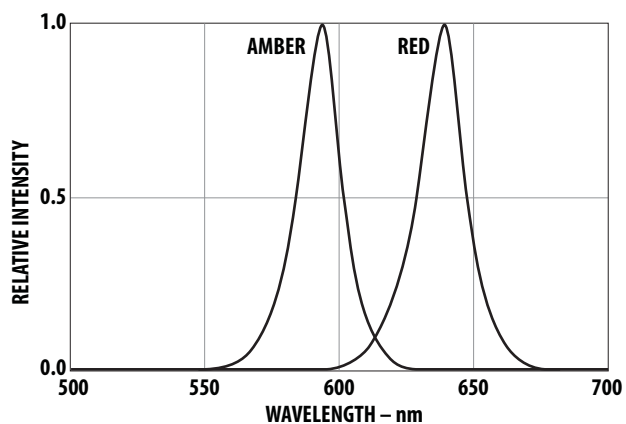


Figure 1. Relative intensity vs. wavelength.

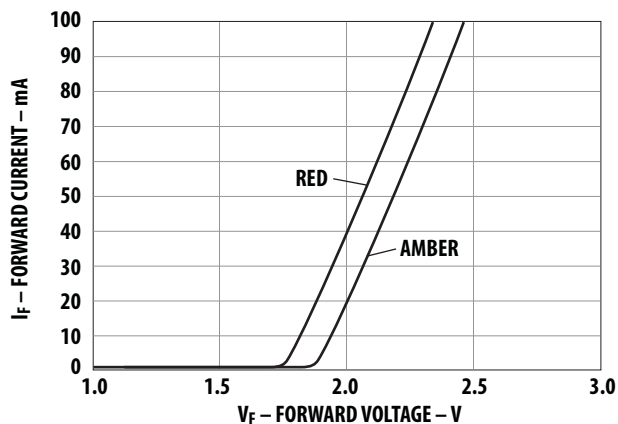


Figure 2. Forward current vs. forward voltage.

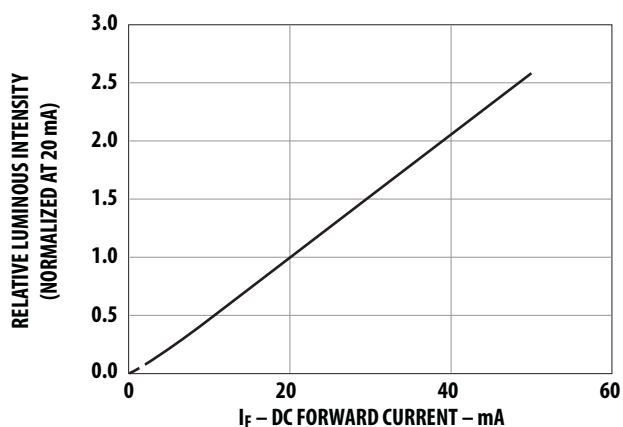


Figure 3. Relative luminous intensity vs. forward current.

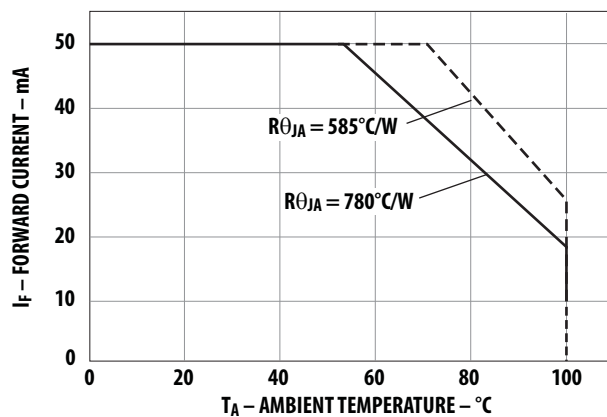


Figure 4. Maximum forward current vs. ambient temperature.

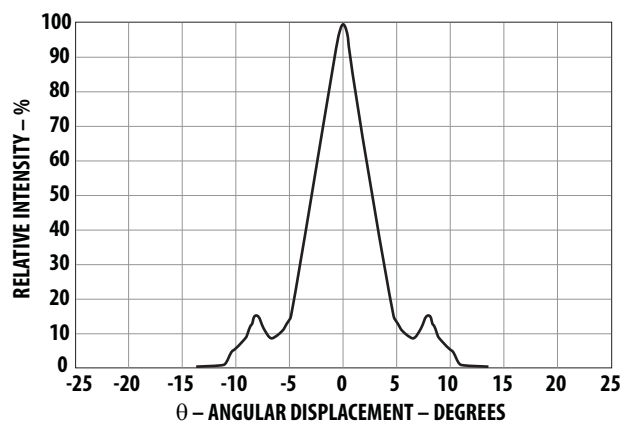


Figure 5. Representative spatial radiation pattern for 6° viewing angle lamps.

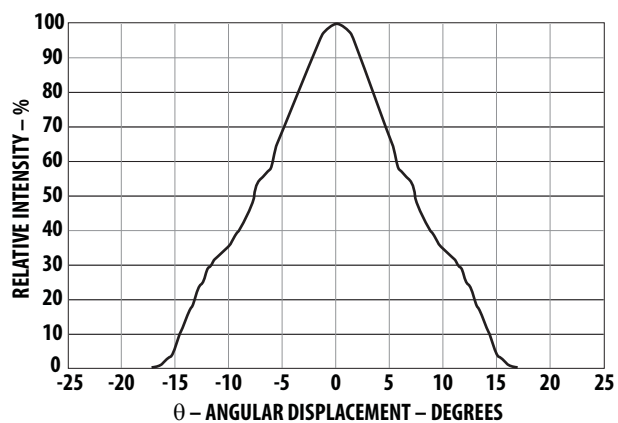


Figure 6. Representative spatial radiation pattern for 15° viewing angle lamps.

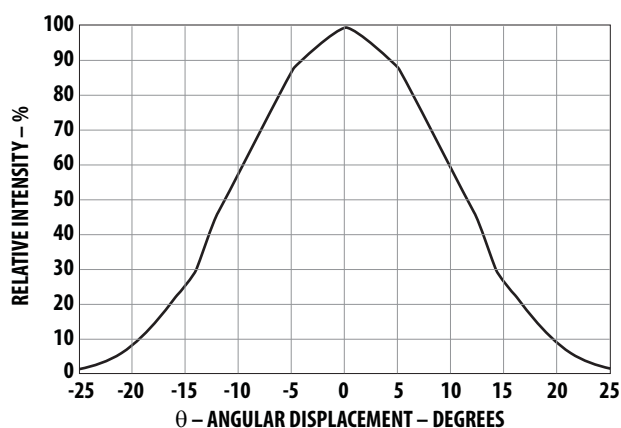


Figure 7. Representative spatial radiation pattern for 23° viewing angle lamps.

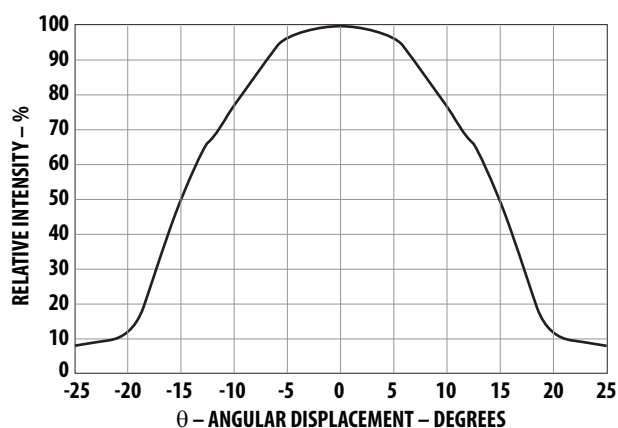


Figure 8. Representative spatial radiation pattern for 30° viewing angle lamps.

Intensity Bin Limits (mcd at 20 mA)

Bin ID	Min.	Max.
K	310	400
L	400	520
M	520	680
N	680	880
P	880	1150
Q	1150	1500
R	1500	1900
S	1900	2500
T	2500	3200
U	3200	4200
V	4200	5500

Tolerance for each bin limit is $\pm 15\%$.

Amber Color Bin Limits (nm at 20 mA)

Bin ID	Min.	Max.
1	584.5	587.0
2	587.0	589.5
4	589.5	592.0
6	592.0	594.5

Tolerance for each bin limit is ± 0.5 nm.

Note:

1. Bin categories are established for classification of products. Products may not be available in all bin categories. Please contact your local Avago representatives for further information.

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2012 Avago Technologies. All rights reserved. Obsoletes 5988-8249EN AV02-3644EN - June 20, 2012

Avago
TECHNOLOGIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Broadcom Limited:

[HLMP-ED18-UCT00](#) [HLMP-ED18-VX0DD](#) [HLMP-ED18-VYT00](#) [HLMP-ED18-WX000](#) [HLMP-ED18-WX0DD](#) [HLMP-ED18-WXT00](#) [HLMP-ED25-R0000](#) [HLMP-ED25-RU000](#) [HLMP-ED25-RUT00](#) [HLMP-ED25-SV000](#) [HLMP-ED25-SV0DD](#) [HLMP-ED25-TW000](#) [HLMP-ED25-TW0DD](#) [HLMP-ED25-TWT00](#) [HLMP-ED25-TWTDD](#) [HLMP-ED25-UX0DD](#) [HLMP-ED25-UCT00](#) [HLMP-ED25-UCTDD](#) [HLMP-ED25-VWTDD](#) [HLMP-ED25-VXTDD](#) [HLMP-ED27-SV000](#) [HLMP-ED27-SVTDD](#) [HLMP-ED27-TUTDD](#) [HLMP-ED27-TVTDD](#) [HLMP-ED27-TW000](#) [HLMP-ED27-TWT00](#) [HLMP-ED27-TWTDD](#) [HLMP-ED27-UWTDD](#) [HLMP-ED27-VXTDD](#) [HLMP-ED31-Q0000](#) [HLMP-ED31-Q0T00](#) [HLMP-ED31-QT000](#) [HLMP-ED31-QTT00](#) [HLMP-ED31-QTTDD](#) [HLMP-ED31-RU000](#) [HLMP-ED31-RUT00](#) [HLMP-ED31-ST000](#) [HLMP-ED31-ST0DD](#) [HLMP-ED31-SUT00](#) [HLMP-ED31-SUTDD](#) [HLMP-ED31-SV000](#) [HLMP-ED31-SV0DD](#) [HLMP-ED31-SVT00](#) [HLMP-ED31-SVT02](#) [HLMP-ED31-SVTDD](#) [HLMP-ED31-TV0DD](#) [HLMP-ED31-TVT00](#) [HLMP-ED31-TVTDD](#) [HLMP-ED31-UV0DD](#) [HLMP-ED31-UVT00](#) [HLMP-ED31-UVTDD](#) [HLMP-ED31-UWT00](#) [HLMP-ED31-UWTDD](#) [HLMP-ED33-Q0000](#) [HLMP-ED33-QT000](#) [HLMP-ED33-QT0ZZ](#) [HLMP-ED33-QTT00](#) [HLMP-ED33-RUT00](#) [HLMP-ED33-SV000](#) [HLMP-ED33-SV0DD](#) [HLMP-ED33-SV0ZZ](#) [HLMP-ED33-SVT00](#) [HLMP-ED33-SVTDD](#) [HLMP-ED33-SVTZZ](#) [HLMP-ED33-TUTDD](#) [HLMP-ED33-TVT00](#) [HLMP-ED33-TW000](#) [HLMP-ED33-TW0DD](#) [HLMP-ED33-UWT00](#) [HLMP-ED33-UWTDD](#) [HLMP-ED80-K0T00](#) [HLMP-ED80-KNT00](#) [HLMP-ED80-MQT00](#) [HLMP-ED80-NRT00](#) [HLMP-EL16-S0000](#) [HLMP-EL16-TW000](#) [HLMP-EL16-TW0DD](#) [HLMP-EL16-UX000](#) [HLMP-EL16-UX0DD](#) [HLMP-EL16-UXR00](#) [HLMP-EL16-VW0DD](#) [HLMP-EL16-VX0DD](#) [HLMP-EL16-VX400](#) [HLMP-EL16-VY000](#) [HLMP-EL16-VY0DD](#) [HLMP-EL16-VYKDD](#) [HLMP-EL16-VYR00](#) [HLMP-EL16-VYS00](#) [HLMP-EL16-VYSDD](#) [HLMP-EL16-WZ0DD](#) [HLMP-EL16-WZR00](#) [HLMP-EL16-WZRDD](#) [HLMP-EL16-X1RDD](#) [HLMP-EL17-M0000](#) [HLMP-EL17-PS000](#) [HLMP-EL17-QTKDD](#) [HLMP-EL17-SV000](#) [HLMP-EL17-TW000](#) [HLMP-EL17-UX000](#) [HLMP-EL17-VWKDD](#)