

CDMSJ22010-650

N-CHANNEL
SUPER JUNCTION MOSFET
10 AMP, 650 VOLT



TO-220FP CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CDMSJ22010-650 is a high current, 650 Volt N-Channel power MOSFET designed for high voltage, fast switching applications such as Power Factor Correction (PFC), and power chargers. This MOSFET combines high voltage capability with low $r_{DS(ON)}$, low threshold voltage and low gate charge.

**MARKING: CDMSJ
10-650**

APPLICATIONS:

- Power Factor Correction
- TV Power
- UPS
- PD Charger
- Adapter

FEATURES:

- High voltage capability ($V_{DS}=650V$)
- Low gate charge ($Q_{gs}=4nC$)
- Low $r_{DS(ON)}$ (0.39Ω)

MAXIMUM RATINGS: ($T_C=25^\circ C$)

Drain-Source Voltage

Gate-Source Voltage

Continuous Drain Current

Continuous Drain Current ($T_C=100^\circ C$)

Pulsed Drain Current

Diode Forward Current

Power Dissipation

Power Dissipation ($T_C=100^\circ C$)

Operating and Storage Junction Temperature

SYMBOL

V_{DS}

V_{GS}

I_D

I_D

I_{DM}

I_S

P_D

P_D

T_J, T_{stg}

650

30

10

6.2

22

10

29.5

12

-55 to +150

UNITS

V

V

A

A

A

A

W

W

$^\circ C$

ELECTRICAL CHARACTERISTICS: ($T_J=25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	650	730		V
$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2	3.0	4	V
$R_{DS(on)}$	$V_{GS}=10V, I_D=5.0A$ (Note 1)		340	390	$m\Omega$
I_{DSS}	$V_{DS}=650V, V_{GS}=0V$			1.0	μA
I_{GSS}	$V_{GS}=30V, V_{DS}=0V$			100	nA
I_{GSSR}	$V_{GS}=30V, V_{DS}=0V$			100	nA
gfs	$V_{DS}=20V, I_D=11A$		10		S
Q_g	$V_{DS}=520V, I_D=11A, V_{GS}=10V$		19		nC
Q_{gs}	$V_{DS}=520V, I_D=11A, V_{GS}=10V$		4		nC

CDMSJ22010-650

**N-CHANNEL
SUPER JUNCTION MOSFET
10 AMP, 650 VOLT**



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Q_{gd}	$V_{DS}=520\text{V}$, $I_D=11\text{A}$, $V_{GS}=10\text{V}$		8		nC
C_{iss}	$V_{DS}=400\text{V}$, $V_{GS}=0\text{V}$, $f=250\text{kHz}$		726		pF
C_{oss}	$V_{DS}=400\text{V}$, $V_{GS}=0\text{V}$, $f=250\text{kHz}$		29		pF
C_{rss}	$V_{DS}=400\text{V}$, $V_{GS}=0\text{V}$, $f=250\text{kHz}$		8		pF
$C_{o(er)}$	$V_{DS}=0\text{V}$ to 400V , $V_{GS}=0\text{V}$, $f=250\text{kHz}$		37		pF
$t_{d(on)}$	$V_{DD}=325\text{V}$, $I_D=11\text{A}$, $V_{GS}=10\text{V}$, $R_G=25\Omega$		30		ns
t_r	$V_{DD}=325\text{V}$, $I_D=11\text{A}$, $V_{GS}=10\text{V}$, $R_G=25\Omega$		50		ns
$t_{d(off)}$	$V_{DD}=325\text{V}$, $I_D=11\text{A}$, $V_{GS}=10\text{V}$, $R_G=25\Omega$		87		ns
t_f	$V_{DD}=325\text{V}$, $I_D=11\text{A}$, $V_{GS}=10\text{V}$, $R_G=25\Omega$		42		ns
R_g	$f=1.0\text{MHz}$		6.8		Ω
V_{SD}	$I_S=10\text{A}$, $V_{GS}=0\text{V}$		0.89	1.5	V
Q_{rr}	$I_S=11\text{A}$, $di/dt=100\text{A}/\mu\text{s}$		3.3		μC
t_{rr}	$I_S=11\text{A}$, $di/dt=100\text{A}/\mu\text{s}$		291		ns


Note 1: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

CDMSJ22010-650

**N-CHANNEL
SUPER JUNCTION MOSFET
10 AMP, 650 VOLT**



TO-220FP CASE - MECHANICAL OUTLINE

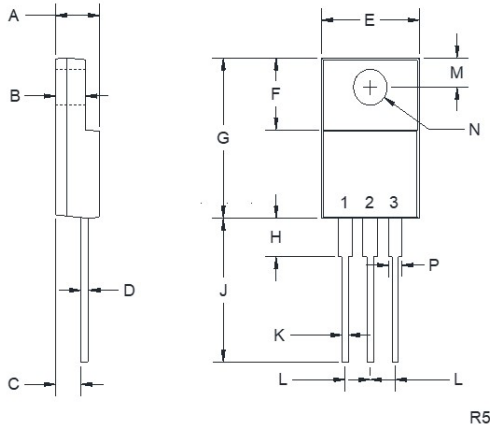

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.165	0.202	4.20	5.12
B	0.090	0.130	2.30	3.30
C	0.098	0.122	2.50	3.10
D	-	0.031	-	0.80
E	0.382	0.418	9.70	10.63
F	0.238	0.276	6.06	7.00
G	0.583	0.640	14.80	16.25
H	-	0.177	-	4.50
J	0.503	0.543	12.78	13.80
K	0.020	0.035	0.50	0.90
L	0.100		2.54	
M	0.100	0.140	2.55	3.55
N (DIA)	0.116	0.134	2.95	3.40
P	0.039	0.058	1.00	1.47


TO-220FP (REV: R5)

LEAD CODE:

- 1) Gate
- 2) Drain
- 3) Source

**MARKING CODE: CDMSJ
10-650**

PIN CONFIGURATION




CDMSJ22010-650

N-CHANNEL
SUPER JUNCTION MOSFET
10 AMP, 650 VOLT




TYPICAL ELECTRICAL CHARACTERISTICS


Typical Output Characteristics

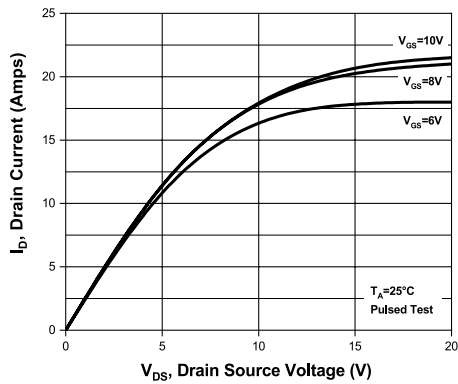


Drain Source On Resistance

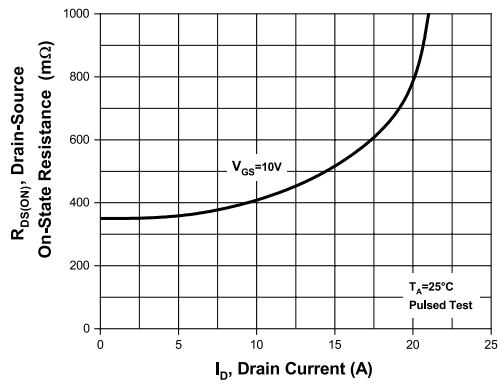

Transfer Characteristics

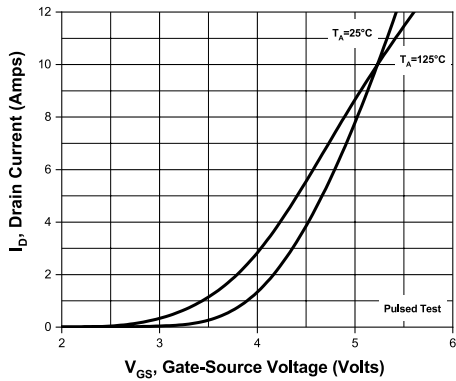

Drain Source Temperature Coefficient



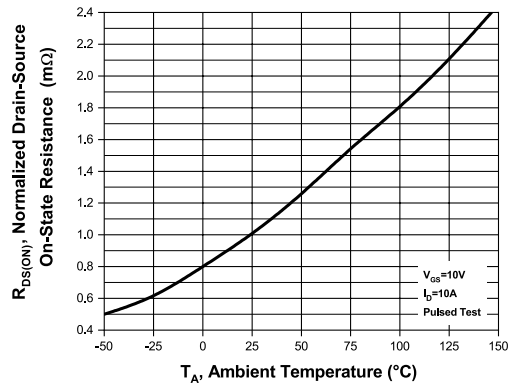


CDMSJ22010-650

N-CHANNEL
SUPER JUNCTION MOSFET
10 AMP, 650 VOLT



TYPICAL ELECTRICAL CHARACTERISTICS

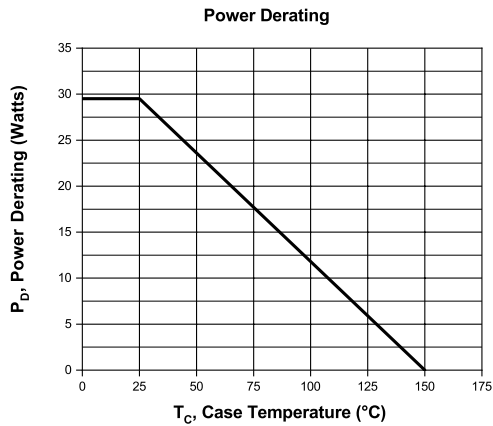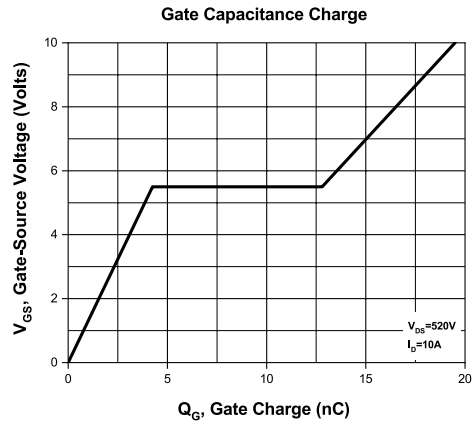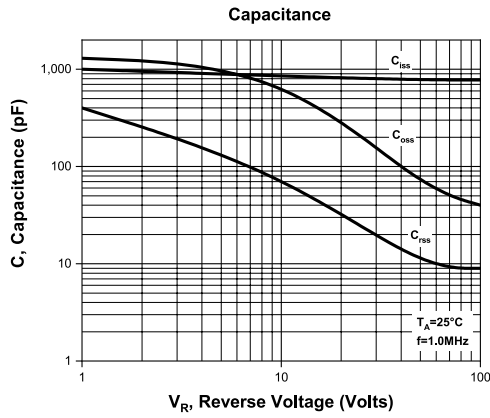

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Central Semiconductor:](#)

[CDMSJ22010-650 SL](#)