

CMR1F-02M CMR1F-08M  
CMR1F-04M CMR1F-10M  
CMR1F-06M

**SURFACE MOUNT SILICON  
FAST RECOVERY RECTIFIERS  
1.0 AMP, 200 THRU 1000 VOLT**



**SMA CASE**



[www.centrasemi.com](http://www.centrasemi.com)

#### DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMR1F-02M series 1.0 Amp surface mount silicon rectifier is a well constructed, highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications where small size is required. The SMA case occupies 30% less board space than the SMB case.

**MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE**

#### FEATURES:

- High reliability
- Glass passivated chip
- Special selections available

#### MAXIMUM RATINGS: ( $T_A=25^\circ\text{C}$ unless otherwise noted)

	SYMBOL	-02M	-04M	-06M	-08M	-10M	UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	200	400	600	800	1000	V
DC Blocking Voltage	$V_R$	200	400	600	800	1000	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	280	420	560	700	V
Average Forward Current ( $T_L=120^\circ\text{C}$ )	$I_O$			1.0			A
Peak Forward Surge Current, $t_p=8.3\text{ms}$	$I_{FSM}$			30			A
Operating and Storage							
Junction Temperature	$T_J, T_{stg}$			-65 to +150			$^\circ\text{C}$
Thermal Resistance	$\theta_{JL}$			30			$^\circ\text{C/W}$

#### ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ\text{C}$ unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$I_R$	$V_R=\text{Rated } V_{RRM}$		5.0	$\mu\text{A}$
$I_R$	$V_R=\text{Rated } V_{RRM}, T_A=125^\circ\text{C}$		200	$\mu\text{A}$
$V_F$	$I_F=1.0\text{A}$		1.3	V
$C_J$	$V_R=0, f=1.0\text{MHz}$		35	pF
$t_{rr}$	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$ (CMR1F-02M, -04M)		150	ns
$t_{rr}$	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$ (CMR1F-06M)		250	ns
$t_{rr}$	$I_F=0.5\text{A}, I_R=1.0\text{A}, I_{rr}=0.25\text{A}$ (CMR1F-08M, -10M)		500	ns

CMR1F-02M    CMR1F-08M  
 CMR1F-04M    CMR1F-10M  
 CMR1F-06M



**SURFACE MOUNT SILICON  
 FAST RECOVERY RECTIFIERS  
 1.0 AMP, 200 THRU 1000 VOLT**

**SMA CASE - MECHANICAL OUTLINE**

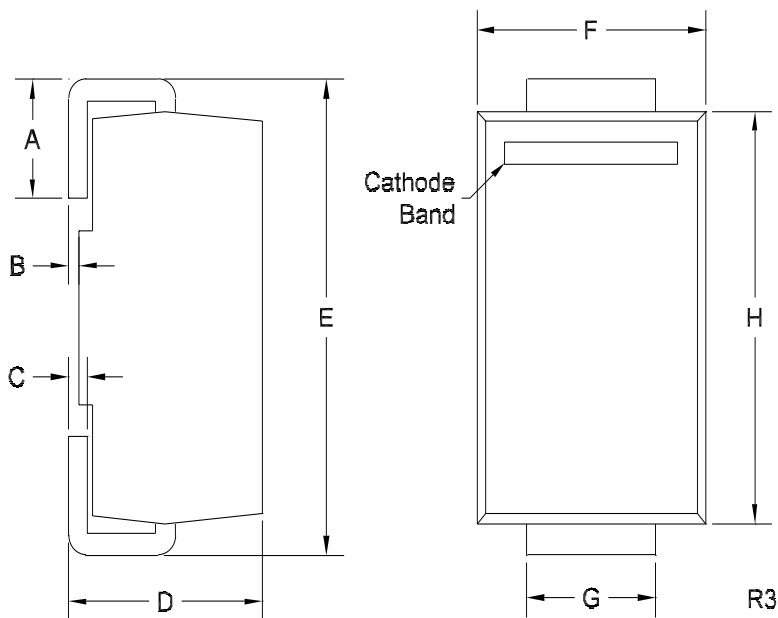

DEVICE	MARKING CODE
CMR1F-02M	CF02M
CMR1F-04M	CF04M
CMR1F-06M	CF06M
CMR1F-08M	CF08M
CMR1F-10M	CF10M

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.030	0.060	0.76	1.52
B	0.002	0.008	0.05	0.20
C	0.006	0.012	0.15	0.30
D	0.078	0.103	1.98	2.62
E	0.188	0.220	4.78	5.59
F	0.090	0.115	2.29	2.92
G	0.050	0.070	1.27	1.78
H	0.157	0.181	3.99	4.60





SMA (REV:R3)

CMR1F-02M CMR1F-08M  
CMR1F-04M CMR1F-10M  
CMR1F-06M

**SURFACE MOUNT SILICON  
FAST RECOVERY RECTIFIERS  
1.0 AMP, 200 THRU 1000 VOLT**



## TYPICAL ELECTRICAL CHARACTERISTICS

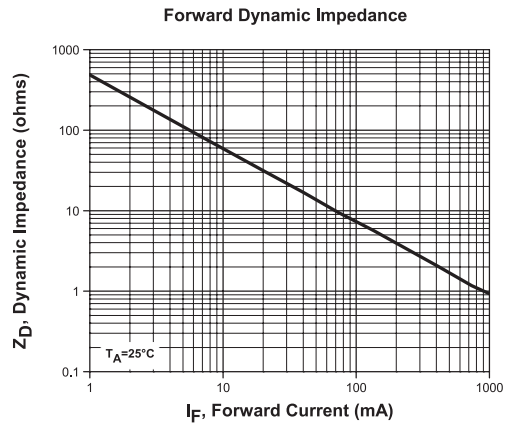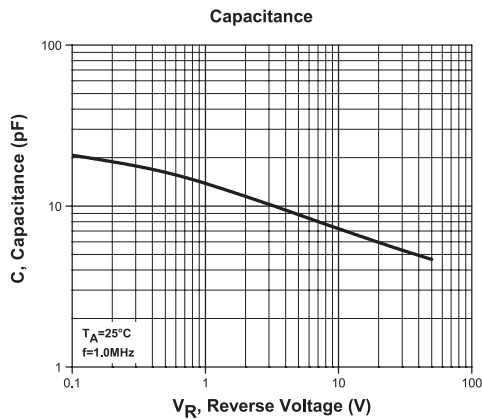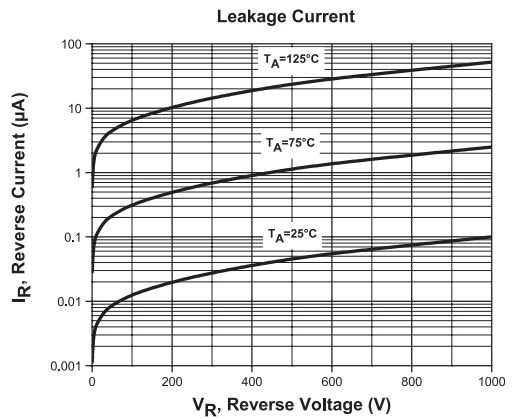
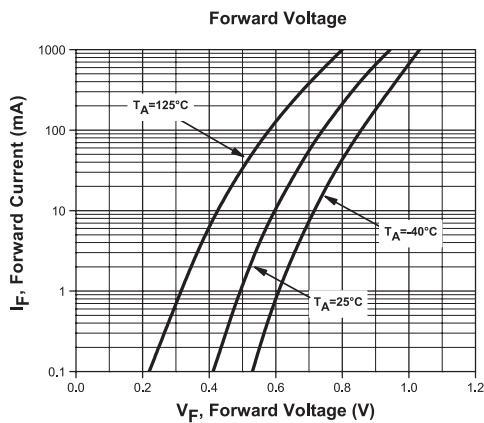


CMR1F-02M    CMR1F-08M  
CMR1F-04M    CMR1F-10M  
CMR1F-06M

**SURFACE MOUNT SILICON  
FAST RECOVERY RECTIFIERS  
1.0 AMP, 200 THRU 1000 VOLT**



## TYPICAL ELECTRICAL CHARACTERISTICS

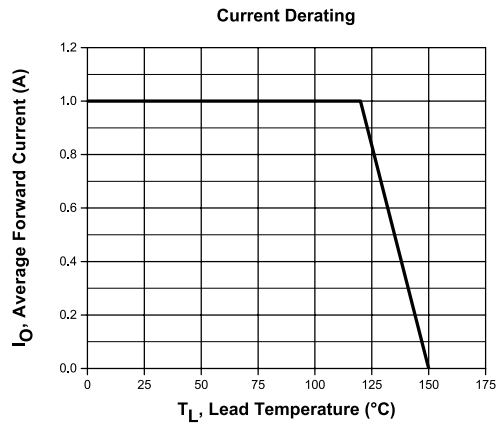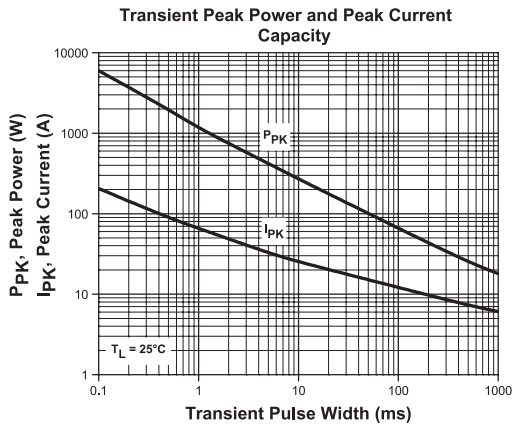

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Central Semiconductor:

[CMR1F-02M BK PBFREE](#) [CMR1F-02M TR13 PBFREE](#) [CMR1F-04M BK PBFREE](#) [CMR1F-04M TR13 PBFREE](#)  
[CMR1F-06M BK PBFREE](#) [CMR1F-06M TR13 PBFREE](#) [CMR1F-10M BK PBFREE](#) [CMR1F-10M TR13 PBFREE](#)