

CMSZ5221B THRU CMSZ5267B

**SURFACE MOUNT
SILICON ZENER DIODE
275mW, 2.4 THRU 75 VOLTS
5% TOLERANCE**

SUPERmini™**SOT-323 CASE**• Device is **Halogen Free** by design**MAXIMUM RATINGS:** ($T_A=25^\circ\text{C}$)

Power Dissipation

Operating and Storage Junction Temperature

Thermal Resistance

SYMBOL P_D T_J, T_{stg} Θ_{JA}

275

-65 to +150

455

UNITS

mW

 $^\circ\text{C}$ $^\circ\text{C/W}$ **DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMSZ5221B series silicon Zener diode is a high quality voltage regulator for use in industrial, commercial, entertainment and computer applications.

MARKING CODE: SEE MARKING CODES ON ELECTRICAL CHARACTERISTICS TABLE**ELECTRICAL CHARACTERISTICS:** ($T_A=25^\circ\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE			TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE $Z_{ZT} @ I_{ZT}$	MAXIMUM ZENER IMPEDANCE		MAXIMUM REVERSE CURRENT		MAXIMUM TEMPERATURE COEFFICIENT ΘV_Z	MARKING CODE
	$V_Z @ I_{ZT}$					$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$			
	MIN V	NOM V	MAX V			mA	Ω	Ω	mA	μA	
CMSZ5221B	2.280	2.4	2.520	20	30	1200	0.25	100	1.0	-0.085	8A1
CMSZ5222B	2.375	2.5	2.625	20	30	1250	0.25	100	1.0	-0.085	8B1
CMSZ5223B	2.565	2.7	2.835	20	30	1300	0.25	75	1.0	-0.080	8C1
CMSZ5224B	2.660	2.8	2.940	20	30	1400	0.25	75	1.0	-0.080	8D1
CMSZ5225B	2.850	3.0	3.150	20	29	1600	0.25	50	1.0	-0.075	8E1
CMSZ5226B	3.135	3.3	3.465	20	28	1600	0.25	25	1.0	-0.070	8AC
CMSZ5227B	3.420	3.6	3.780	20	24	1700	0.25	15	1.0	-0.065	8BC
CMSZ5228B	3.705	3.9	4.095	20	23	1900	0.25	10	1.0	-0.060	8CC
CMSZ5229B	4.085	4.3	4.515	20	22	2000	0.25	5.0	1.0	±0.055	8DC
CMSZ5230B	4.465	4.7	4.935	20	19	1900	0.25	5.0	2.0	±0.030	8EC
CMSZ5231B	4.845	5.1	5.335	20	17	1600	0.25	5.0	2.0	±0.030	8FC
CMSZ5232B	5.320	5.6	5.880	20	11	1600	0.25	5.0	3.0	+0.038	8GC
CMSZ5233B	5.700	6.0	6.300	20	7.0	1600	0.25	5.0	3.5	+0.038	8HC
CMSZ5234B	5.890	6.2	6.510	20	7.0	1000	0.25	3.0	4.0	+0.045	8JC
CMSZ5235B	6.460	6.8	7.140	20	5.0	750	0.25	3.0	5.0	+0.050	8KC
CMSZ5236B	7.125	7.5	7.875	20	6.0	500	0.25	3.0	6.0	+0.058	8LC
CMSZ5237B	7.790	8.2	8.610	20	8.0	500	0.25	3.0	6.5	+0.062	8MC
CMSZ5238B	8.265	8.7	9.135	20	8.0	600	0.25	3.0	6.5	+0.065	8NC
CMSZ5239B	8.645	9.1	9.555	20	10	600	0.25	3.0	7.0	+0.068	8PC
CMSZ5240B	9.500	10	10.50	20	17	600	0.25	3.0	8.0	+0.075	8QC
CMSZ5241B	10.45	11	11.55	20	22	600	0.25	2.0	8.4	+0.076	8RC
CMSZ5242B	11.40	12	12.60	20	30	600	0.25	1.0	9.1	+0.077	8SC
CMSZ5243B	12.35	13	13.65	9.5	13	600	0.25	0.5	9.9	+0.079	8TC
CMSZ5244B	13.30	14	14.70	9.0	15	600	0.25	0.1	10	+0.082	8UC

R5 (12-December 2012)



www.centrasemi.com

CMSZ5221B THRU CMSZ5267B


**SURFACE MOUNT
SILICON ZENER DIODE
275mW, 2.4 THRU 75 VOLTS
5% TOLERANCE**



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^\circ\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)


TYPE	ZENER VOLTAGE			TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM ZENER IMPEDANCE		MAXIMUM REVERSE CURRENT		MAXIMUM TEMPERATURE COEFFICIENT	MARKING CODE
	V _Z @ I _{ZT}					I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _R @ V _R		
	MIN V	NOM V	MAX V			mA	Ω	Ω	mA		
CMSZ5245B	14.25	15	15.75	8.5	16	600	0.25	0.1	11	+0.082	8VC
CMSZ5246B	15.20	16	16.80	7.8	17	600	0.25	0.1	12	+0.083	8WC
CMSZ5247B	16.15	17	17.85	7.4	19	600	0.25	0.1	13	+0.084	8XC
CMSZ5248B	17.10	18	18.90	7.0	21	600	0.25	0.1	14	+0.085	8YC
CMSZ5249B	18.05	19	19.95	6.6	23	600	0.25	0.1	14	+0.086	8ZC
CMSZ5250B	19	20	21	6.2	25	600	0.25	0.1	15	+0.086	1A8
CMSZ5251B	20.90	22	23.10	5.6	29	600	0.25	0.1	17	+0.087	1B8
CMSZ5252B	22.80	24	25.20	5.2	33	600	0.25	0.1	18	+0.088	1C8
CMSZ5253B	23.75	25	26.25	5.0	35	600	0.25	0.1	19	+0.089	1D8
CMSZ5254B	25.65	27	28.35	4.6	41	600	0.25	0.1	21	+0.090	1E8
CMSZ5255B	26.60	28	29.40	4.5	44	600	0.25	0.1	21	+0.091	1F8
CMSZ5256B	28.50	30	31.50	4.2	49	600	0.25	0.1	23	+0.091	1G8
CMSZ5257B	31.35	33	34.65	3.8	58	700	0.25	0.1	25	+0.092	1H8
CMSZ5258B	34.20	36	37.80	3.4	70	700	0.25	0.1	27	+0.093	1J8
CMSZ5259B	37.05	39	40.95	3.2	80	800	0.25	0.1	30	+0.094	1K8
CMSZ5260B	40.85	43	45.15	3.0	93	900	0.25	0.1	33	+0.095	1L8
CMSZ5261B	44.65	47	49.35	2.7	105	1000	0.25	0.1	36	+0.095	1M8
CMSZ5262B	48.45	51	53.55	2.5	125	1100	0.25	0.1	39	+0.096	1N8
CMSZ5263B	53.20	56	58.80	2.2	150	1300	0.25	0.1	43	+0.096	1P8
CMSZ5264B	57.00	60	63.00	2.1	170	1400	0.25	0.1	46	+0.097	1R8
CMSZ5265B	58.90	62	65.10	2.0	185	1400	0.25	0.1	47	+0.097	1S8
CMSZ5266B	64.60	68	71.40	1.8	230	1600	0.25	0.1	52	+0.097	1T8
CMSZ5267B	71.25	75	78.75	1.7	270	1700	0.25	0.1	56	+0.098	1U8

SOT-323 CASE - MECHANICAL OUTLINE

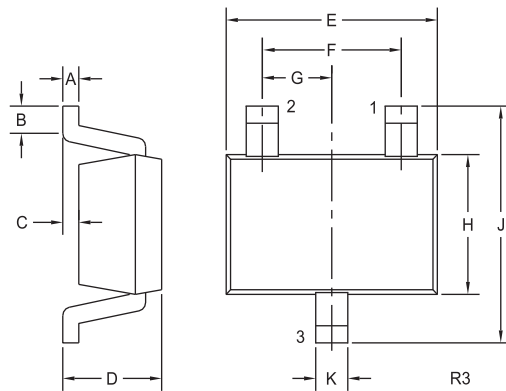

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.002	0.008	0.05	0.20
B	0.004	-	0.10	-
C	-	0.004	-	0.10
D	0.031	0.043	0.80	1.10
E	0.071	0.087	1.80	2.20
F	0.051		1.30	
G	0.026		0.65	
H	0.045	0.053	1.15	1.35
J	0.079	0.087	2.00	2.20
K	0.008	0.016	0.20	0.40

SOT-323 (REV: R3)



LEAD CODE:

- 1) Anode
- 2) No Connection
- 3) Cathode

R5 (12-December 2012)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

<u>CMSZ5257B</u>	<u>CMSZ5251B</u>	<u>CMSZ5255B</u>	<u>CMSZ5259B</u>	<u>CMSZ5253B</u>	<u>CMSZ5252B</u>	<u>CMSZ5256B</u>	<u>CMSZ5261B</u>
<u>CMSZ5238B</u>	<u>CMSZ5254B</u>	<u>CMSZ5236B</u>	<u>CMSZ5230B</u>	<u>CMSZ5250B</u>	<u>CMSZ5258B</u>	<u>CMSZ5223B</u>	<u>CMSZ5229B</u>
<u>CMSZ5227B</u>	<u>CMSZ5247B</u>	<u>CMSZ5249B</u>	<u>CMSZ5245B</u>	<u>CMSZ5243B</u>	<u>CMSZ5244B</u>	<u>CMSZ5241B</u>	<u>CMSZ5237B</u>
<u>CMSZ5235B</u>	<u>CMSZ5232B</u>	<u>CMSZ5233B</u>	<u>CMSZ5242B</u>	<u>CMSZ5248B</u>	<u>CMSZ5246B</u>	<u>CMSZ5225B</u>	<u>CMSZ5222B</u>
<u>CMSZ5226B</u>	<u>CMSZ5260B</u>	<u>CMSZ5221B</u>	<u>CMSZ5224B</u>	<u>CMSZ5228B</u>	<u>CMSZ5231B</u>	<u>CMSZ5239B</u>	<u>CMSZ5240B</u>
<u>CMSZ5234B</u>	<u>CMSZ5261B TR</u>	<u>CMSZ5234B TR</u>	<u>CMSZ5240B TR</u>	<u>CMSZ5222B TR</u>	<u>CMSZ5235B TR</u>	<u>CMSZ5245B TR</u>	
<u>CMSZ5258B TR</u>	<u>CMSZ5236B TR</u>	<u>CMSZ5231B TR</u>	<u>CMSZ5250B TR</u>	<u>CMSZ5254B TR</u>	<u>CMSZ5237B BK</u>		
<u>CMSZ5243B BK</u>	<u>CMSZ5239B BK</u>	<u>CMSZ5251B BK</u>	<u>CMSZ5245B BK</u>	<u>CMSZ5248B BK</u>	<u>CMSZ5254B BK</u>		
<u>CMSZ5252B BK</u>	<u>CMSZ5246B BK</u>	<u>CMSZ5240B BK</u>	<u>CMSZ5253B BK</u>	<u>CMSZ5236B BK</u>	<u>CMSZ5242B BK</u>		
<u>CMSZ5244B BK</u>	<u>CMSZ5250B BK</u>	<u>CMSZ5238B BK</u>	<u>CMSZ5257B BK</u>	<u>CMSZ5235B BK</u>	<u>CMSZ5241B BK</u>		
<u>CMSZ5258B BK</u>	<u>CMSZ5256B BK</u>	<u>CMSZ5255B BK</u>	<u>CMSZ5249B BK</u>	<u>CMSZ5261B BK</u>	<u>CMSZ5247B BK</u>		
<u>CMSZ5221B TR</u>	<u>CMSZ5242B TR</u>	<u>CMSZ5249B TR</u>	<u>CMSZ5237B TR</u>	<u>CMSZ5256B TR</u>	<u>CMSZ5224B TR</u>		
<u>CMSZ5246B TR</u>	<u>CMSZ5251B TR</u>	<u>CMSZ5247B TR</u>	<u>CMSZ5255B TR</u>	<u>CMSZ5227B TR</u>	<u>CMSZ5225B TR</u>		
<u>CMSZ5238B TR</u>	<u>CMSZ5252B TR</u>	<u>CMSZ5260B TR</u>	<u>CMSZ5229B TR</u>	<u>CMSZ5248B TR</u>	<u>CMSZ5239B TR</u>		
<u>CMSZ5241B TR</u>	<u>CMSZ5253B TR</u>	<u>CMSZ5232B TR</u>	<u>CMSZ5233B TR</u>	<u>CMSZ5243B TR</u>			