

BRX44      BRX47  
BRX45      BRX48  
BRX46      BRX49

**SILICON CONTROLLED RECTIFIER**  
**0.8 AMP, 30 THRU 400 VOLTS**



**TO-92 CASE**

**Central**<sup>TM</sup>  
**Semiconductor Corp.**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BRX44 series types are PNP Silicon Controlled Rectifiers manufactured in a TO-92 case, designed for control systems and sensing circuit applications.

**MARKING CODE: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

|                                                             | SYMBOL                           | BRX44 | BRX45 | BRX46       | BRX47 | BRX48 | BRX49 | UNITS                |
|-------------------------------------------------------------|----------------------------------|-------|-------|-------------|-------|-------|-------|----------------------|
| Peak Repetitive Off-State Voltage                           | $V_{\text{DRM}}, V_{\text{RRM}}$ | 30    | 60    | 100         | 200   | 300   | 400   | V                    |
| RMS On-State Current ( $T_C=40^{\circ}\text{C}$ )           | $I_{\text{T(RMS)}}$              |       |       | 0.8         |       |       |       | A                    |
| Average On-State Current ( $T_C=40^{\circ}\text{C}$ )       | $I_{\text{T(AV)}}$               |       |       | 0.5         |       |       |       | A                    |
| Nonrept. On-State Current ( $T_C=60^{\circ}\text{C}$ )      | $I_{\text{TSM}}$                 |       |       | 10          |       |       |       | A                    |
| Fusing Current ( $t=10\text{ms}$ )                          | $I^2t$                           |       |       | 0.24        |       |       |       | A <sup>2</sup> s     |
| Peak Reverse Gate Voltage ( $I_{\text{GR}}=10\mu\text{A}$ ) | $V_{\text{GRM}}$                 |       |       | 8.0         |       |       |       | V                    |
| Peak Gate Current ( $t=10\mu\text{s}$ )                     | $I_{\text{GM}}$                  |       |       | 1.0         |       |       |       | A                    |
| Peak Gate Dissipation ( $t=10\mu\text{s}$ )                 | $P_{\text{GM}}$                  |       |       | 2.0         |       |       |       | W                    |
| Gate Dissipation ( $t=20\text{ms}$ )                        | $P_{\text{G (AV)}}$              |       |       | 0.1         |       |       |       | W                    |
| Operating and Storage                                       |                                  |       |       |             |       |       |       |                      |
| Junction Temperature                                        | $T_{\text{J}}, T_{\text{stg}}$   |       |       | -40 to +125 |       |       |       | $^{\circ}\text{C}$   |
| Thermal Resistance                                          | $\theta_{\text{JC}}$             |       |       | 100         |       |       |       | $^{\circ}\text{C/W}$ |
| Thermal Resistance                                          | $\theta_{\text{JA}}$             |       |       | 200         |       |       |       | $^{\circ}\text{C/W}$ |


**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

| SYMBOL                           | TEST CONDITIONS                                                                                             | MIN | MAX | UNITS            |
|----------------------------------|-------------------------------------------------------------------------------------------------------------|-----|-----|------------------|
| $I_{\text{DRM}}, I_{\text{RRM}}$ | Rated $V_{\text{DRM}}, V_{\text{RRM}}, R_{\text{GK}}=1.0\text{K}\Omega, T_C=25^{\circ}\text{C}$             |     | 1.0 | $\mu\text{A}$    |
| $I_{\text{DRM}}, I_{\text{RRM}}$ | Rated $V_{\text{DRM}}, V_{\text{RRM}}, R_{\text{GK}}=1.0\text{K}\Omega, T_C=125^{\circ}\text{C}$            |     | 0.1 | mA               |
| $V_{\text{TM}}$                  | $I_{\text{T}}=1.0\text{A}$                                                                                  |     | 1.7 | V                |
| $I_{\text{GT}}$                  | $V_{\text{D}}=6.0\text{V}, R_{\text{L}}=10\Omega$                                                           |     | 200 | $\mu\text{A}$    |
| $V_{\text{GT}}$                  | $V_{\text{D}}=6.0\text{V}, R_{\text{L}}=10\Omega$                                                           |     | 0.8 | V                |
| $I_{\text{H}}$                   | $R_{\text{GK}}=1.0\text{K}\Omega$                                                                           |     | 5.0 | mA               |
| $I_{\text{L}}$                   | $R_{\text{GK}}=1.0\text{K}\Omega$                                                                           |     | 6.0 | mA               |
| dv/dt                            | $V_{\text{D}}=0.67\text{V} \times V_{\text{DRM}}, R_{\text{GK}}=1.0\text{K}\Omega, T_C=125^{\circ}\text{C}$ | 100 |     | V/ $\mu\text{s}$ |
| di/dt                            | $I_{\text{G}}=10\text{mA}, di_{\text{G}}/dt=0.1\text{A}/\mu\text{s}, T_C=125^{\circ}\text{C}$               | 30  |     | A/ $\mu\text{s}$ |

R0 (27-April 2004)

**SILICON CONTROLLED RECTIFIER**  
**0.8 AMP, 30 THRU 400 VOLTS**

**TO-92 CASE - MECHANICAL OUTLINE**

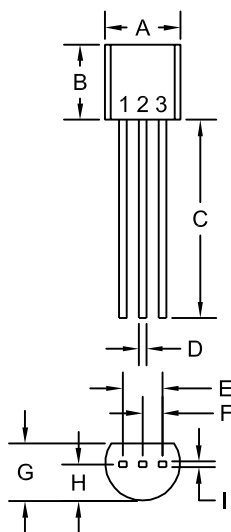

R1

**LEAD CODE:**

- 1) ANODE
- 2) GATE
- 3) CATHODE

**MARKING CODE:**  
**FULL PART NUMBER**

| SYMBOL  | DIMENSIONS |       |             |      |
|---------|------------|-------|-------------|------|
|         | INCHES     |       | MILLIMETERS |      |
|         | MIN        | MAX   | MIN         | MAX  |
| A (DIA) | 0.175      | 0.205 | 4.45        | 5.21 |
| B       | 0.170      | 0.210 | 4.32        | 5.33 |
| C       | 0.500      | -     | 12.70       | -    |
| D       | 0.016      | 0.022 | 0.41        | 0.56 |
| E       | 0.100      |       | 2.54        |      |
| F       | 0.050      |       | 1.27        |      |
| G       | 0.125      | 0.165 | 3.18        | 4.19 |
| H       | 0.080      | 0.105 | 2.03        | 2.67 |
| I       | 0.015      |       | 0.38        |      |

TO-92 (REV: R1)

R0 (27-April 2004)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[BRX44](#) [BRX45 TIN/LEAD](#) [BRX46 TIN/LEAD](#) [BRX44 TIN/LEAD](#) [BRX47 TIN/LEAD](#)