


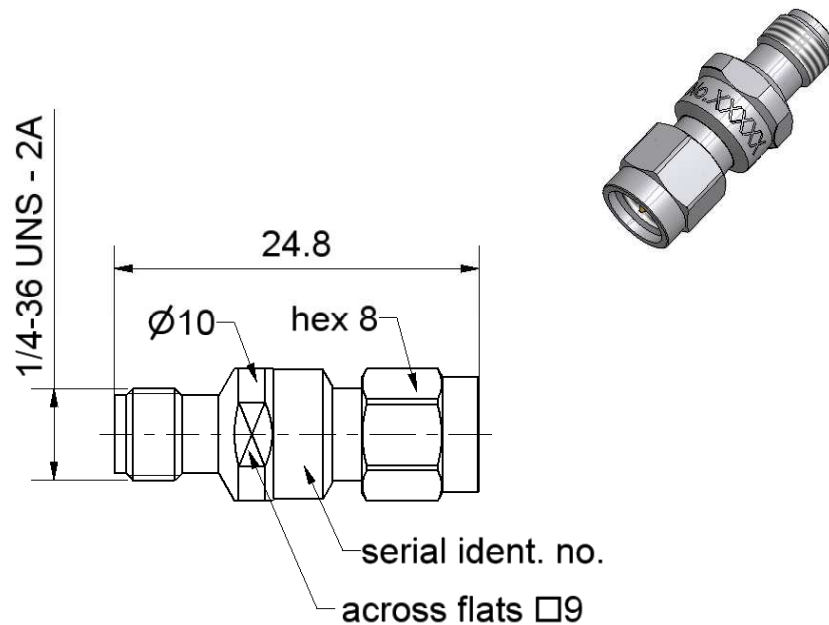

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-35
RPC-3.50 and SMA

Documents

N/A

Material and plating

Connector parts

Center conductor - plug
Center conductor - jack
Outer conductor
Coupling nut
Dielectric
Substrate

Material

CuBe
CuBe
Stainless steel
Stainless steel
PEEK
Al₂O₃

Plating

Gold, min. 1.27 µm, over nickel
Gold, min. 1.27 µm, over nickel
Passivated
Passivated

Dieses Dokument ist urheberrechtlich geschützt • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09.14/6.2

Technical Data Sheet				Rosenberger			
RPC-2.92		Attenuator Plug/Jack		02AS102-K20S3			
Electrical data Impedance50 Ω Frequency rangeDC to 40 GHz Return loss≥ 26.4 dB, DC to 4 GHz ≥ 19.1 dB, 4 GHz to 40 GHz Attenuation20 dB, ± 0.3 dB, DC to 4 GHz 20 dB ± 0.5 dB, 4 GHz to 40 GHz Power handling0.5 W at 25 °C Mechanical data Mating cycles≥ 500 Maximum torque1.70 Nm Recommended torque0.90 Nm Gauge0.00 mm to 0.08 mm Environmental data Operating temperature range¹0 °C to +50 °C Storage temperature range-40 °C to +85 °C RoHScompliant ¹ Temperature range over which these specifications are valid. Packing Standard1 pce in box Weight7.5 g/pce							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Kerstin Herzog	08.03.07	Markus Müller	17.11.15	e00	15-1421	Marion Striegler	17.11.15
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[02AS102-K20S3](#)