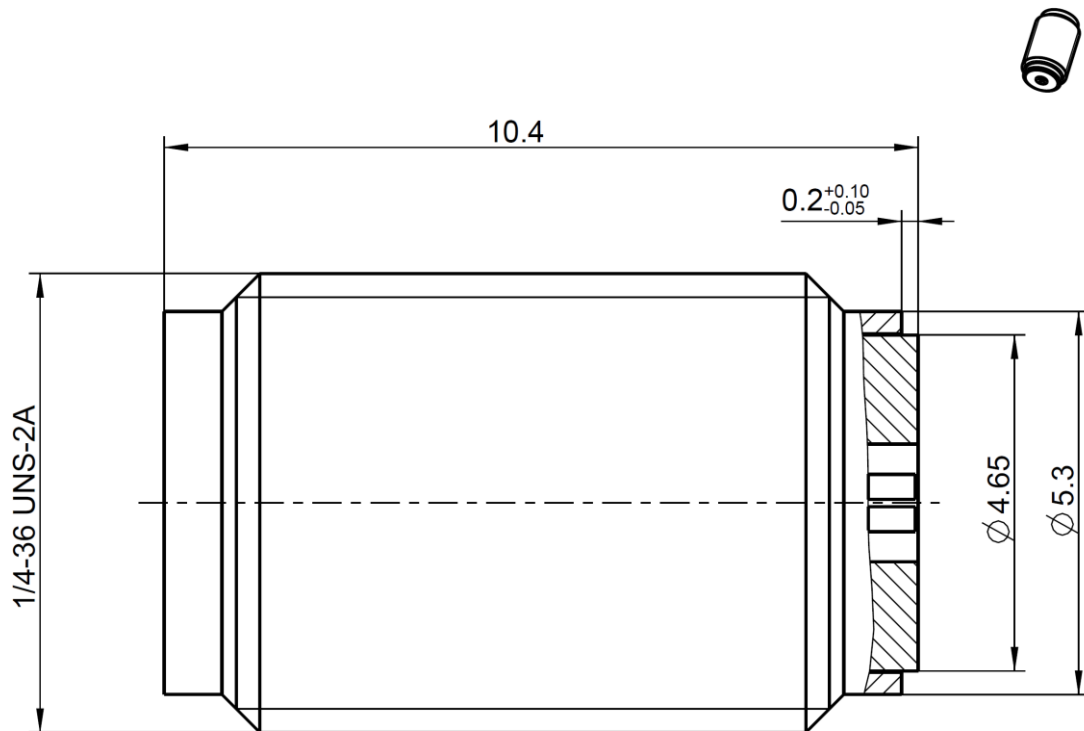


RPC-2.92 LAUNCHER JACK
FOR GLASSBEAD**02K526-800S3**

for glass-bead of 0.3 mm pin diameter

All dimensions are in mm; tolerances according to ISO 2768 m-H

InterfaceAccording to
Mechanically compatible withIEC 61169-35
RPC-3.50 and SMA**Documents**Test procedure
Assembly instructionPV_M_0131
02 E**Material and plating****Connector parts**Center contact
Outer contact RPC-2.92
Outer contact hermetical side
Dielectric**Material**CuBe
Stainless steel
Brass
PS**Plating**AuroDur®, gold plated
Passivated
AuroDur®, gold plated

TECHNICAL DATA SHEET

Rosenberger

RPC-2.92 LAUNCHER JACK
FOR GLASSBEAD

02K526-800S3

Electrical data

Impedance	50 Ω
Frequency	DC to 40 GHz
Return loss ¹⁾	≥ 23 dB, DC to 34 GHz ≥ 19 dB, 34 GHz to 40 GHz
Reflection coefficient (TDR) ²⁾	Step response max. ± 15 mU
Insertion loss	$\leq 0.04 \times \sqrt{f(\text{GHz})}$ dB
Insulation resistance	≥ 5 G Ω
Center contact resistance	≤ 3.0 m Ω
Outer contact resistance	≤ 2.0 m Ω
Test voltage	750 V rms
Working voltage	250 V rms
RF-leakage	≥ 100 dB up to 1 GHz

1) measured including measuring adaptor 02K122-900S3

2) measured with "time domain low-pass mode" including measuring adaptor 02K122-900S3

Mechanical data

Mating cycles	≥ 500
Center contact captivation	≥ 20 N
Coupling test torque RPC-2.92	1.70 Nm
Recommended torque RPC-2.92	0.80 Nm to 1.10 Nm
Coupling torque side	1.70 Nm max.

Environmental data

Temperature range	-40°C to +85°C
Thermal shock	MIL-STD-202, Method 107, Condition B
Corrosion	MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition D
Shock	MIL-STD-202, Method 213, Condition I
Moisture resistance	MIL-STD-202, Method 106
2002/95/EC (RoHS)	compliant

Tooling

Soldering fixture	02W001-000
Mounting wrench	02W007-000

Suitable glass bead

Glass bead	02Z101-000
------------	------------

Packing

Standard	100 pcs in blister
Weight	1.5 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Herbert Babinger	16.12.08	Armin Maiwlder	08.01.20	d00	19-2430	S. Schmid	03.01.20
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: info@rosenberger.de			Page 2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[02K526-800S3](#)