Technical Data Sheet		Rosenberger
RPC-2.92	Calibration Kit Plug	**02S30R-MSOS3**

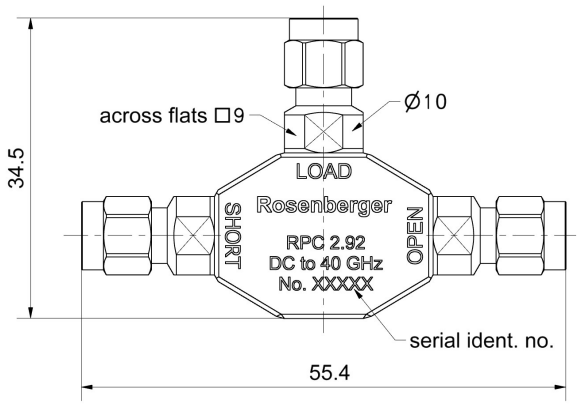

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to	IEC 61169-35
Mechanically compatible with	RPC-3.50 and SMA

Contents and Documentation

This kit is delivered with

- **Standard Definitions Card**
  Printed Standard Definitions that can be used on nearly all Vector Network Analyzers
- **Test Results Documentation**
- **Hard Shell Case**
- **Protection Caps**

Material and plating

Connector parts	**Material**	**Plating**
Center conductor	CuBe	Gold, min. 1.27 µm, over nickel
Outer conductor	Stainless steel	Passivated
Coupling nut	Stainless steel	Passivated
Body	Aluminum	black anodized
Dielectric	PS	
Substrate	Al_2O_3	

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Electrical data

Frequency range	DC to 40.0 GHz

Open

Error from nominal phase[1]	≤ 1.5°, DC to 4 GHz ≤ 4.0°, 4 GHz to 26.5 GHz ≤ 5.0°, 26.5 GHz to 40.0 GHz

Short

Error from nominal phase[2]	≤ 1.5°, DC to 4 GHz ≤ 4.0°, 4 GHz to 26.5 GHz ≤ 5.0°, 26.5 GHz to 40.0 GHz

Load

Return loss	≥ 40.0 dB, DC to 4 GHz ≥ 28.0 dB, 4 GHz to 26.5 GHz ≥ 25.0 dB, 26.5 GHz to 40.0 GHz
DC Resistance	50 Ω ± 0.5 Ω
Power handling (at 25 °C, sea level)	≤ 0.5 W, derate by 0.005 W/K

[1] The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances
[2] The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance

Mechanical data

Mating cycles	≥ 500
Maximum torque	1.70 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.08 mm

General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Open

Offset Z_o / Impedance / Z_o	50 Ω
Offset Delay	28.353 ps
Length (electrical) / Offset Length	8.50 mm
Offset Loss	2.40 GΩ/s
Loss	0.0118 dB/$\sqrt{\text{GHz}}$
Fringing Capacitances	C_0 = -7.38000 x 10^{-15} F / -7.38000 fF
	C_1 = 1180.00 x 10^{-27} F/Hz / 1.18000 fF /GHz
	C_2 = -44.8000 x 10^{-36} F/Hz^2 / -0.04480 fF /GHz^2
	C_3 = 0.54000 x 10^{-45} F/Hz^3 / 0.00054 fF /GHz^3

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Short

Offset Z_o / Impedance / Z_o	50 Ω		
Offset Delay	28.353 ps		
Length (electrical) / Offset Length	8.50 mm		
Offset Loss	2.40 GΩ/s		
Loss	0.0118 dB/ $\sqrt{GHz}$		
Short Inductance	L_0 = 0.0000 x 10^{-12} H	/	0.0000 pH
	L_1 = 0.0000 x 10^{-24} H/Hz	/	0.0000 pH/GHz
	L_2 = 0.0000 x 10^{-33} H/Hz^2	/	0.0000 pH/GHz^2
	L_3 = 0.0000 x 10^{-42} H/Hz^3	/	0.0000 pH/GHz^3

Load

Offset Z_o / Impedance / Z_o	50 Ω
Offset Delay	0.0000 ps
Length (electrical) / Offset Length	0.000 mm
Offset Loss	0.00 GΩ/s
Loss	0.0000 dB/ $\sqrt{GHz}$

Environmental data

Operating temperature range[3]	+20 °C to +26 °C
Rated temperature range of use[4]	0 °C to +50 °C
Storage temperature range	-40 °C to +85 °C
RoHS	compliant

[3] Temperature range over which these specifications are valid.

[4] This range is underneath and above the operating temperature range, within the calibration kit is fully functional and could be used without damage

Declaration of documentation

Standard delivery for this kit includes Test Results. The documentation issued reports which quantities were tested individually, traceable to national / international standards. Model based standard definitions of the calibration standards are reported in Agilent / Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Inspection interval

Recommendation	12 months

Packing

Standard	1 pce in bag
Weight	29 g/pce

Draft	Date	Approved	Date
Marcel Panicke	05.11.15	Markus Müller	07.05.20

Rev.	Engineering change number	Name	Date
f00	20-1038	Marion Striegler	08.05.20

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Email : info@rosenberger.de

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rosenberger:
02S30R-MSOS3