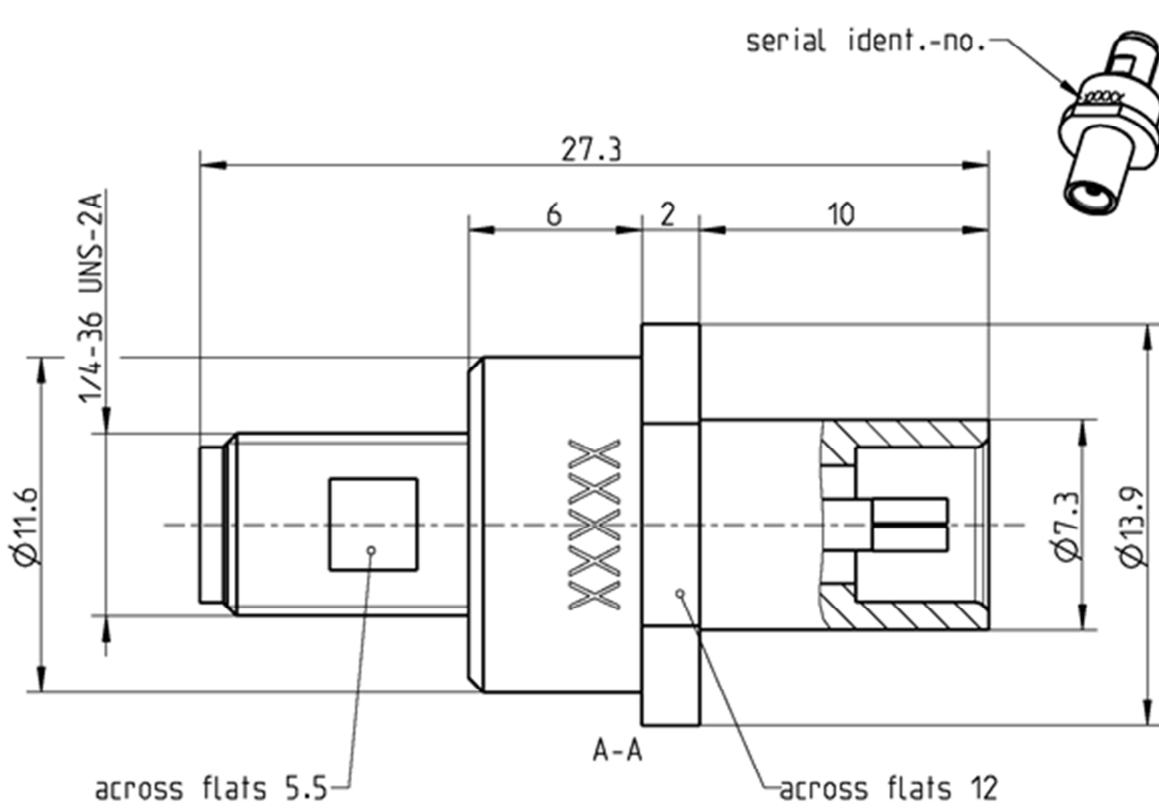


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/09_14/6.2

Technical Data Sheet		Rosenberger									
Calibration Adaptor RPC-3.50 Jack – RPC-SP Jack		03K110-K21S3									
 serial ident.-no. All dimensions are in mm; tolerances according to ISO 2768 m-H Interface RPC-3.50 according to RPC-3.50 mechanically compatible with RPC-SP in dependence on RPC-SP mechanically compatible with IEC 60169-23 RPC-2.92 and SMA MIL-STD 348 and IEC 61169-33 OSP and BMA Documents Application note AN001 “Calibration Services” Material and plating Connector parts Center conductor Outer conductor Dielectric Material CuBe Stainless steel PS Plating Gold, min. 1.27 µm, over nickel Passivated <tr><td colspan="2">Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de</td><td colspan="2">Tel. : +49 8684 18-0 Email : info@rosenberger.de</td></tr> <tr><td colspan="2"></td><td colspan="2">Page 1 / 3</td></tr>				Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de				Page 1 / 3	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de									
		Page 1 / 3									

Electrical data

Frequency	DC to 22 GHz
Return loss	≥ 34 dB, DC to 4 GHz ≥ 26 dB, 4 GHz to 22 GHz

Mechanical data

	RPC-3.50	RPC-SP
Mating cycles	≥ 500	≥ 1000
Maximum torque	1.70 Nm	
Recommended torque	0.90 Nm	
Engagement force		n.a. (no sliding outer conductor)
Disengagement force		n.a. (no sliding outer conductor)
Gauge	0.00 mm to 0.08 mm	3.12 mm to 3.22 mm

General standard definition

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Offset Z_0 / Impedance / Z_0	50 Ω
Offset Delay	70.8001 ps
Length (electrical) / Offset Length	21.23 mm
Offset Loss	3.60 G Ω /s
Loss	0.0221 dB/ $\sqrt{\text{GHz}}$

Environmental data

Operating temperature range ¹	+ 20 °C to +26 °C
Rated temperature range of use ²	0 °C to +50 °C
Storage temperature range	- 40 °C to +85 °C

RoHS	compliant
------	-----------

¹ Temperature range over which these specification are valid.

² This range is underneath and above the operating temperature range, within the calibration adaptor is fully functional and could be used without damage.

Declaration of calibration options

Factory Calibration

Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, **traceable to Rosenberger standards**, national / international standards are not available. Model based standard definitions are reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

Accredited Calibration

Not available.

For further, more detailed information see application note AN001 on the Rosenberger homepage.

Calibration interval

Recommendation 12 months

Recommended accessories

- Rosenberger Test Port Adaptor
- Rosenberger RPC-3.50 Kalibration-Kit 03CK001-150 and 03CK010-150
- Rosenberger VNA Test cable kit and Microwave Cable Assemblies

For further, more detailed information please visit our homepage www.rosenberger.com.

Packing

Standard 1 pce in box
Weight 9.6 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Herbert Babinger	19.05.04	Markus Müller	25.10.16	d00	16-1390	Marion Striegler	25.10.16
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de					Tel. : +49 8684 18-0 Email : info@rosenberger.de		Page 3 / 3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[03K110-K21S3](#)