
Technical Data Sheet		Rosenberger		
RPC-N 50 O	Offset Short Plua	05S12S-002S3		

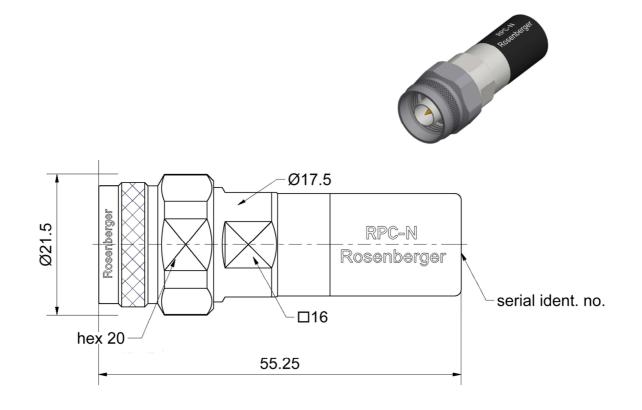

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface	
According to	IEC 61169-16

Documents	
Application note	AN001 "Calibration Services"

Material and plating				
Connector parts	Material	Plating		
Center conductor	CuBe	Gold, min. 1.27 µm, over nickel		
Outer conductor	Stainless steel	Passivated		
Coupling nut	Stainless steel	Passivated		

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page

1/3

# RF\_35/09.14/6.2

## Technical Data Sheet Rosenberger

RPC-N Offset Short 9 05\$12\$-002\$3

Electrical data

Frequency range DC to 18 GHz

Return loss  $\leq$  0.10 dB, DC to 4 GHz

 $\leq$  0.15 dB, 4 GHz to 8 GHz  $\leq$  0.20 dB, 8 GHz to 18 GHz

Error from nominal phase<sup>1</sup>  $\leq 1.2^{\circ}$ , DC to 4 GHz

≤ 1.5°, 4 GHz to 8 GHz ≤ 2.5°, 8 GHz to 18 GHz

#### Mechanical data

Gauge 5.28 mm to 5.32 mm

#### General standard definitions

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

 $\begin{array}{lll} \text{Offset $Z_{\rm o}$ / Impedance / $Z_{\rm o}$} & 50 \ \Omega \\ \text{Offset Delay} & 100.069 \ \text{ps} \\ \text{Length (electrical) / Offset Length} & 30.00 \ \text{mm} \\ \text{Offset Loss} & 0.80 \ \text{G}\Omega/\text{s} \\ \end{array}$ 

Loss  $0.0139 \, dB / \sqrt{GHz}$ 

Short Inductance<sup>2</sup>

#### **Environmental data**

Operating temperature range<sup>3</sup> +20 °C to +26 °C Rated temperature range of use<sup>4</sup> 0 °C to +50 °C Storage temperature range -40 °C to +85 °C

RoHS compliant

Tel. : +49 8684 18-0

Email: info@rosenberger.de

<sup>&</sup>lt;sup>1</sup> The nominal phase is defined by the Offset Delay, the Offset Loss and the Short Inductance.

<sup>&</sup>lt;sup>2</sup> Short Inductances are determined individually for each Short circuit and are documented in a Calibration Certificate.

<sup>&</sup>lt;sup>3</sup> Temperature range over which these specification are valid.

<sup>&</sup>lt;sup>4</sup> This range is underneath and above the operating temperature range, within the short circuit is fully functional and could be used without damage.

Technical Data Sheet			Rosenberger		
	RPC-N 50 Ω	Offset Short Plug	05S12S-002S3		

#### Declaration of calibration options

#### **Factory Calibration**

Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format.

#### **Accredited Calibration**

Optional this calibration standard can be delivered with an Accredited Calibration (DAkkS) having the highest confidence in the traceability. The DAkkS Calibration Certificate issued reports individual calibration results in a complex format, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format as well as in a dense data set needed for data based standard definitions. The uncertainties are smaller than in a Factory Calibration.

For further, more detailed information see application note AN001 on the Rosenberger homepage.

Calibration interval	
Recommendation	12 months
D	Ī
Packing	
Standard	1 pce in box
Weight	64 g/pce

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date		Rev.	Engineering change number	Name	Date
Marcel Panicke	24.02.17	Markus Müller	14.03.17		a00	17-s086	Marcel Panicke	14.03.17

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de

Tel. : +49 8684 18-0 Email : info@rosenberger.de Page

3/3

### **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Rosenberger: 05\$12\$-002\$3