


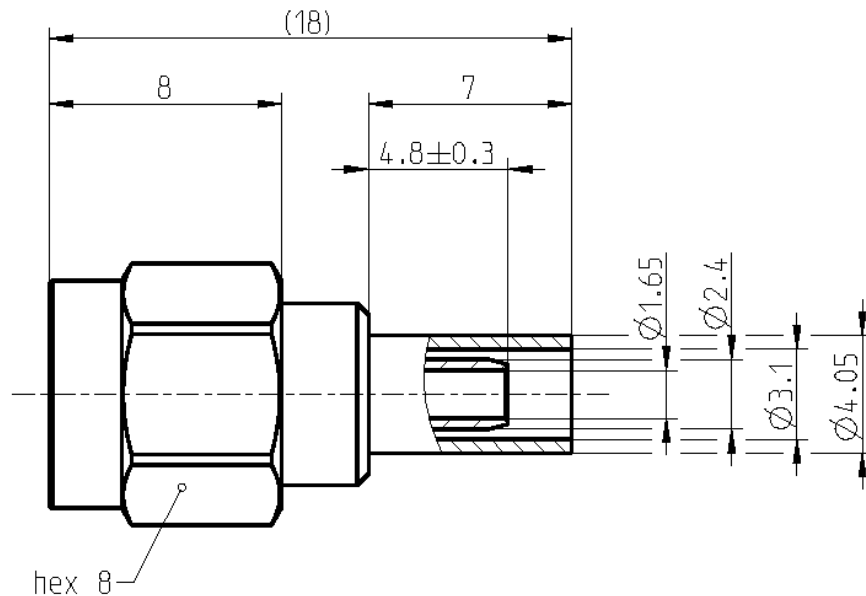

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to

IEC 60169-15, EN 122110, MIL-STD-348A, Fig. 310

Documents

Assembly instruction

32 B5

Material and plating

Connector parts

Center contact
Outer contact
Dielectric
Gasket
Coupling nut
Crimping ferrule

Material

Brass
CuBe or equiv.
PTFE
Silicone
CuBe or equiv.
Copper

Plating

AuroDur®, gold plated
Flash white bronze over silver(e.g. Optargen®)

White bronze(e.g. Optalloy®)
White bronze(e.g. Optalloy®)

Technical Data Sheet

Rosenberger

SMA

Straight Plug

32S107-302N5**Electrical data**

Impedance	50 Ω
Frequency	DC to 12.4 GHz
VSWR	$\leq 1.05 + 0.01 \times f$ [GHz], DC to 5 GHz
Insertion loss	$\leq 0.03 \times \sqrt{f(\text{GHz})}$ dB, DC to 5 GHz
Insulation resistance	$\geq 5 \times 10^3$ M Ω
Center contact resistance	≤ 3 m Ω
Outer contact resistance	≤ 2 m Ω
Test voltage	1000 V rms
Working voltage	480 V rms
Power handling (at 20 °C, sea level, VSWR 1.0)	≤ 200 W @ 2 GHz
RF-leakage	≥ 100 dB up to 1 GHz

*- Limitations are possible due to the used cable type -***Mechanical data**

Mating cycles	min. 500
Coupling nut retention	≥ 270 N
Center contact captivation: axial	≥ 27 N
Coupling test torque	max. 1.7 Nm
Recommended torque	0.8 Nm to 1.1 Nm

Environmental data

Temperature range	-65°C to +165°C
Thermal shock	MIL-STD-202, Meth. 107, Cond. B
Corrosion	MIL-STD-202, Meth. 101, Cond. B
Vibration	MIL-STD-202, Meth. 204, Cond. D
Shock	MIL-STD-202, Meth. 213, Cond. I
Moisture resistance	MIL-STD-202, Meth. 106
RoHS	compliant

Tooling

Crimping tool	11W150-000
Crimp insert	11W150-102

Suitable cables

RG 174 A/U, RG 188 A/U, RG 316 /U

Weight

Weight	2.95 g/pce
--------	------------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

For the installation of the electrotechnical equipment, particular electrotechnical expertise is required.



Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
E. Truc-Vallet	25.02.14	Chr. Janßen	17.11.20	c00	20-1927	S. Huber-Siegl	17.11.20
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[32S107-302N5](#)