


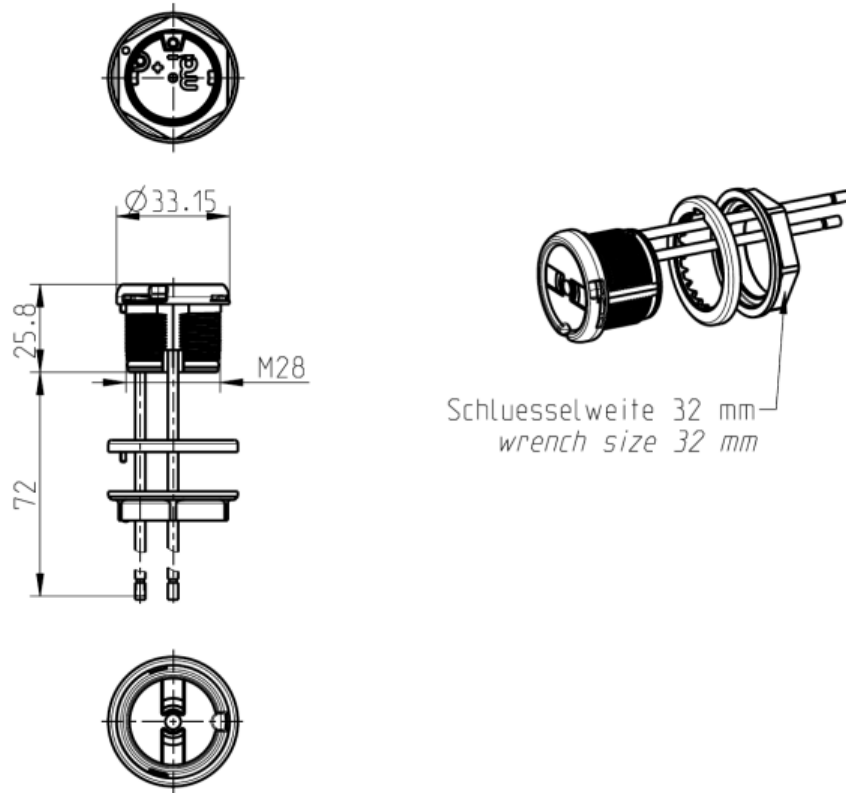

All dimensions are in mm; tolerances according to ISO 2768 m-H

Component

Powersystem Port 12V Pro for use with

Magcode Powersystem Clip 12V Pro M2K203-1AE
MagCode spring loaded cover M2Z101-3XX

Documents

Assembly instruction
Panel piercing

MA_M2V002
MB_378

Material and plating

Parts

Housing
Spacer (2)
Nut
Pins interface area

Material

PBT ASA GF20
PBT ASA GF20
PBT ASA GF20
CuSn6

Plating

none
none
none
PdNi, 2-3µm

Technical Data Sheet

Rosenberger

PowerSystem

M2S103-3XX



POWERSYSTEM
PORT 12V PRO

Electrical data

Connection Technology	cable
Rated voltage	12 V DC
Max current load	25 A at +70°C

Mechanical data

Locking mechanism with port M2S101-3xx	magnetic
Mounting cut-out	Ø 28mm (M28)
Duty cycles without load	>10000 cycles
Duty cycles at 15A	4000 cycles
Vibration resistance	3 axes, 8h, 5Hz-200Hz, 8,5m/s ²
Shock resistance	3 axes, 13000 shocks, 11ms. 30g
Tightening torque	1,5 Nm +/- 0,3 Nm

Environmental data

Temperature range	-40°C to +105°C
Dust and water resistance (front side)	IP6K9K
Dust and water resistance (connection side)	IP5K0

Packing

Standard	Bulk
Weight	~ 26,9g

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Axel Botsch	30/07/09	W. Lankes	20/11/12	c00	12-1019	M. Mueller	20/11/12

Rosenberger Hochfrequenztechnik GmbH & Co. KG
P.O.Box 1260 D-84526 Tittmoning Germany
www.rosenberger.de

Tel. : +49 8684 18-0
Fax : +49 8684 18-499
Email : info@rosenberger.de

Page

2 / 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Rosenberger:](#)

[M2S103-3XX](#)