



## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 to 277 Vac typical	100 W	30 to 56 Vdc	1700 to 2100 mA	up to 90% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100%	0.75 sec

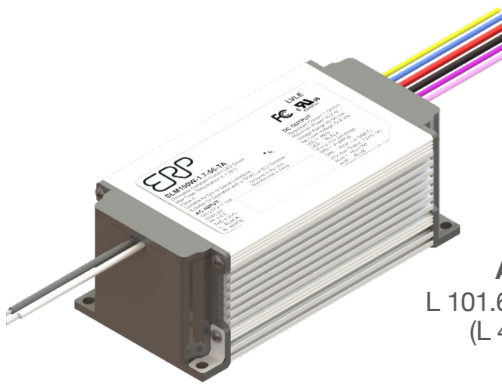

**Aluminum Case:**  
L 101.6 x W 50.8 x H 38.5mm  
(L 4 x W 2 x H 1.52 in)

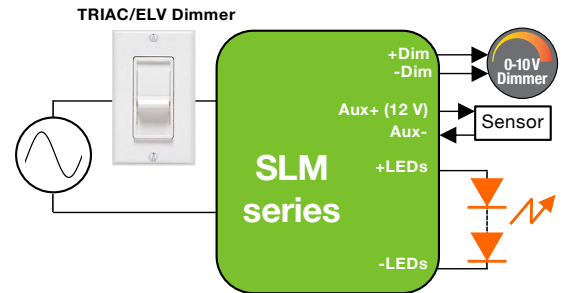


### FEATURES

- Compatible with TRIAC (forward-phase or leading-edge) / ELV (reverse-phase or trailing-edge) and 0-10 V dimmers
- TRIAC and ELV dimming at 120 Vac only
- 12 V/100 mA auxiliary output
- IP66-rated case with silicone-based potting
- 90°C maximum case hot spot temperature
- Protections: output open load, short-circuit (latch-off), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class A at 120 and 277 Vac
- Complies with ENERGY STAR® luminaire specification and DLC (Design Light Consortium®) technical requirements
- Worldwide safety approvals


### TYPICAL APPLICATIONS

- Outdoor & Indoor
- Street lights, Area lights
- Horticulture grow lights
- Industrial high-bay lights

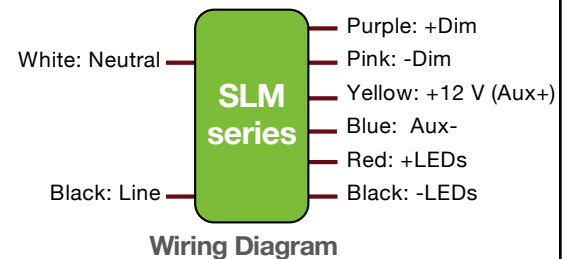

## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 1 - ORDERING INFORMATION - MODEL DESCRIPTION

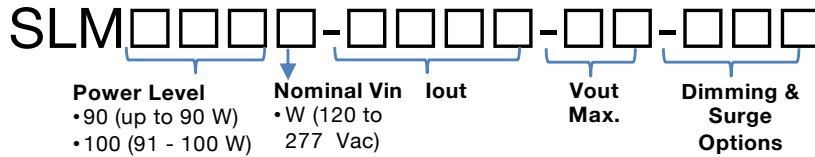


ERP Part Number	Nominal Input Voltage (Vac)	Iout (A)	Max Output Power (W)	Output Voltage (Vdc)			Open Loop (no load) Voltage (Vdc)	Options	
				Min	Nom	Max		Dimming	Surge & IP rating
SLM90W: up to 90 W									
SLM090W-2.1-42-TC	120 to 277	2.1	88.2	30	37.8	42	50	T: TRIAC, ELV & 0-10V dimming (1-100%)	A: 4kV DM/4kV CM & IP66
SLM100W: 91 to 100 W									
SLM100W-1.7-56-TA	120 to 277	1.7	95.2	40	50.4	56	72.8	T: TRIAC, ELV & 0-10V dimming (1-100%)	A: 4kV DM/4kV CM & IP66

#### Notes:

- For additional options of output current and output voltage, contact your sales representative or send an email to: [SaveEnergy@erp-power.com](mailto:SaveEnergy@erp-power.com)

## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 2 - INPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
Input Voltage Range (Vin)	Vac	90	120, 230, 277	305	The rated output current for each model is achieved at Vin ≥ 115 Vac and at Vin ≥ 209 Vac, at nominal load.
Input Frequency Range	Hz	47	60	63	
Power Factor (PF)		0.9	> 0.9		At nominal input voltage and with nominal LED voltage
Input Current (Iin)	A			1.8	At 120 Vac nominal input voltage
Inrush Current		Meets NEMA-410 requirements			At any point on the sine wave and 25°C
Leakage Current	μA			500 μA	Measured at nominal input voltage per IEC60950-1
Input Harmonics		Complies with IEC61000-3-2 for Class C equipment			
Total Harmonics Distortion (THD)				20%	<ul style="list-style-type: none"> <li>•At nominal input voltage and nominal LED voltage</li> <li>•Complies with DLC technical requirements</li> </ul>
Efficiency	%	-	up to 90%	-	Measured with nominal input voltage, a full sinusoidal wave form and without dimmer connected
Isolation	The AC input to the main DC output is isolated and meets Class II reinforced/double insulation power supply 				

### 3 - OUTPUT SPECIFICATION (@25°C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
<b>MAIN CONSTANT CURRENT OUTPUT</b>					
Output Voltage (Vout)	Vdc	30		56	See ordering information for details
Output Current (Iout)	A	1.7		2.1	<ul style="list-style-type: none"> <li>•See ordering information for details</li> <li>•The rated output current for each model is achieved at Vin ≥ 115 Vac and at Vin ≥ 209 Vac, at nominal load.</li> </ul>
Output Current Regulation	%	-5		5	<ul style="list-style-type: none"> <li>•At nominal AC line voltage</li> <li>•Includes load and current set point variations</li> </ul>
Output Current Overshoot	%	-	-	10	The driver does not operate outside of the regulation requirements for more than 500 ms during power on with nominal LED load and without dimmer.
Ripple Current		≤ 40% of rated output current for each model			<ul style="list-style-type: none"> <li>•Measured at nominal LED voltage and nominal input voltage without dimming.</li> <li>•Calculated in accordance with the IES Lighting Handbook, 9th edition.</li> </ul>
Dimming Range (% of Iout)	%	1.0		100	<ul style="list-style-type: none"> <li>•The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers.</li> <li>•When testing, if light is measured, dimming range is based on light output. If no light is measured, dimming range is based on percentage of output current.</li> <li>•Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal Vf (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage.</li> </ul>
Start-up Time	s			0.75	With nominal LED voltage, nominal AC line voltage and without dimmer attached

#### 12 V AUXILIARY CONSTANT VOLTAGE OUTPUT

Output Voltage (Vout)	Vdc	10.2	12	13.2	The voltage regulation is +10%/-15% and the ripple voltage shall be ≤ 0.4V.
Output Current (Iout)	mA		100		

## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 4 - 0-10 V DIMMING CONTROL (@25° C ambient temperature)

	Units	Minimum	Typical	Maximum	Notes
<b>+Dim Signal, -Dim Signal</b>	The SLM series operate only with 0-10V dimmers that sink current. The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim signal pins can be used to adjust the output setting via a standard commercial wall dimmer, an external control voltage source (0 to 10 Vdc), or a variable resistor when using the recommended number of LEDs. The dimming input permits 1% to 100% dimming.				
<b>Dimming Range (% of Iout)</b>	%	1		100	<ul style="list-style-type: none"> <li>The dimming range is dependent on each specific dimmer. It may not be able to achieve 1% dimming with some dimmers.</li> <li>Dimming performance is optimal when the driver is operated at its nominal output voltage matching the LED nominal Vf (forward voltage). Dimming performance may vary when the driver is operated near its minimum output voltage.</li> </ul>
<b>Current Supplied by the +Dim Signal Pin</b>	mA			2.5	
<b>Output Current Tolerance While Being Dimmed</b>	%			±2	
<b>Isolation</b>	The 0-10 V circuit is isolated from the AC input and meets Class II reinforced/double insulation power supply. <input type="checkbox"/>				

### 5 - ENVIRONMENTAL CONDITIONS

	Units	Minimum	Typical	Maximum	Notes
<b>Operating Ambient Temperature (Ta)</b>	°C	-40		50	
<b>Maximum Case Temperature (Tc)</b>	°C			+90	Case temperature measured at the hot spot •tc (see label in page 9)
<b>Storage Temperature</b>	°C	-40		+85	
<b>Humidity</b>	%	5	-	95	Non-condensing
<b>Cooling</b>	Forced air cooling or heatsink base plate (aluminum baseplate: 210mm x 200mm x 2mm) is required for total continuous power exceeding 120 W.				
<b>Acoustic Noise</b>	dBA			24	Measured at a distance of 1 meter, without any dimmers
<b>Mechanical Shock Protection</b>	per EN60068-2-27				
<b>Vibration Protection</b>	per EN60068-2-6 & EN60068-2-64				
<b>MTBF</b>	> 200,000 hours when operated at nominal input and output conditions, and at Tc ≤ 70°C				
<b>Lifetime</b>	50,000 hours at Tc ≤ 70°C maximum case hot spot temperature (see hot spot •tc on label in page 9)				

## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 6 - EMC COMPLIANCE AND SAFETY APPROVALS

EMC Compliance			
<b>Conducted and Radiated EMI</b>		FCC CFR Title 47 Part 15 Class A at 120 Vac and Class A at 277 Vac	
<b>Harmonic Current Emissions</b>		IEC61000-3-2	For Class C equipment
<b>Voltage Fluctuations &amp; Flicker</b>		IEC61000-3-3	
<b>Immunity Compliance</b>	<b>ESD (Electrostatic Discharge)</b>	IEC61000-4-2	6 kV contact discharge, 8 kV air discharge, level 3
	<b>RF Electromagnetic Field Susceptibility</b>	IEC61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at a distance of 3 meters
	<b>Electrical Fast Transient</b>	IEC61000-4-4	± 2 kV on AC power port for 1 minute, ±1 kV on signal/control lines
	<b>Surge</b>	IEC61000-4-5	± 4 kV line to line (differential mode) / ± 4 kV line to common mode ground (tested to secondary ground) on AC power port, ±0.5 kV for outdoor cables. Check the ordering information as other models have different surge protection levels.
	<b>Conducted RF Disturbances</b>	IEC61000-4-6	3 V, 0.15-80 MHz, 80% modulated
	<b>Voltage Dips</b>	IEC61000-4-11	>95% dip, 0.5 period; 30% dip, 25 periods; 95% reduction, 250 periods
<b>Transient Protection</b>	<b>Ring Wave</b>		ANSI/IEEE c62.41.1-2002 & c62.41.2-2002 category A, 2.5 kV ring wave

Safety Agency Approvals	
<b>UL</b>	UL8750 recognized
<b>cUL</b>	CAN/CSA C22.2 No. 250.13-14 LED equipment for lighting applications

Safety					
	Units	Minimum	Typical	Maximum	Notes
<b>Hi Pot (High Potential)</b>	Vdc	2500			<ul style="list-style-type: none"> <li>Insulation between the input (AC line and Neutral) and the output</li> <li>Tested at the RMS voltage equivalent of 1768 Vac</li> </ul>

### 7 - PROTECTION FEATURES

#### Under-Voltage (Brownout)

The SLM series provides protection circuitry such that an application of an input voltage below the minimum stated in paragraph 1 (Input Specification) shall not cause damage to the driver.

#### Short Circuit

The SLM series is protected such that a short from any output to return shall not result in a fire hazard or shock hazard. In the event of a short, the driver shuts down and latches off as a result of short circuit fault for main output. Removal of fault and AC recycling returns the driver to normal operation.

#### Internal Over temperature Protection

The SLM series incorporates circuitry that prevents internal damage due to an over temperature condition. An over temperature condition may be a result of an excessive ambient temperature or as a result of an internal failure. When the over temperature condition is removed, the driver shall automatically recover.

#### Output Open Load

When the LED load is removed, the output voltage of the SLM series is limited to 1.3 times the maximum output voltage of each model.

## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 8 - PHASE-CUT DIMMING

The SLM series offers Tri-Mode dimming™ compatibility with phase-cut dimmers (both TRIAC and ELV) and 0-10V dimmers. TRIAC and ELV dimming is only offered at 120 Vac. Figures 1 and 2 show the typical output current versus conduction angle at nominal input voltage. The minimum current (1% of maximum current) is attained when the dimming angle is  $\leq 23$  degree and after the SLM driver is turned on at max conduction angle. The start-up time of 750 ms is not guaranteed when the SLM driver turns-on at a low dimming angle with a TRIAC dimmer.

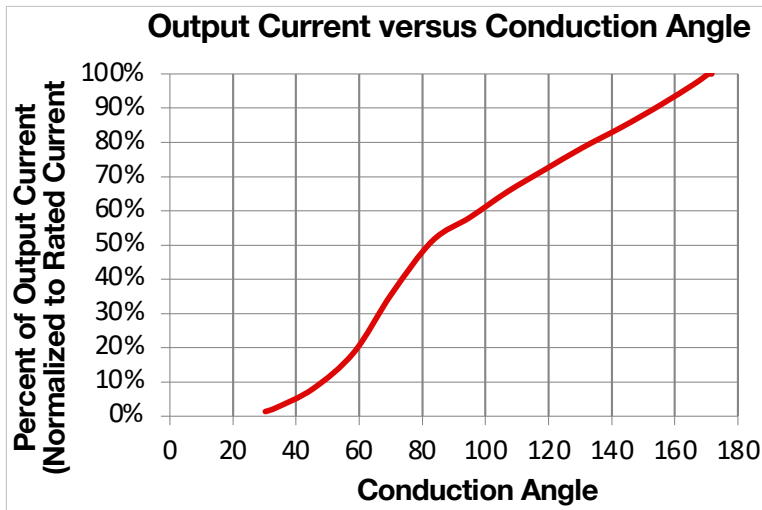


Figure 1

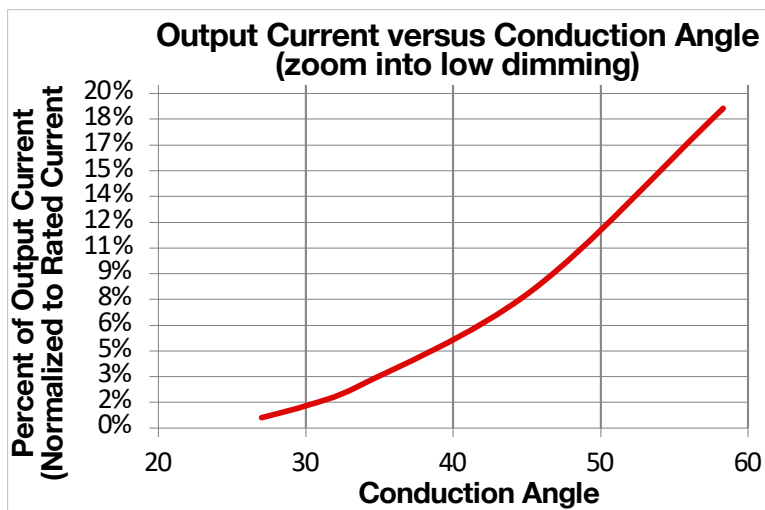


Figure 2

### 9 - COMPATIBLE PHASE-CUT ELV DIMMERS and TRIAC DIMMERS

#### 120 VAC ELV DIMMERS

Manufacturer	Series	Type
Leviton	Vizia	VPE06-1L
Lutron	Diva	DVELV-303P
Lutron	Skylark	SELV-300P
Leviton	Illumatech	IPE04-1L
Lutron	Maestro	MAELV-600
Lutron	Faetra	FAELV-500
Lightolier	Sunrise	ZP260QE

#### 120 VAC TRIAC DIMMERS

Manufacturer	Series	Model
Lutron	Skylark	S-603PG
Leviton	Sureslide	6631-LW
Lutron	Diva	DVCL-153P
Lutron	Diva	DV-600P
Lutron	Toggler	TGCL-153P
Lutron	Skylark	S-600P
Leviton	Trimatron	6683-IW
Leviton	Vizia	VPI06-1L
Leviton	Sureslide	6633-PL
Lutron	Toggler	TG-600P
Lutron	Lumea	LG-600P
Lutron	Skylark Contour	CT-103P
Lutron	Diva	DV-603P
Cooper	Skye	SLC03P
Lutron	Skylark	SF-10P
Lutron	Skylark	SCL-153P
Lutron	Lumea	LGCL-153PLH

## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 10 - 0-10 V DIMMING

The SLM drivers operate only with 0-10V dimmers that sink current. They are not designed to operate with 0-10V control systems that source current, as used in theatrical/entertainment systems. Developed in the 1980's, the 0-10V sinking current control method is adopted by the International Electrotechnical Commission (IEC) as apart of their IEC Standard 60929 Annex E.

The method to dim the output current of the driver is done via the +Dim/-Dim Signal pins. The +Dim/-Dim Signal pins respond to a 0 to 10 V signal, delivering 1% to 100% of the output current based on rated current for each model. A pull-up resistor is included internal to the driver. When the +Dim input (purple) is short circuited to the -Dim wire (pink) or to the -LED wire (black), there is no output current. When the +Dim input (purple) is  $\leq 1$  V, the output current is programmed to  $\leq 10\%$  of rated current. If the +Dim input is  $>10$  V or open circuited, the output current is programmed to 100% of the rated current.

When not used, the -Dim wire (pink) and to the +Dim wire (purple) can be capped or cut off. In this configuration, no dimming is possible and the driver delivers 100% of its rated output current.

The maximum source current (flowing from the driver to the 0-10V dimmer) supplied by the +Dim Signal pin is  $\leq 2.5$  mA. The tolerance of the output current while being dimmed shall be  $\pm 2\%$  typical.

Figure 3 shows the 0-10V dimming transfer function.

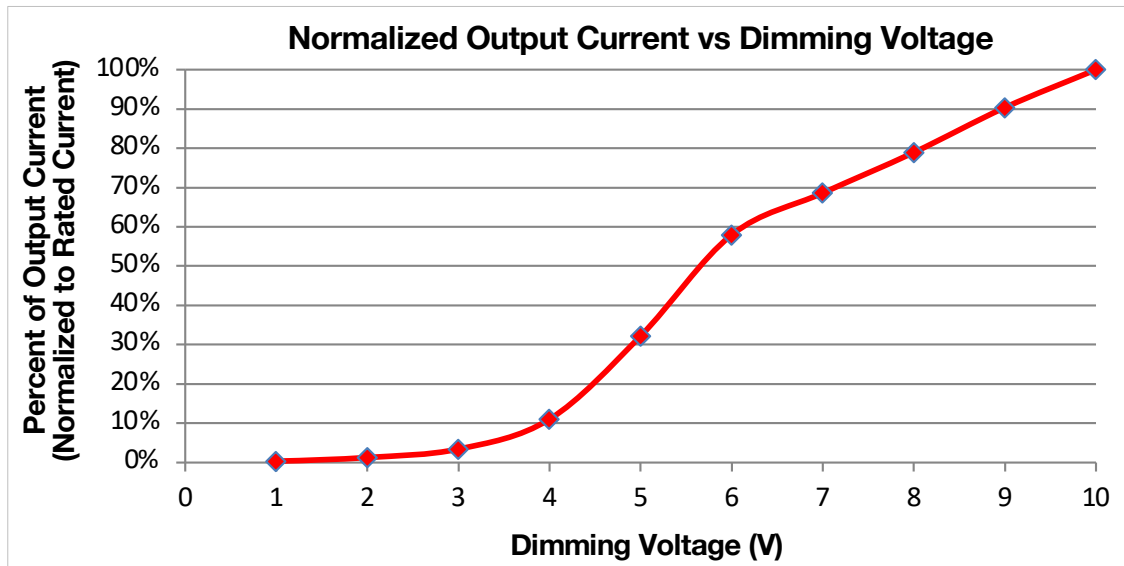


Figure 3

### 11 - COMPATIBLE 0-10 V DIMMERS

- Lutron, Nova series (part number NFTV)
- Lutron, Diva series (part number DVTV)
- Leviton: IllumaTech IP710-DL



## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 12 - MECHANICAL DETAILS

- Packaging Options:** Aluminum extruded case
- I/O Connections:** Flying leads, 18 AWG on power leads, 18 AWG on control leads, 203 mm (8 in) long, stranded, stripped by approximately 9.5mm, and tinned. All the wires, on both input and output, have a 300 V insulation rating.
- Ingress Protection:** IP66 rated
- Mounting Instructions:** The driver must be secured on a flat surface through the four mounting tabs, shown here below in the case outline drawings.

### 13 - OUTLINE DRAWINGS

- Dimensions:** L 101.6 x W 50.8 x H 38.5 mm (L 4.0 x W 2.0 x H 1.52 in)
- Volume:** 198.7 cm<sup>3</sup> (12.13 in<sup>3</sup>)
- Weight:**

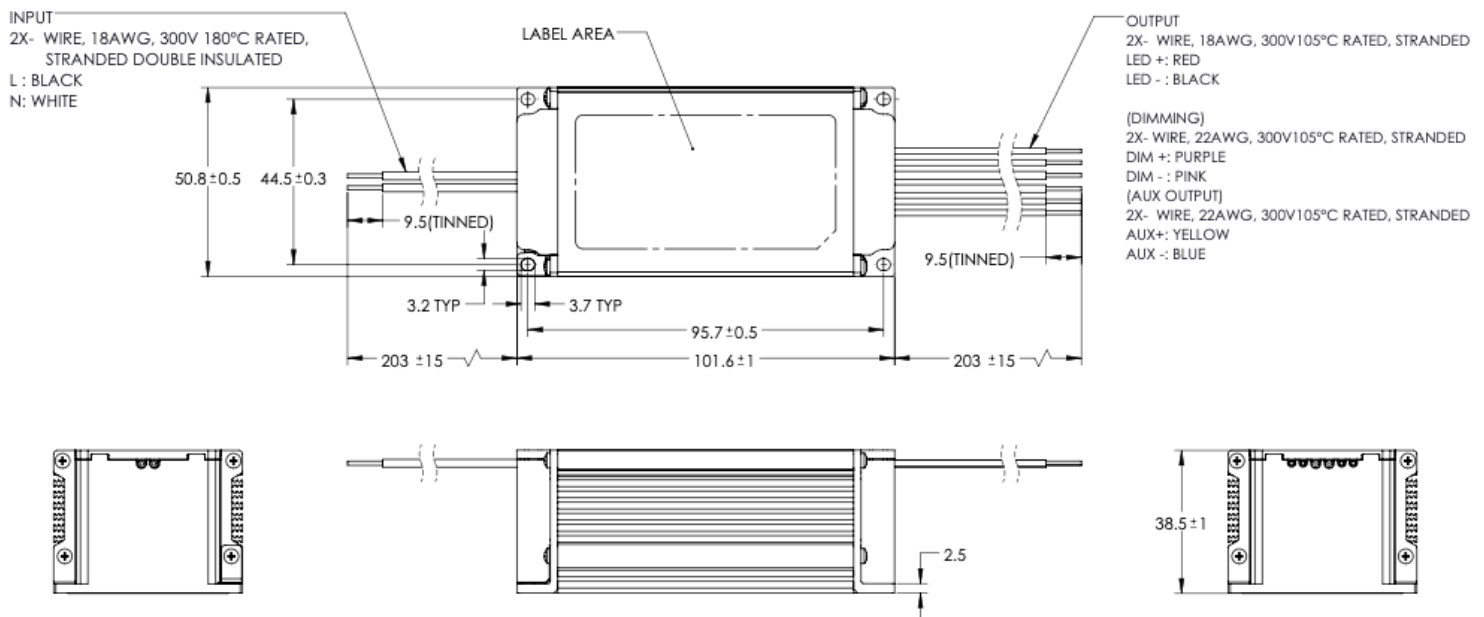


Figure 4



## Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V) High Power CC LED Drivers with 1-100% Dimming Range and with 12 V / 100 mA Auxiliary Output

### 14 - LABELING

The SLM100W-1.7-56-TA is used in figure 5 as an example to illustrate a typical label.

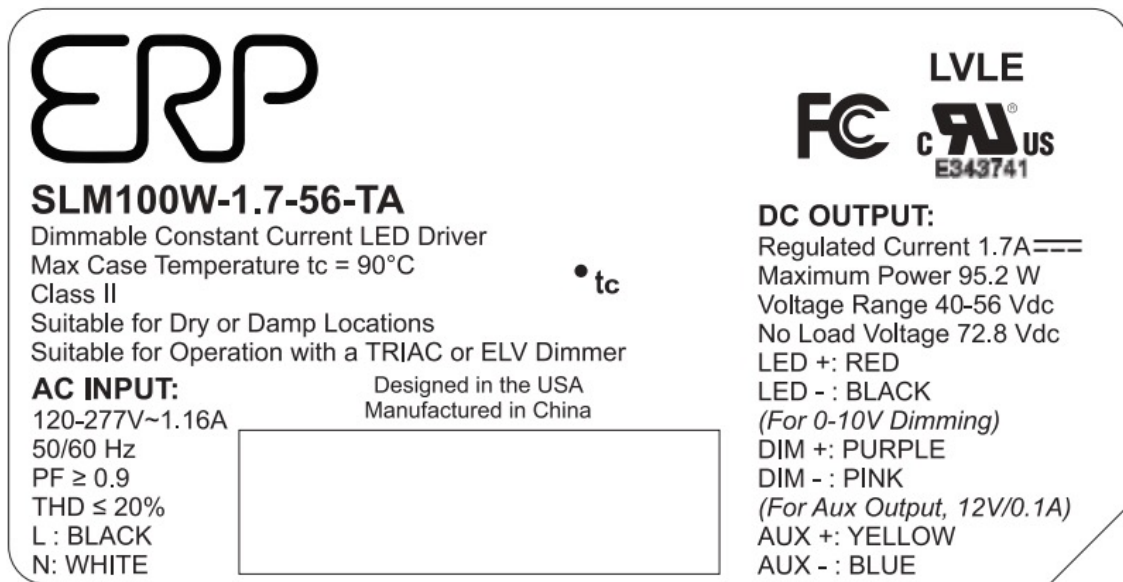


Figure 5

### USA Headquarters

Tel: +1-805-517-1300  
Fax: +1-805-517-1411  
893 Patriot Drive, Suite E,  
Moorpark, CA 93021, USA

### CHINA Operations

Tel: +86-756-6266298  
Fax: +86-756-6266299  
No. 8 Pingdong Road 2  
Zhuhai, Guangdong, China 519060

ERP Power, LLC (ERP) reserves the right to make changes without further notice to any products herein. ERP makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ERP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in ERP data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ERP does not convey any license under its patent rights nor the rights of others. ERP products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the ERP product could create a situation where personal injury or death may occur. Should Buyer purchase or use ERP products for any such unintended or unauthorized application, Buyer shall indemnify and hold ERP and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ERP was negligent regarding the design or manufacture of the part. ERP is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERP Power:](#)

[SLM90W-1.05-84-ZA](#)