

Features

- Universal Input Range 80~264Vac
- High Efficiency up to 94.5%
- 3"x 5" Compact Size
- High Power Density Up to 20.96W/Inch³
- 390W Natural, 470 ~ 500W Conduction Convection
- No Load Power Consumption<0.5W
- Over Temperature Protection
- PS On/Off Remote Control
- Power Good & Power Fail Signal
- +5V Stand-by, 12V Fan Output
- Low Inrush Current
- Active PFC Meets EN61000-3-2
- Meets EN55032 Class B
- Meets IEC/EN60335-1
- Class I



CFM500S series

500 WATT AC-DC



MODEL	OUTPUT		PUT CURI NOTE1		VOLTAGE	Y &NOISE		LINE	LOAD REGULATION	%EFF.
NUMBER	VOLTAGE	With Fan	Witho	out Fan	NOTE2	NOTE3	ADJ. RANCE	NOTE4	NOTE5	(Тур)
		Willi Fall	Cover	Open		NOTES		NOTE	NOTES	
CFM500S120	12 V	41.67A	27.5A	25A	±1%	1%	11.4~12.6 V	±0.5%	±1%	91.5%
CFM500S180	18 V	27.78A	18.33A	16.67A	±1%	1%	17.1~18.9 V	±0.5%	±1%	92.5%
CFM500S240	24 V	20.83A	17.08A	15.83A	±1%	1%	22.8~25.2 V	±0.5%	±1%	93%
CFM500S360	36 V	13.89A	11.39A	10.56A	±1%	1%	34.2~37.8 V	±0.5%	±1%	94.5%
CFM500S480	48 V	10.42A	8.54A	7.92A	±1%	1%	45.6~50.4 V	±0.5%	±1%	94%
				Sta	nd-by Output	Voltage		-		
All	+5V		1A		±3%	1%		±1%	±5%	
				I	Fan Output Vo	oltage				
All	+12V	().5A (NOTE	6)						

Note:

1. Forced air Convection with 21CFM Fan.

2. Voltage Accuracy is Set at Full Load and 25 $^\circ\!\mathrm{C}$ Ta.

3. Add a 0.1uF Ceramic Capacitor and a 10uF E.L. Capacitor to Output for Ripple & Noise Measuring @20MHz B.W.

4. Line Regulation is Measured from High Line to Low Line with Rated Load.

5. Load Regulation is Measured from Full Load to 10% Rated Load.

6. Fan Output Can Only Operate Normal When the Stand-by Output is Above 0.5A.

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Туре
CFM500	0	XXX	Y (Option)
CFM500	S: Medical	120: 12VDC 180: 18VDC 240: 24VDC 360: 36VDC 480: 48VDC	None: Open frame C: With Cover

Part Number Example:

CFM500S120: Open Frame, 500W, 12Vdc Output CFM500S120C: With Case, 500W, 12Vdc Output

www.cincon.com



TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	80		264	V _{ac} V _{dc}
Operating Case Temperature	See Derating Curve	All	-40		85	°C
Storage Temperature		All	-40		85	°C
Operating Altitude		All			5000	m

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
Operating Voltage Range		All	100		240	V _{ac}
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, V _{in} =100Vac	All			6	А
Leakage Current		All			3.5	mA
Inrush Current	V_{in} =240Vac, Cold Start at 25°C.	All		8.5		A

OUTPUT CHARACTERISTICS

NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
	CFM500S120	11.88	12	12.12	
	CFM500S180	17.82	18	18.18	
$V_{\text{in}} = \! \text{Nominal } V_{\text{in}}, I_0 \! = \! \text{Io max.}, T_c \! = \! 25^\circ \! \mathbb{C}$.	CFM500S240	23.76	24	24.24	V _{dc}
	CFM500S360	35.64	36	36.36	
	CFM500S480	47.52	48	48.48	
	CFM500S120			41.67	
	CFM500S180			27.78	
	CFM500S240			20.83	А
	CFM500S360			13.89	
	CFM500S480			10.42	
V _{in} =115Vac	All		16		ms
10% Load to Full Load	All			±1.0	%
V _{in} =High Line to Low Line	All			±0.5	%
	CFM500S120			16	
	CFM500S180			30	
Latch Off (AC Recycle to Reset)	CFM500S240			35	V _{dc}
	CFM500S360			50	
	CFM500S480			63	
Auto Recovery	All	120		190	%
Auto Recovery	All				
	CFM500S120			120	
	CFM500S180			150	
	CFM500S240			150	mV
	CFM500S360			200	
	CFM500S480			250	
	CFM500S120			42900	
1. Ambient Temperature=25℃	CFM500S180			28600	
	CFM500S240			20800	uF
	V _{in} =Nominal V _{in} , I _o =Io max., T _o =25°C. V _{in} =115Vac 10% Load to Full Load V _{in} =High Line to Low Line Latch Off (AC Recycle to Reset) Auto Recovery	Vin=Nominal Vin, Io=Io max., To=25°C. CFM500S120 Vin=Nominal Vin, Io=Io max., To=25°C. CFM500S240 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S180 Vin=115Vac All 10% Load to Full Load All Vin=High Line to Low Line All Latch Off (AC Recycle to Reset) CFM500S120 CFM500S120 CFM500S120 1. Ambient Tempera	CFM500S120 11.88 Vin=Nominal Vin, Io=Io max., To=25°C. CFM500S120 11.88 CFM500S240 23.76 CFM500S360 35.64 CFM500S120 CFM500S120 CFM500S120 CFM500S120 CFM500S240 CFM500S120 CFM500S240 CFM500S240 Vin=115Vac All CFM500S120 CFM500S480 Vin=115Vac All CFM500S120 CFM500S120 Vin=High Line to Low Line All CFM500S120 CFM500S120 Latch Off (AC Recycle to Reset) CFM500S120 CFM500S180 CFM500S120 Latch Off (AC Recycle to Reset) CFM500S120 CFM500S180 CFM500S120 Auto Recovery All 120 Auto Recovery All 120 Auto Recovery All 120 CFM500S120 CFM500S180 CFM500S180 . Oscilloscope is 20MHz Band Width. CFM500S180 CFM500S180	Vn=Nominal Vn, lo=lo max., Tc=25°C. CFM500S120 CFM500S240 11.88 23.76 12 24 24 24 Vn=Nominal Vn, lo=lo max., Tc=25°C. CFM500S240 23.76 24 CFM500S240 23.76 24 24 CFM500S120 CFM500S120 CFM500S120 25.64 36 CFM500S240 35.64 36 CFM500S240 Vn=115Vac All 16 16 16 10% Load to Full Load All 16 16 10% Load to Full Load All 16 10% Load to Full Load All 16 10% Load to Full Load All 120 Latch Off (AC Recycle to Reset) CFM500S120 CFM500S240 CFM500S240 Auto Recovery All 120 Auto Recovery All 120 Auto Recovery All 120 1. Add a 0.1uF Ceramic Capacitor and a 10uF Aluminum Electrolytic Capacitor to Output. CFM500S120 CFM500S240 CFM500S240 2. Nobient Temperature=25°C CFM500S120 CFM500S240 CFM500S240 3. Output is max. Load CFM500S360 CFM500S240	Vn=Nominal Vn, lo=lo max., To=25°C. CFM500S120 CFM500S180 11.88 17.82 18 18.18 Vn=Nominal Vn, lo=lo max., To=25°C. CFM500S180 CFM500S240 23.76 24 24.24 CFM500S180 35.64 36 36.36 36.36 CFM500S120 41.67 27.78 24 24.24 CFM500S120 21.752 48 48.48 CFM500S120 21.76 24 24.24 CFM500S120 41.67 27.78 27.78 CFM500S180 27.78 27.78 27.78 CFM500S480 10.42 20.83 10.42 Vn=115Vac All 16 10.42 Vn=High Line to Low Line All ±1.0 ±0.5 CFM500S120 16 CFM500S120 16 CFM500S120 CFM500S120 16 33 Latch Off (AC Recycle to Reset) CFM500S120 35 6 Auto Recovery All 120 190 4 Auto Recovery All 120 150



PARAMETER	NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
		CFM500S120		91.5		
	Output is Rated Load	CFM500S180		92.5		
Efficiency	Ambient Temperature=25°C	CFM500S240		93		%
	@ Input Voltage is 230VAC	CFM500S360		94.5		
		CFM500S480		94		
	Power on		0		2	Vdc
	Power off (PS-ON and GND open)			4		vuc
PS-On Signal	Power on (PS-ON and GND short)	All		10		~^^
	Power-off (PS-ON and GND open)			0		mA
	1. Input voltage is 90VAC~264VAC					
Power Good (PG)	2. Output is max. load	All	100		500	ms
	3. The TTL goes high after power set up					
	1. Input voltage is 90VAC~264VAC					
Power Fail (PF)	2. Output is max. load	All	1	10		ms
	3. The TTL goes low before Vo below 90% rated value	,		.0		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
Input to Output	1 minute	All			4000	Vac
Isolation Resistance	Input to Output	All	100			MΩ

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
Switching Frequency	Pout=max. rated power	All		65		kHz
Output Voltage adjustment		All	-5		+5	%

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Тур.	Max.	Units
MTBF	I_=100%; T_=25 $^\circ\!\!\!\mathrm{C}$ per MIL-HDBK-217F	All		200		K hours
Humidity	Nom-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5,Table 516.5-1 10ms, each axis 3 times(±X \ ±Y \ ±Z axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII,15~2000Hz, X·Y·Z axis, 1 hour (each axis),. Total 3 hrs.	All		4		g
Weight	Open Frame Versions	All		515		~
Weight	Covered Versions	All	635			g
2	Open Frame	All		000x1.540 76.20x39.1		
Dimensions	C (with Cover)	All	5.354x3.425x1.673 Inches (136.00x87.00x42.50mm)			
Safety	Class I, IEC/EN/UL62368-1					
EMC Emission	EN55032:2015+AC:2016, EN61204-3:2000, E EN61000-6-4:2007+A1:2011, 47 CFR FCC Pa			+AC:2012	' Clas	s B
Conducted Disturbance	EN55032, 47 CFR FCC Part 15 Subpart B (Cl	1	(,		Clas	s B
Radiated Disturbance	EN55032, 47 CFR FCC Part 15 Subpart B (CI	ass B)			Clas	s B
Harmonic Current Emissions	EN61000-3-2:2014				Clas	s A,C,D
Voltage Fluctuations & Flicker	EN61000-3-3:2013					
EMC Immunity	EN55035:2017, EN61204-3:2000, EN61000-6	-1:2019+CRGD:	2019, EN6	1000-6-2:2	019	
Electrostatic Discharge (ESD)	IEC61000-4-2:2008, Air Discharge: ±8kV, Contact Discharge: ±4kV				Crite	rion A
Radio-Frequency, Continuous Radiated Disturbance	IEC61000-4-3:2006+A1:2007+A2:2010					erion A
Electrical Fast Transient (EFT)	IEC61000-4-4:2012, ±1kV, ±2kV				Crite	rion A
Surge	IEC61000-4-5:2014+A1:2017, L-N: ±0.5kV, ±1kV, L-E(Ground): ±0.5kV, ±1kV, ±2kV			Crite	rion A	

www.cincon.com




GENERAL SPECIFICATIONS

Conducted Disturbances, Induced by RF Fields	IEC61000-4-6:2013+COR1:2015	Criterion A
Power Frequency Magnetic Field	IEC61000-4-8:2009	Criterion A
Voltage Dips	IEC61000-4-11:2004+A1:2017, Dip: 30% Reduction, Dip >95% Reduction	Criterion A
Voltage Interruptions	IEC61000-4-11:2017+A1:2017, >95% Reduction	Criterion B
Application Note Link	CFM500S S	eries App Notes

CHARACTERISTIC CURVE


Power Derating Curve

Forced Air Flow

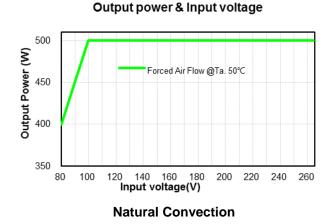


Forced Air Flow


Output power vs Ambient Temperature

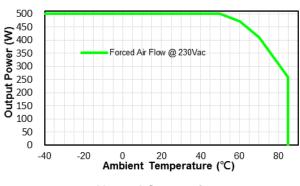


Natural Convection

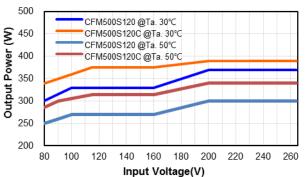



Output power & Input Voltage




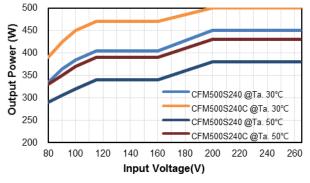

Output power vs Ambient Temperature

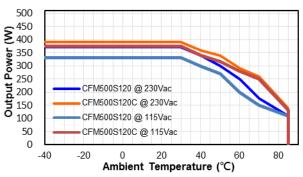




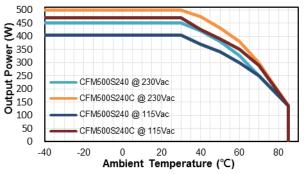




Conduction Convection with External Baseplate (48x24.8x0.12cm)


Output power & Input Voltage

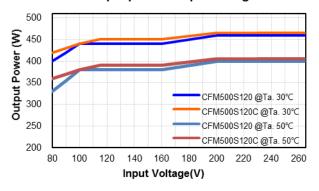


Output power & Input Voltage

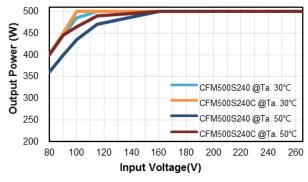

Performance Data

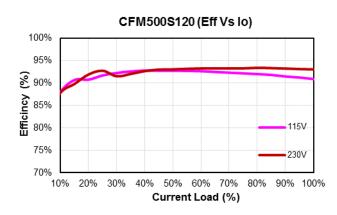

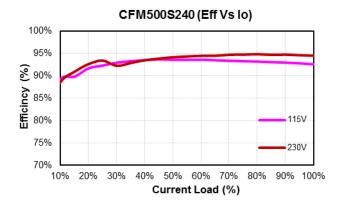



CFM500S Series **Conduction Convection with External Baseplate** (48x24.8x0.12cm)


Output power vs Ambient Temperature

500 (Å 450 400 350 300 250 150 100 450 CFM500S120 @ 230Vac CFM500S120C @ 230Vac 100 CFM500S120 @ 115Vac 50 CFM500S120C @ 115Vac 0 -40 -20 0 20 40 60 80 Ambient Temperature (°C)

Output power vs Ambient Temperature

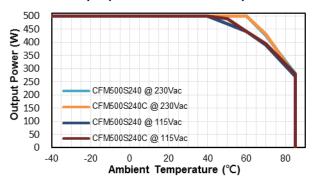

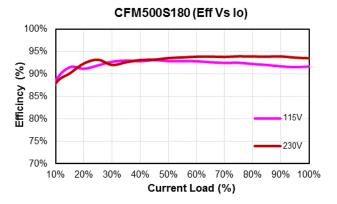


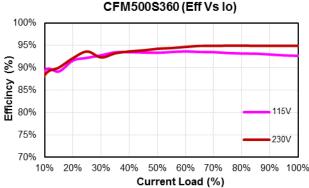


CFM500S360 (Eff Vs Io)




CFM500S480 (Eff Vs Io)

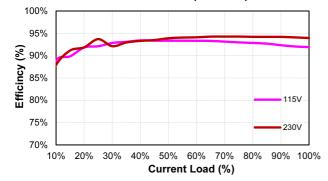



MECHANICAL SPECIFICATION

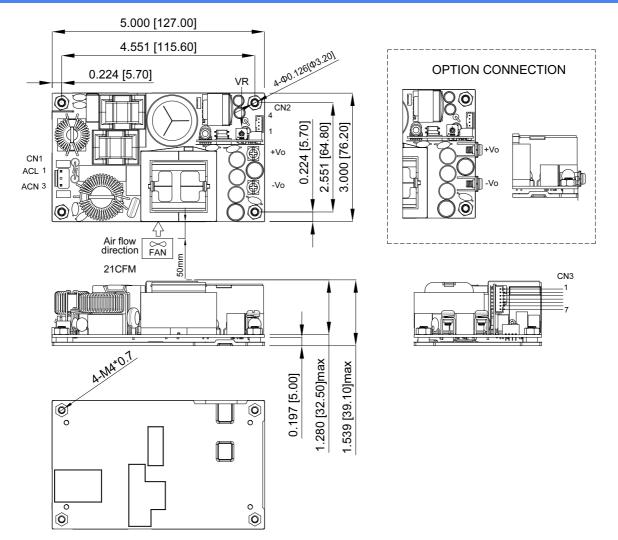



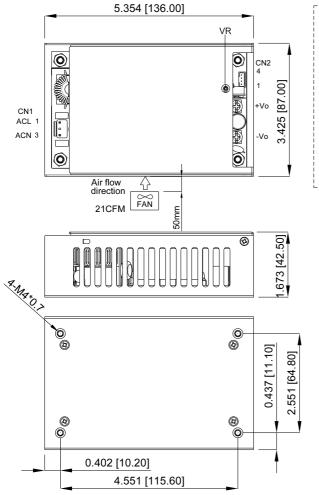





CN1: PIN CONNECTION Pin Function 1 ACL 2 -3 ACN CN2: PIN CONNECTION Pin Function

	1 dilotion
1	GND
2	+5VSB
3	GND
4	+12V-FAN

CN3: PIN CONNECTION

NNECTION
Function
GND
PF
FAN-EN
PS-ON
-Sense
+Sense
OPTION

All Dimensions In Inches[mm] Tolerance Inches:x.xxx= ± 0.02 Millimeters: x.xx = ± 0.5

CINCON Electronics Co. Ltd. Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan Tel: 886-2-27086210 Fax: 886-2-27029852 E-mail: sales@cincon.com.tw Web: www.cincon.com.tw

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cincon:

<u>CFM500S120</u> <u>CFM500S120C</u> <u>CFM500S180</u> <u>CFM500S180C</u> <u>CFM500S240C</u> <u>CFM500S240C</u> <u>CFM500S360C</u> <u>CFM500S480</u> <u>CFM500S480C</u>