

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com


**AXIAL LEADED HERMETICALLY SEALED HIGH
VOLTAGE STANDARD RECOVERY RECTIFIER DIODE****QUICK REFERENCE
DATA**

- High thermal shock resistance
- Hermetically sealed with Metoxillite fused metal oxide
- Multi-junction construction
- Low reverse leakage currents
- Subminiature body size

- $V_R = 2\text{kV} - 3\text{kV}$
- $I_F = 600\text{mA}$
- $t_{rr} = 2.5\mu\text{s}$
- $I_R = 1.0\mu\text{A}$

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	1N3645 SM20	1N3646 SM25	1N3647 SM30	Unit
Working reverse voltage	V_{RWM}	2000	2500	3000	V
Repetitive reverse voltage	V_{RRM}	2000	2500	3000	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	← 600 →			mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	I_{FRM}	← 2.5 →			A
Non-repetitive surge current ($t_p = 8.3\text{ms}$, @ V_R & T_{jmax})	I_{FSM}	← 14 →			A
Storage temperature range	T_{STG}	← -65 to +175 →			°C
Operating temperature range	T_{OP}	← -65 to +175 →			°C

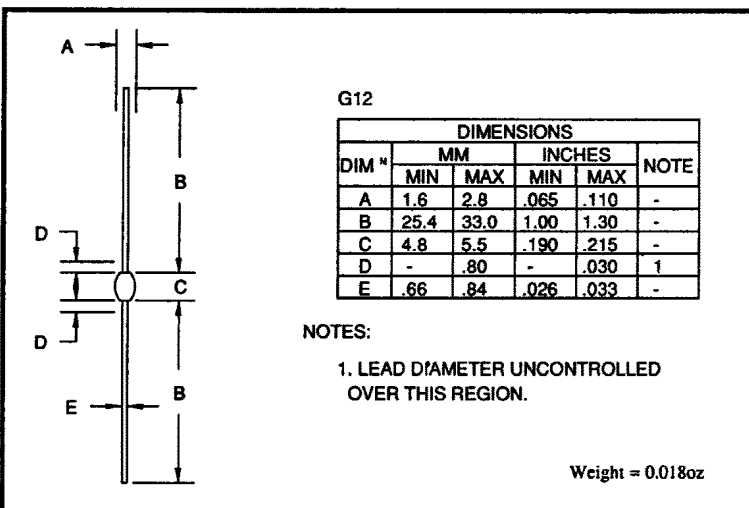MECHANICAL

These products are qualified to MIL-S-19500/279 and are preferred parts as listed in MIL-STD-701.

They can be supplied fully released as JAN and JANTX versions.

These products are available in Europe to DEF STAN 59-61 (PART 80)/034.

January 7, 1998

CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	1N3645 SM20	1N3646 SM25	1N3647 SM30	Unit
Average forward current for sine wave - max. pcb mounted - max. in unstirred oil	$I_F(AV)$ $I_F(AV)$	← 260 → ← 600 →			mA mA
I^2t for fusing (t = 8.3ms) max.	I^2t	← 0.026 →			A ² S
Forward voltage drop max. @ $I_F = 250mA$, $T_j = 25^\circ C$	V_F	← 5.00 →			V
Reverse current max. @ V_{RWM} , $T_j = 25^\circ C$ @ V_{RWM} , $T_j = 100^\circ C$	I_R I_R	← 1.00 → ← 20.0 →			μA μA
Reverse recovery time max. 50mA I_F to 100mA I_R . Recover to 25mA I_{RR} .	t_{rr}	← 2.5 →			μS
Junction capacitance typ. @ $V_R = 5V$, f = 1MHz	C_j	← 8.0 →			pF
Thermal resistance - junction to oil Unstirred @ 55°C Stirred @ 55°C	$R_{\theta JO}$ $R_{\theta JO}$	← 30.0 → ← 18.0 →			°C/W °C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	$R_{\theta JA}$	← 90.0 →			°C/W

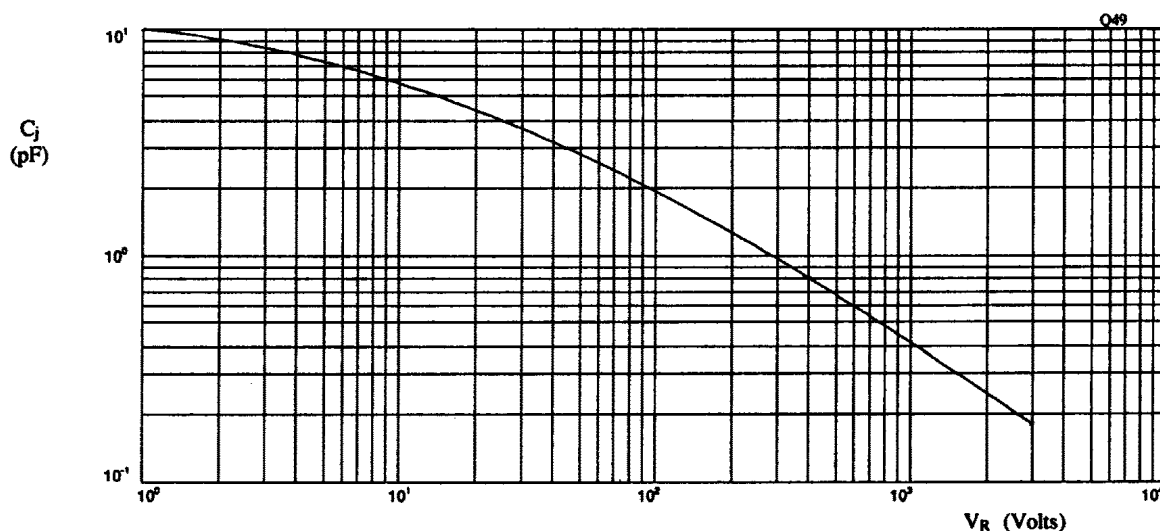


Fig 1. Typical junction capacitance as a function of reverse voltage.

January 7, 1998

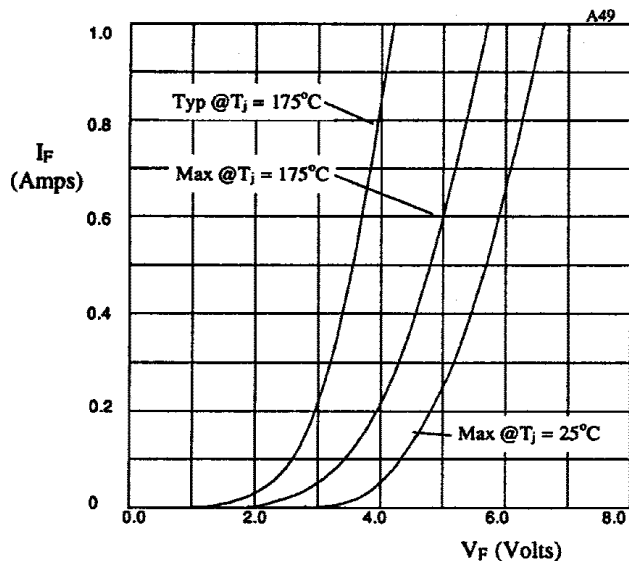


Fig 2. Forward voltage drop as a function of forward current.

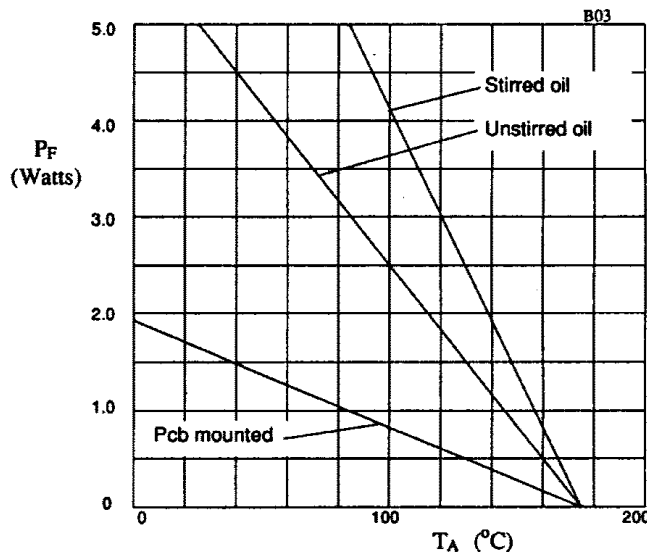


Fig 3. Power derating in oil and air.

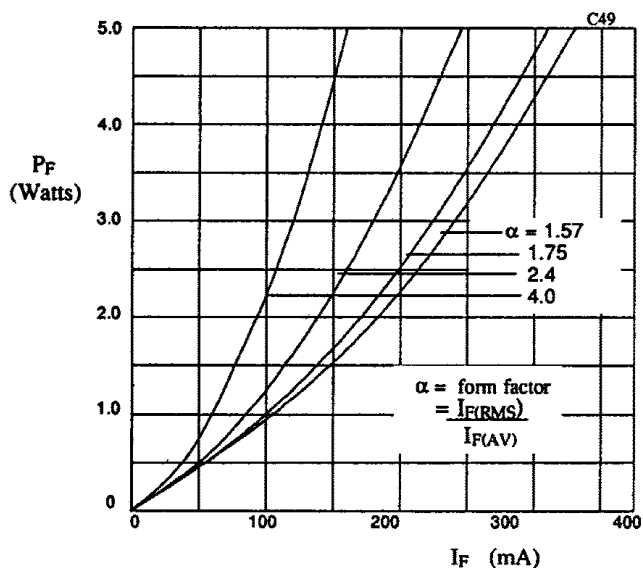


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

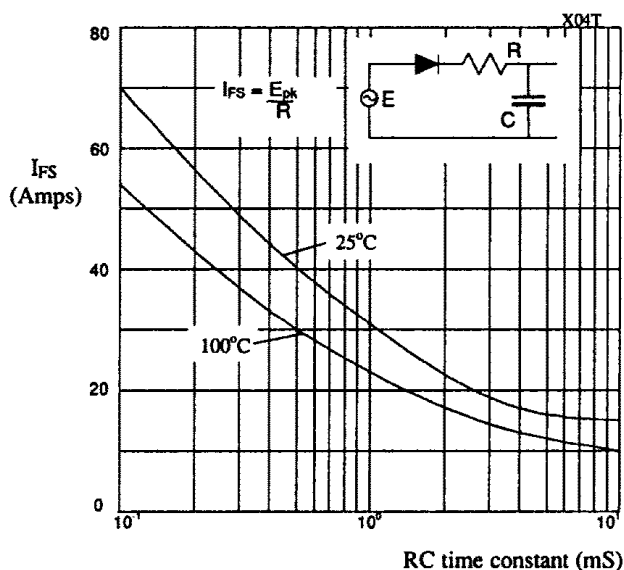


Fig 5. Maximum ratings for capacitive loads.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[1N3647](#) [1N3645](#) [1N3646](#) [SM20](#) [SM25](#) [SM30](#)