

Low-Power, USB 2.0 High-Speed Switch

■ Features

- Super high bandwidth (-3 dB): 2.0 GHz
- V_{CC} operation at 2.7 V to 5.5 V
- Low C_{ON} : 3 pF (typ.)
- Low R_{ON} : 6 Ω (typ.)
- Low power consumption: 1 μ A (max.)
- Low I_{CCT} : 4 μ A (typ.) at $V_{IN} = 1.8$ V, $V_{CC} = 3.6$ V
- ± 6 kV HBM ESD
- Power-off / on protection on common ports

■ Applications

- Telematics control units
- Automotive cluster displays
- Front and rear cameras

■ Package Information

Part Number	Package	Body Size
DIO32320	MSOP-10	3.0 mm $\times$ 4.9 mm
	QFN-10	1.4 mm $\times$ 1.8 mm
	QFN-10	1.4 mm $\times$ 1.2 mm

■ Description


The DIO32320 is a low-power, dual SPDT2-port high-speed analog switch. It handles bidirectional signal flow optimized for switching a high-speed (480 Mbps) source or a full-speed (12 Mbps) source.

The DIO32320 has a high channel-to-channel noise isolation and a low bit-to-bit skew which allows it to pass high-speed differential signals with good signal integrity. Each switch offers little or no attenuation of the high-speed signals at the outputs.

The DIO32320 contains special circuitry on the D+/D- pins, which can tolerate up to 5.5 V when the USB devices are either powered off or powered on.

The DIO32320 is available in three types of Green packages: QFN1.4*1.8-10, MSOP-10, and QFN1.4*1.2-10.

■ Simplified Schematic

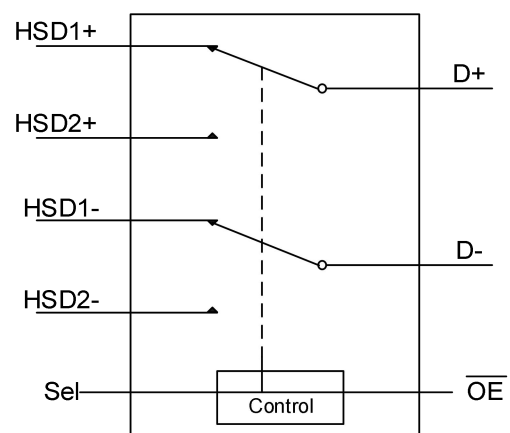

■ Ordering Information

Ordering Part No.	Top Marking	MSL	RoHS	T _A	Package	
DIO32320MP10	DIO3232	3	Green	-40 to 85°C	MSOP-10	Tape & Reel, 3000
DIO32320LP10	YW3A	1	Green	-40 to 85°C	QFN1.4*1.8-10	Tape & Reel, 3000
DIO32320LN10	BC2V	1	Green	-40 to 85°C	QFN1.4*1.2-10	Tape & Reel, 5000

If you encounter any issue in the process of using the device, please contact our customer service at marketing@dioo.com or phone us at (+86)-21-62116882. If you have any improvement suggestions regarding the datasheet, we encourage you to contact our technical writing team at docs@dioo.com. Your feedback is invaluable for us to provide a better user experience.

Table of Contents

1. Pin Assignment and Functions	1
2. Absolute Maximum Ratings	2
3. Recommended Operating Conditions	2
4. ESD Ratings	2
5. Electrical Characteristics	3
5.1. DC electrical characteristics	3
5.2. AC electrical characteristics	4
5.3. Capacitance	4
6. Typical Characteristics	5
7. Block Diagram	7
8. Physical Dimensions	8
8.1. QFN1.4*1.8-10	8
8.2. MSOP-10	9
8.3. QFN1.4*1.2-10	10

List of Figures

Figure 1. MSOP-10 (Top view)	1
Figure 2. QFN1.4*1.8-10 (Top view)	1
Figure 3. QFN1.4*1.2-10 (Top view)	1
Figure 4. Gain vs. frequency	5
Figure 5. 480 Mbps with USB switch in signal path	5
Figure 6. Supply current vs. Logic level	5
Figure 7. Off-isolation vs. frequency	5
Figure 8. On-resistance vs. Input voltage	5
Figure 9. Crosstalk vs. frequency	5
Figure 10. Switch on resistor	6
Figure 11. Switch off leakage	6
Figure 12. Channel on / off capacitance	6
Figure 13. Bandwidth	6
Figure 14. Channel-to-channel crosstalk	6
Figure 15. Off-isolation	6
Figure 16. Break-before-make	7
Figure 17. Turn-on / Turn-off	7

List of Tables

Table 1. Pin descriptions	1
Table 2. Truth table	1

1. Pin Assignment and Functions

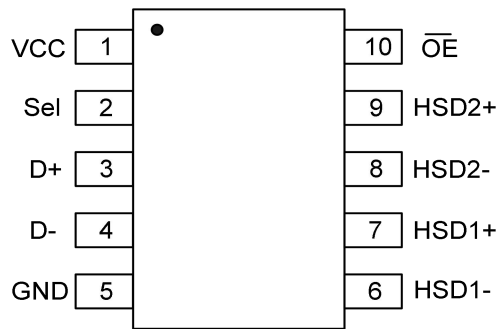


Figure 1. MSOP-10 (Top view)

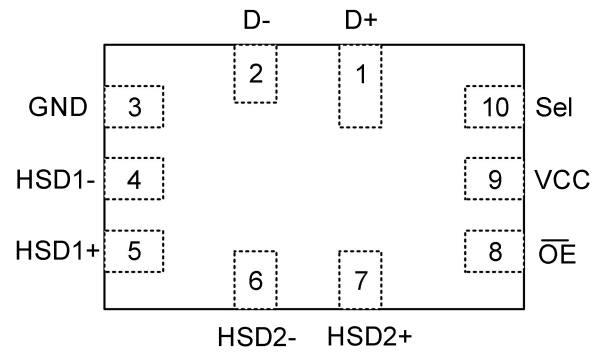


Figure 2. QFN1.4*1.8-10 (Top view)

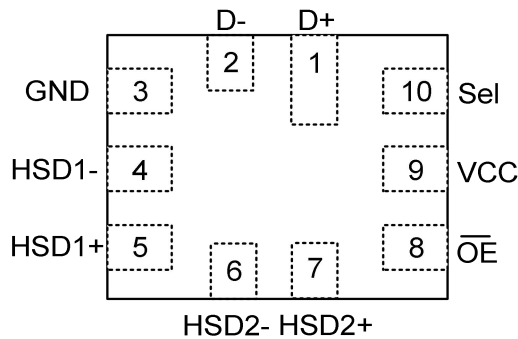


Figure 3. QFN1.4*1.2-10 (Top view)

Table 1. Pin descriptions

Pin Name	Description
$\overline{\text{OE}}$	Switch enable
Sel	Switch selection
D+, D-	USB data bus
HSD1±, HSD2±	Multiplexed source inputs
VCC	Power supply

Table 2. Truth table

Sel	$\overline{\text{OE}}$	Function
X	H	Disconnect
L	L	D+, D- = HSD1+, HSD1-
H	L	D+, D- = HSD2+, HSD2-

2. Absolute Maximum Ratings

Exceeding the maximum ratings listed under Absolute Maximum Ratings when designing is likely to damage the device permanently. Do not design to the maximum limits because long-time exposure to them might impact the device's reliability. The ratings are obtained over an operating free-air temperature range unless otherwise specified.

Symbol	Parameter	Min	Max	Unit
V_{CC}	Supply voltage	-0.3	6.0	V
V_{CNTRL}	DC input voltage(S, /OE)	-0.3	V_{CC}	V
V_{SW}	DC input I/O voltage	-0.3	$V_{CC} + 0.3$	V
	DC input I/O voltage (D+/D-)	-0.3	$V_{CC} + 0.3$	V
I_{IK}	DC input diode current	-50		mA
I_{OUT}	DC output current		50	mA
T_{STG}	Storage temperature	-65	150	°C

3. Recommended Operating Conditions

Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. The ratings are obtained over an operating free-air temperature range unless otherwise specified.

Symbol	Parameter	Min	Max	Unit
V_{CC}	Supply voltage	2.7	5.5	V
V_{CNTRL}	Control input voltage (S,/OE)	0	V_{CC}	V
V_{SW}	Switch I/O voltage (HSD1±, HSD2±)	0	V_{CC}	V
	Switch I/O voltage (D+, D-)	0	V_{CC}	V
T_A	Operating temperature	-40	85	°C

4. ESD Ratings

When a statically-charged person or object touches an electrostatic discharge sensitive device, the electrostatic charge might be drained through sensitive circuitry in the device. If the electrostatic discharge possesses sufficient energy, damage might occur to the device due to localized overheating.

Model	Condition	Value	Unit
Human-body model	JEDEC: JESD22-A114	±6000	V

5. Electrical Characteristics

5.1. DC electrical characteristics

All typical value are at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Symbol	Parameter	Conditions	V_{CC} (V)	Min	Typ	Max	Unit
V_{IH}	Input voltage high		3.0 to 3.6	1.2			V
V_{IL}	Input voltage low		3.0 to 3.6			0.6	V
I_{IN}	Control input leakage	$V_{SW} = 0$ to V_{CC}	3.6	-1		1	μA
I_{OZ}	Off state leakage	$0 \leq D_n, \text{HSD1n}, \text{HSD2n} \leq 3.6$ V	3.6	-1		1	μA
I_{OFF}	Power-off leakage current (all common ports)	$V_{SW} = 0$ V to 3.6 V, see Figure 11	0	-2		2	μA
R_{ON}	HS switch on resistance	$V_{SW} = 0.4$ V, $I_{ON} = 8$ mA, see Figure 10	3.0		6	8	Ω
ΔR_{ON}	HS delta R_{ON}	$V_{SW} = 0.4$ V, $I_{ON} = 8$ mA	3.0		0.05		Ω
I_{CC}	Quiescent supply current	$V_{CNTRL} = 0$ or V_{CC}	3.6			1	μA
I_{CCT}	Increase in I_{CC} current per control voltage and V_{CC}	$V_{CNTRL} = 2.6$ V	3.6		0.2		μA
		$V_{CNTRL} = 1.8$ V	3.6		4		μA

Note:

(1) Specifications subject to change without notice.

5.2. AC electrical characteristics

All typical value are for $V_{CC} = 3.3\text{ V}$ at 25°C unless otherwise specified.

Symbol	Parameter	Conditions	V_{CC} (V)	Temp($^\circ\text{C}$)	Min	Typ	Max	Unit
t_{ON}	Turn-on time S, /OE to output	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, $V_{SW} = 0.8\text{ V}$, see Figure 17	3.0 to 3.6	full		35		ns
t_{OFF}	Turn-off time S, /OE to output	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, $V_{SW} = 0.8\text{ V}$, see Figure 17	3.0 to 3.6	full		5		ns
t_{PD}	Propagation delay	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$	3.3	25°C		0.25		ns
				full			5.0	ns
t_{BBM}	Break-before-make	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, $V_{SW} = 0.8\text{ V}$, see Figure 16	3.0 to 3.6	25°C		12		ns
				full	10		28	ns
OIRR	Off isolation	$R_L = 50\ \Omega$, $f = 240\text{ MHz}$ see Figure 15	3.0 to 3.6	25°C		-37		dB
X_{TALK}	Non-adjacent channel crosstalk	$R_L = 50\ \Omega$, $f = 240\text{ MHz}$ see Figure 14	3.0 to 3.6	25°C		-45		dB
BW	-3dB bandwidth	$R_L = 50\ \Omega$, $C_L = 0\text{ pF}$, see Figure 13	3.0 to 3.6	25°C		2000		MHz
		$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$, see Figure 13		25°C		720		MHz
$t_{SK(P)}$	Skew of opposite transitions of the same output	$R_L = 50\ \Omega$, $C_L = 5\text{ pF}$	3.0 to 3.6	25°C		20		ps

Note:

(1) Specifications subject to change without notice.

5.3. Capacitance

Symbol	Parameter	Conditions	Temp($^\circ\text{C}$)	Min	Typ	Max	Unit
C_{IN}	Control pin input capacitance	$V_{CC} = 0\text{ V}$	25°C		1.2		pF
C_{ON}	D+/D- on capacitance	$V_{CC} = 3.3\text{ V}$, /OE = 0 V, $f = 240\text{ MHz}$, see Figure 12	25°C		3		
C_{OFF}	HSD1n, HSD2n off capacitance	V_{CC} and /OE = 3.3 V, see Figure 12	25°C		2		

Note:

(1) Specifications subject to change without notice.

6. Typical Characteristics

$T_A = 25^\circ\text{C}$, $V_{CC} = 3.3\text{ V}$, unless otherwise specified.

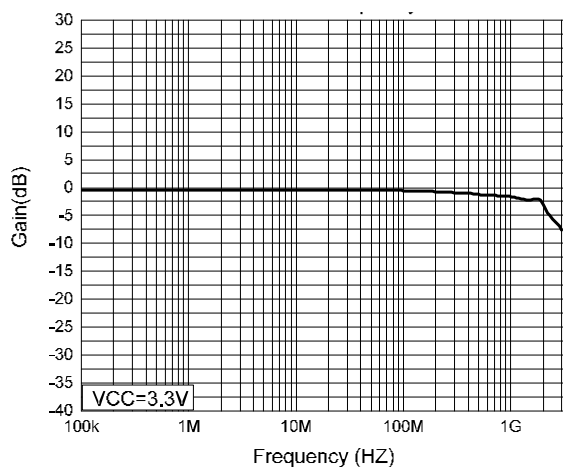


Figure 4. Gain vs. Frequency

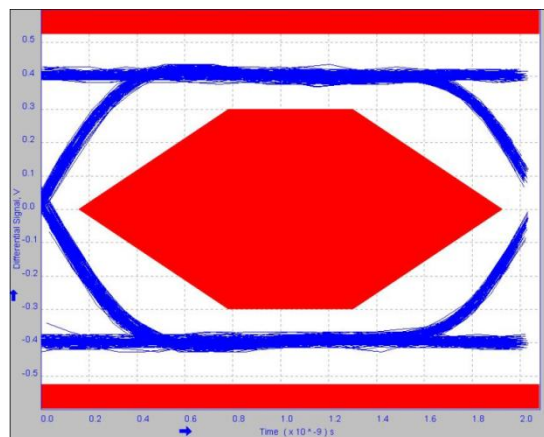


Figure 5. 480 Mbps with USB switch in signal path

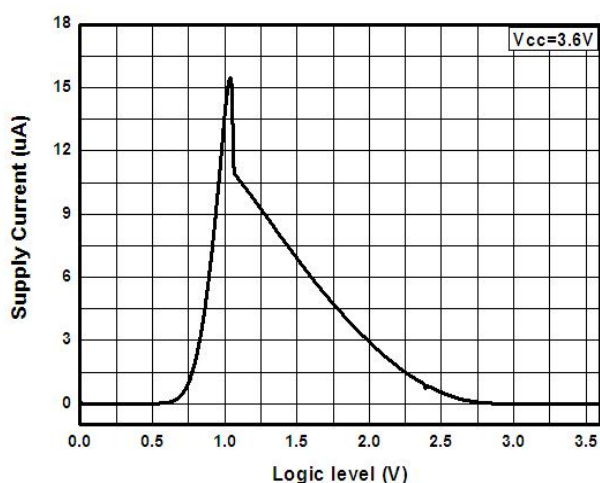


Figure 6. Supply current vs. Logic level

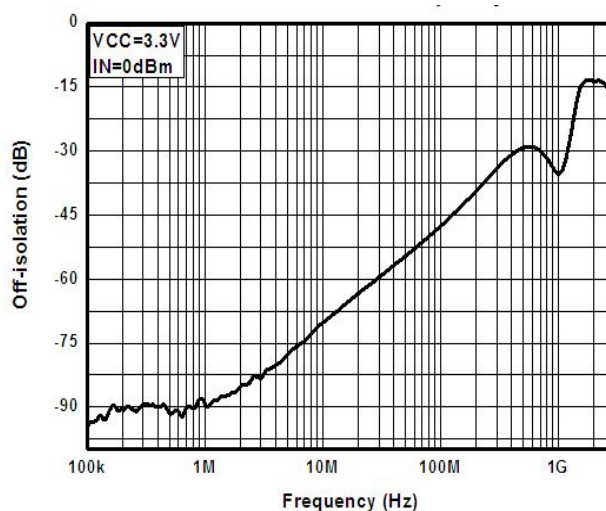


Figure 7. Off-isolation vs. Frequency

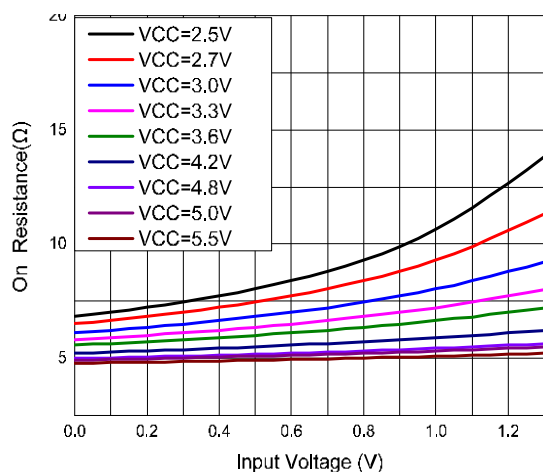


Figure 8. On-resistance vs. Input voltage

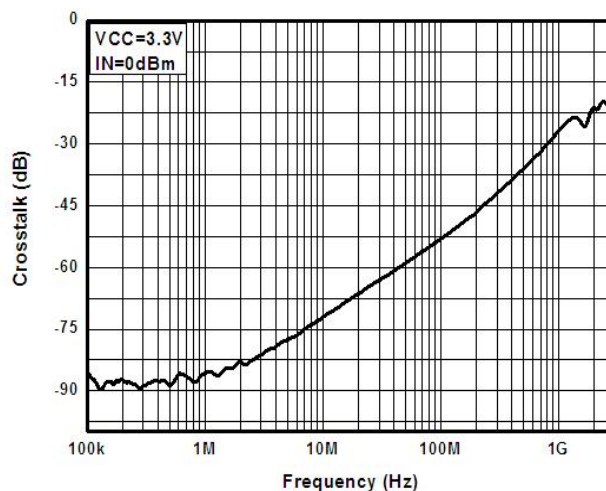


Figure 9. Crosstalk vs. Frequency

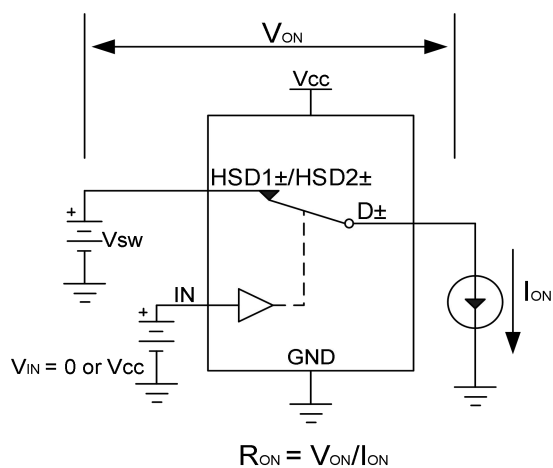


Figure 10. Switch on resistor

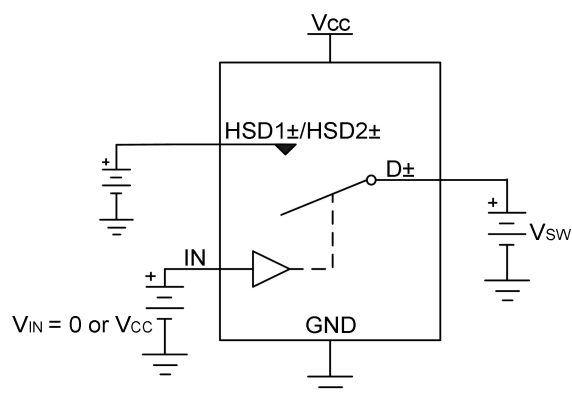


Figure 11. Switch off leakage

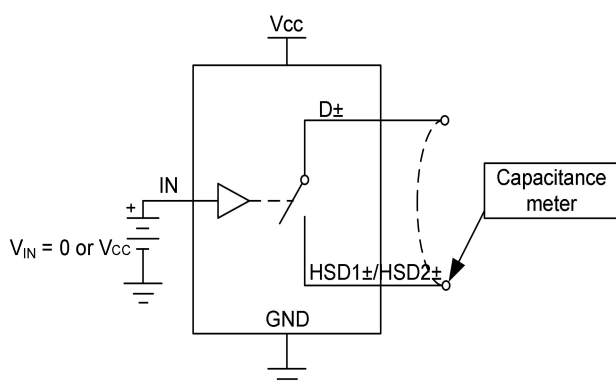


Figure 12. Channel on / off capacitance

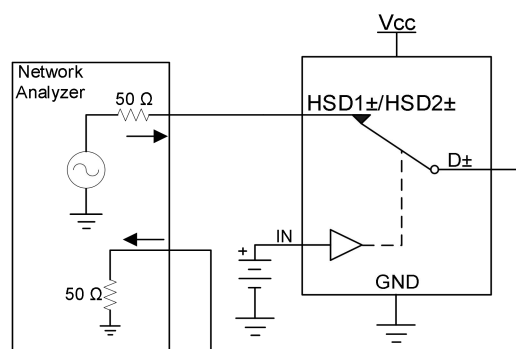


Figure 13. Bandwidth

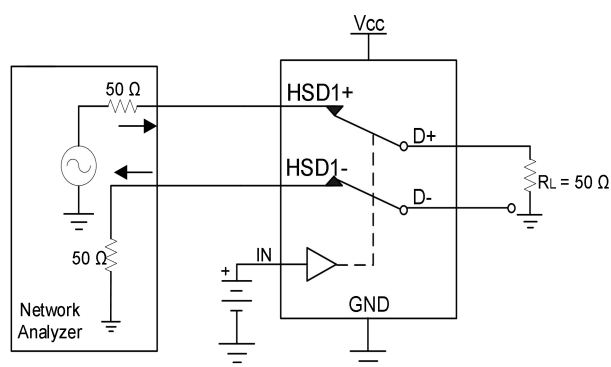


Figure 14. Channel-to-channel crosstalk

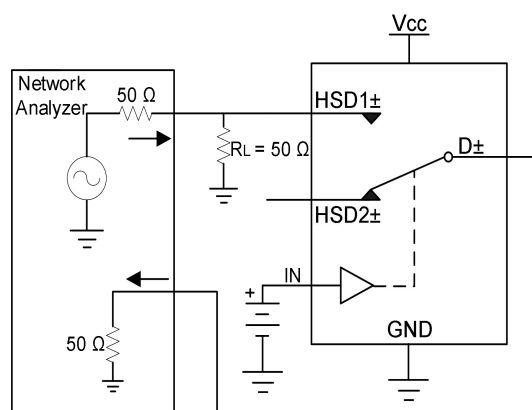


Figure 15. Off-isolation

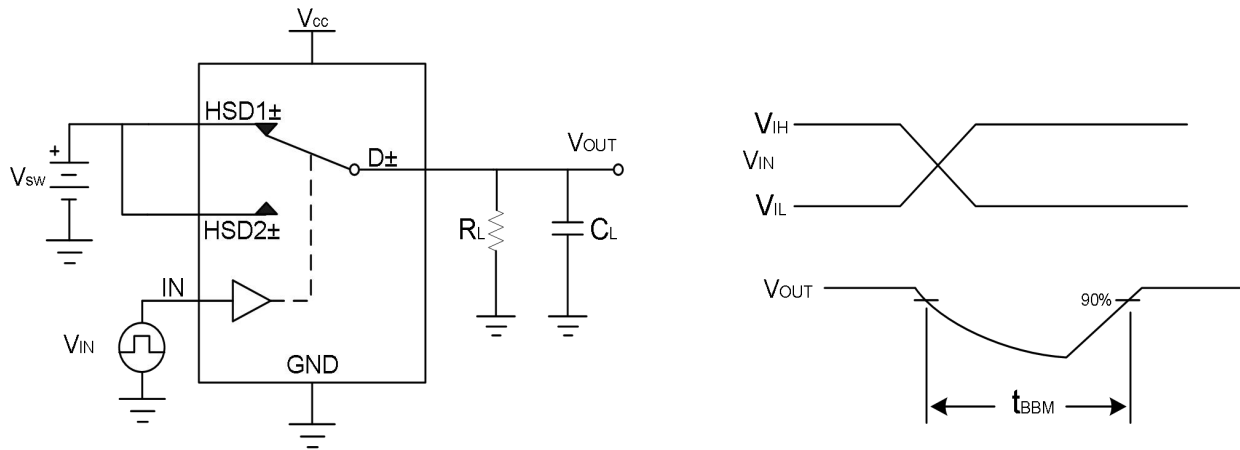


Figure 16. Break-before-make


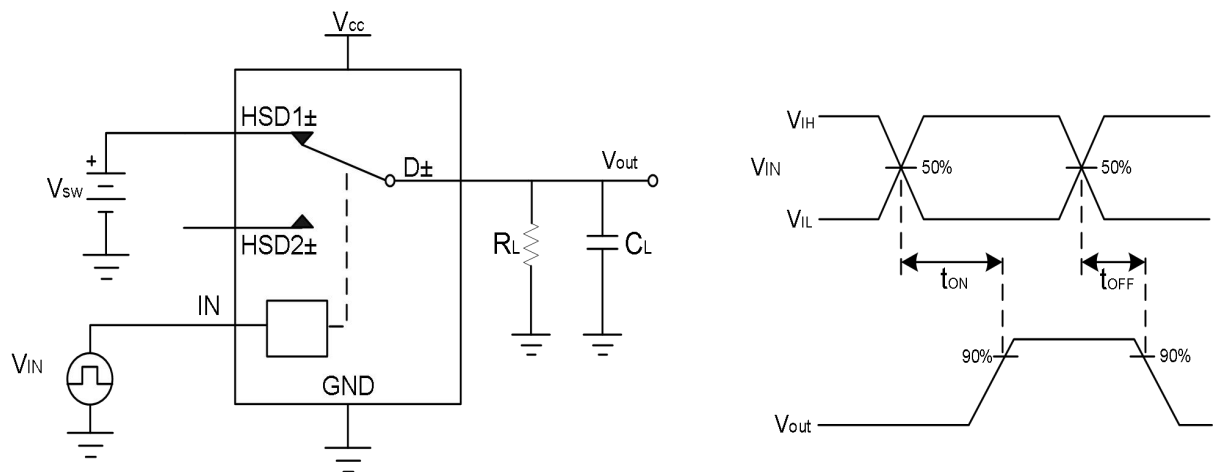



Figure 17. Turn-on / Turn-off

7. Block Diagram

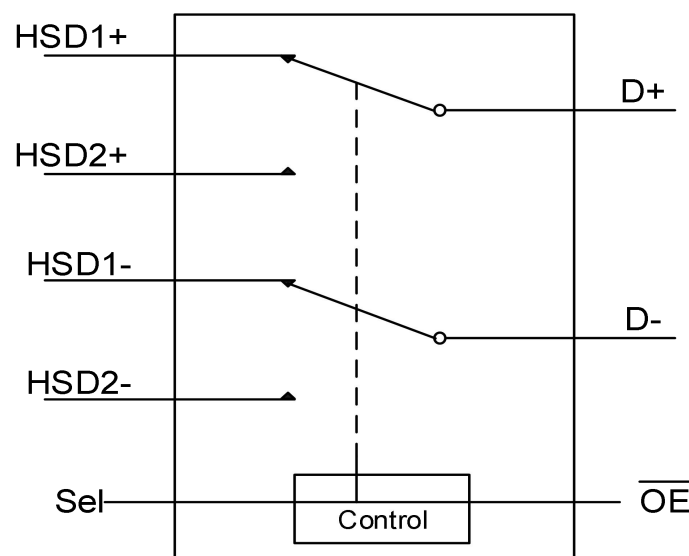

8. Physical Dimensions


8.1. QFN1.4*1.8-10

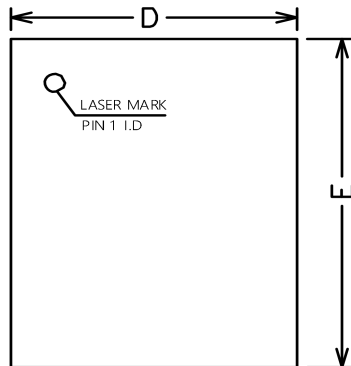

TOP VIEW





SIDE VIEW

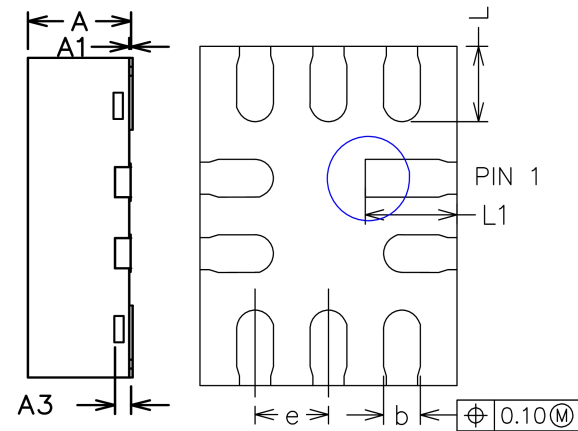

SIDE VIEW


BOTTOM VIEW

Two options

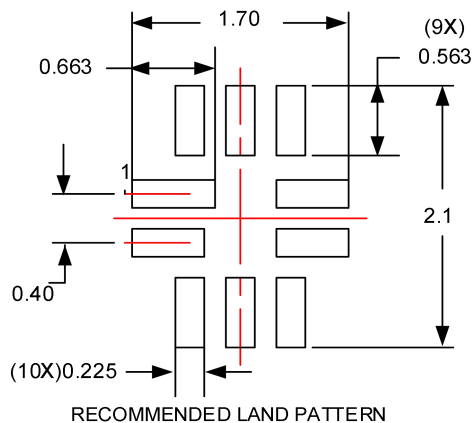




Common Dimensions (Units of measure = Millimeter)			
Symbol	Min	Nom	Max
A	0.50	0.55	0.60
A1	0.00	0.02	0.05
A3	0.152 REF		
b	0.15	0.20	0.25
D	1.30	1.40	1.50
E	1.70	1.80	1.90
e	0.30	0.40	0.50
L	0.35	0.40	0.45
L1	0.45	0.50	0.55

8.2. MSOP-10

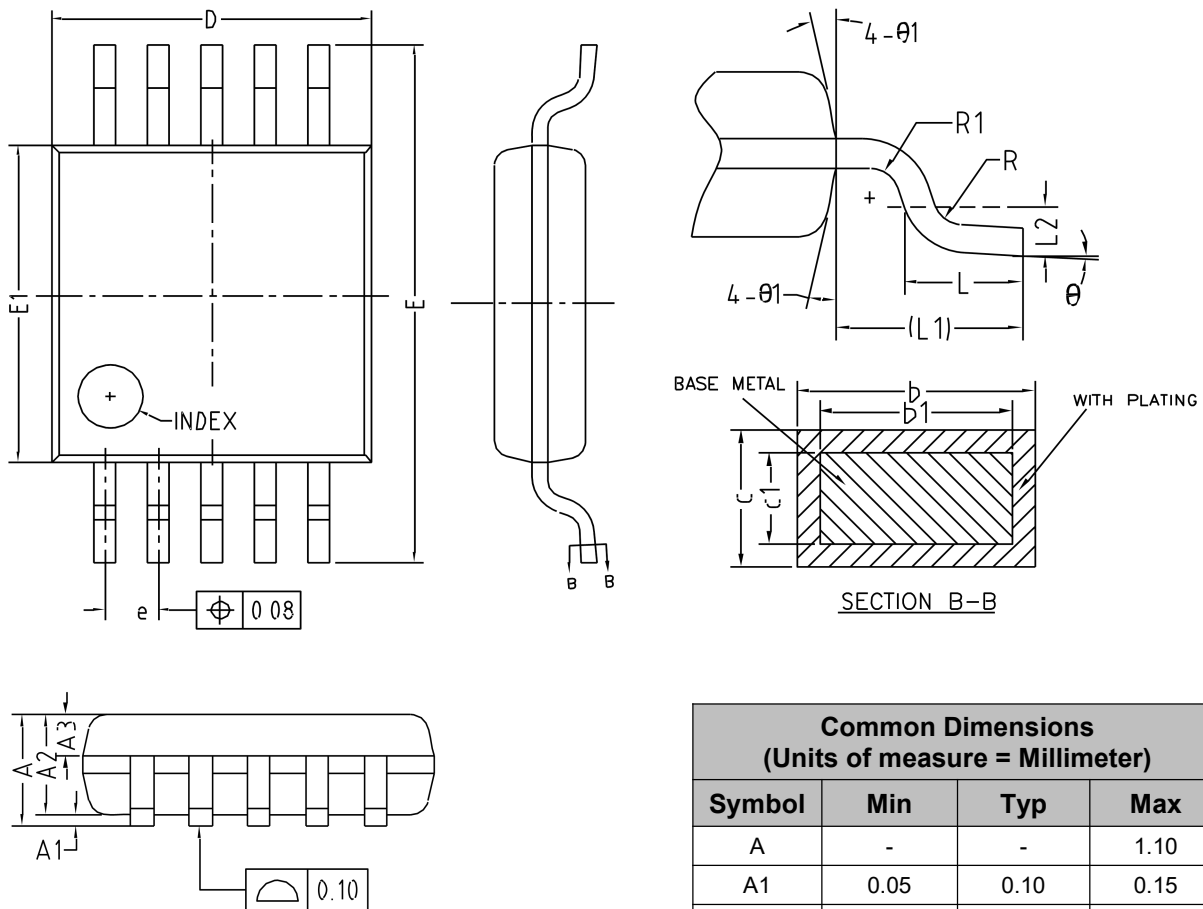

Common Dimensions (Units of measure = Millimeter)			
Symbol	Min	Typ	Max
A	-	-	1.10
A1	0.05	0.10	0.15
A2	0.75	0.85	0.95
A3	0.30	0.35	0.40
b	0.18	-	0.27
b1	0.17	0.20	0.23
c	0.15	-	0.20
c1	0.14	0.15	0.16
D	2.90	3.00	3.10
E	4.75	4.90	5.05
E1	2.90	3.00	3.10
e	0.40	0.50	0.60
L	0.40	0.55	0.70
L1	0.95 REF		
L2	0.25 BSC		
R	0.07	-	-
R1	0.07	-	-
θ	0°	-	8°
θ1	9°	12°	15°

8.3. QFN1.4*1.2-10

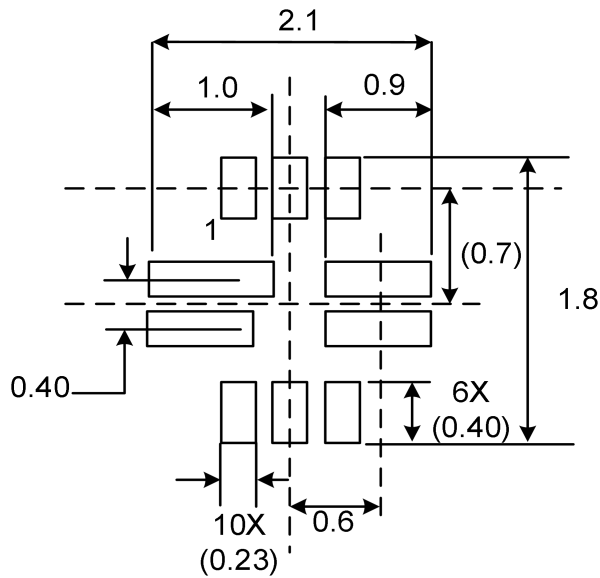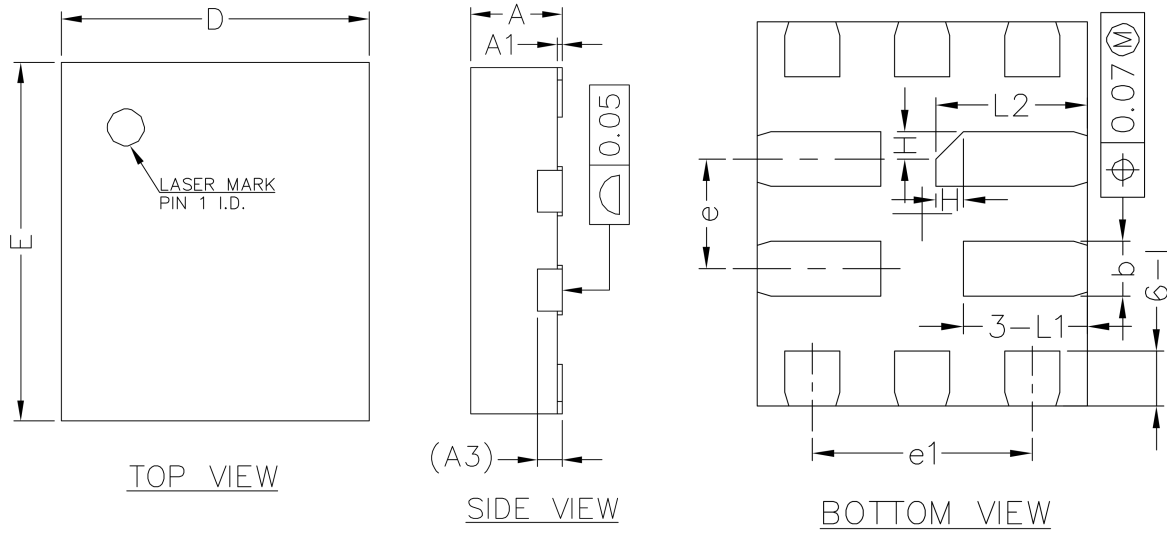

RECOMMENDED LAND PATTERN

Common Dimensions (Units of Measure = Millimeter)			
Symbol	Min	Typ	Max
A	0.34	0.37	0.40
A1	0.00	0.02	0.05
A3	0.10 REF		
b	0.15	0.20	0.25
D	1.15	1.20	1.25
E	1.35	1.40	1.45
e	0.35	0.40	0.45
e 1	0.80 REF		
L	0.15	0.20	0.25
L1	0.40	0.45	0.50
L2	0.50	0.55	0.60
H	0.10 REF		

Disclaimer

This specification and information contained herein are provided on an “AS IS” basis and WITH ALL FAULTS. All product specifications, statements, information, and data (collectively, the “Information”) in this datasheet or made available on the website of www.dioo.com are subject to change without notice. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to his/her application. All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, express or implied.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[DIOO:](#)

[DIO32320LN10](#)