

## SUCOFLEX<sup>®</sup> 526S Microwave Cable Assembly



## Description

SUCOFLEX 526S microwave cable assemblies set a new measurement standard through 26.5 GHz.

- Excellent return- and insertion loss
- · Phase and amplitude stability with flexure and movement
- Torque, crush and kink resistance
- Precise and repeatable measurements
- Long service life
- Reduce total cost of test with durable, reliable performance



### **Product Configuration**

Description	SF526S/11PC35/11PC35/36in
Item number	85088164
Cable type	SUCOFLEX 526S
Length of assembly	914 mm (36 inch)
Connector A	11_PC3.5 (straight male)
Connector B	11_PC3.5 (straight male)

## **Technical Data**

## Mechanical Data

Outer diameter	7.7 mm
Min. bending radius	25.4 mm
Weight	149 g
Crush resistance	26 kgf /cm

#### Environmental Data

Operating temperature	-55 + 125°C
RoHS, REACH	Compliant


### **Electrical Data**

Impedance	50 Ω
Operating frequency	up to 26.5 GHz
Velocity of propagation	77 %
Time delay	4.3 ns / m
Typical return loss	-25.0 dB
Min. return loss	-19.0 dB
Typical insertion loss	1.51 dB
Max. insertion loss	1.64 dB
Screening effectiveness	> 90 dB
Typ. amplitude stability vs. shaking	± 0.05 dB
Typ. amplitude stability vs. bending	± 0.05 dB
Typ. phase stability vs. bending	± 3.0°


# **Data sheet**



## SUCOFLEX<sup>®</sup> 526S Microwave Cable Assembly

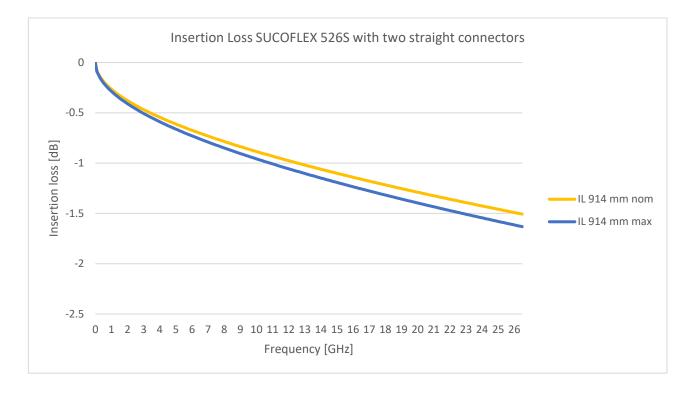

Connector 11\_PC3.5 (straight male)

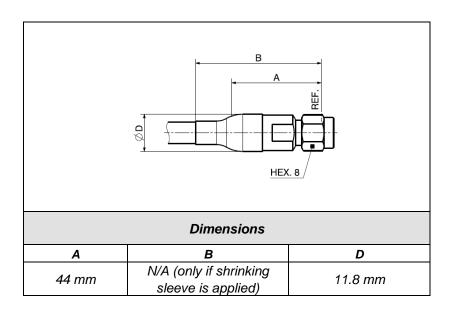

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 und IRIS

www.hubersuhner.com

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HUBER+SUHNER: SF526S/11PC35/11PC35/36in