


ASSEMBLY NO.	DIM. "L"	2.0 GHz		12.4 GHz		18.0 GHz	
		VSWR	I.L. dB	VSWR	I.L. dB	VSWR	I.L. dB
minibend LSR-2.5	2.50 (63.5)	1.25:1	0.19	1.30:1	0.39	1.45:1	0.57
minibend LSR-3	3.00 (76.2)	1.25:1	0.20	1.30:1	0.43	1.45:1	0.61
minibend LSR-3.5	3.50 (88.9)	1.25:1	0.21	1.30:1	0.47	1.45:1	0.65
minibend LSR-4	4.00 (101.6)	1.25:1	0.23	1.30:1	0.50	1.45:1	0.68
minibend LSR-4.5	4.50 (114.3)	1.25:1	0.24	1.30:1	0.53	1.45:1	0.72
minibend LSR-5	5.00 (127.0)	1.25:1	0.25	1.30:1	0.56	1.45:1	0.76
minibend LSR-5.5	5.50 (139.7)	1.25:1	0.26	1.30:1	0.59	1.45:1	0.79
minibend LSR-6	6.00 (152.4)	1.25:1	0.28	1.30:1	0.62	1.45:1	0.83
minibend LSR-6.5	6.50 (165.1)	1.25:1	0.29	1.30:1	0.65	1.45:1	0.87
minibend LSR-7	7.00 (177.8)	1.25:1	0.30	1.30:1	0.68	1.45:1	0.90
minibend LSR-8	8.00 (203.2)	1.25:1	0.32	1.30:1	0.74	1.45:1	0.98
minibend LSR-9	9.00 (228.6)	1.25:1	0.35	1.30:1	0.81	1.45:1	1.05
minibend LSR-10	10.00 (254.0)	1.25:1	0.37	1.30:1	0.87	1.45:1	1.12
minibend LSR-11	11.00 (279.4)	1.25:1	0.40	1.30:1	0.93	1.45:1	1.20
minibend LSR-12	12.00 (304.8)	1.25:1	0.42	1.30:1	0.99	1.45:1	1.27
minibend LSR-13	13.00 (330.2)	1.25:1	0.44	1.30:1	1.05	1.45:1	1.34
minibend LSR-14	14.00 (355.6)	1.25:1	0.47	1.30:1	1.11	1.45:1	1.42
minibend LSR-15	15.00 (381.0)	1.25:1	0.49	1.30:1	1.18	1.45:1	1.49
minibend LSR-16	16.00 (406.4)	1.25:1	0.52	1.30:1	1.24	1.45:1	1.56
minibend LSR-							

NOTES:

- DESCRIPTION:
CABLE ASSEMBLY, SMA PLUG
TO SMP FEMALE, RUGGEDIZED
- CABLE,
COAXIAL CABLE H+S Astrolab P/N 32024E
MEETS OR EXCEEDS MIL-DTL-17
SEE H+S Astrolab CONTROL DRAWING
FOR MATERIALS AND FINISHES.
- CONNECTOR -A-, SMA PLUG:
H+S Astrolab P/N 29094CR-32-24
INTERFACE DIMENSIONS IAW MIL-STD-348.
SEE H+S Astrolab CONTROL DRAWING
FOR MATERIALS AND FINISHES.
- CONNECTOR -B-, SMP FEMALE:
H+S Astrolab P/N 29473CR-32-24-1
INTERFACE DIMENSIONS IAW MIL-STD-348.
SEE H+S Astrolab CONTROL DRAWING
FOR MATERIALS AND FINISHES.
- MARKING:
LOOSE, WHITE SLEEVING CAPTIVATED ON THE CABLE ASSEMBLY.
MARKING WILL INCLUDE THE H+S Astrolab PART NUMBER, CAGE CODE
AND DATE CODE OF DATE OF MANUFACTURE. OTHER MARKING
AS DEFINED BY CUSTOMER.
NO MARKING ON CABLE ASSEMBLIES SHORTER
THAN 3.0", MARKING ON PACKING ONLY.
- ELECTRICAL CHARACTERISTICS:
IMPEDANCE,
50.0 Ohms NOMINAL.
FREQUENCY, INSERTION LOSS AND VSWR
SEE CHART.
- MECHANICAL:
OPERATING TEMPERATURE RANGE,
-55° C TO +125° C.
PULL STRENGTH TO 25.0 LBS. [111 N].


CONTROL DRAWING

minibend LSR-XX

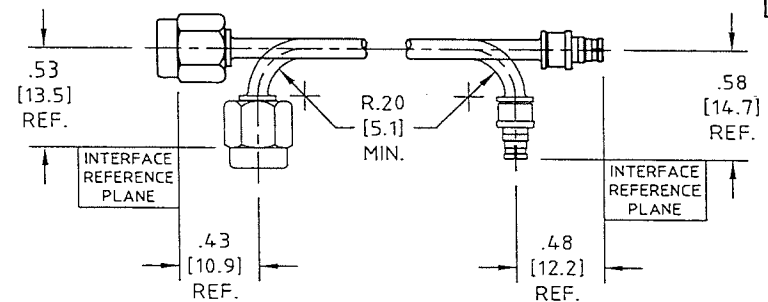

SHOWN ABOVE IS TYPICAL INSTALLATION.

ROHS 5/6 COMPLIANT

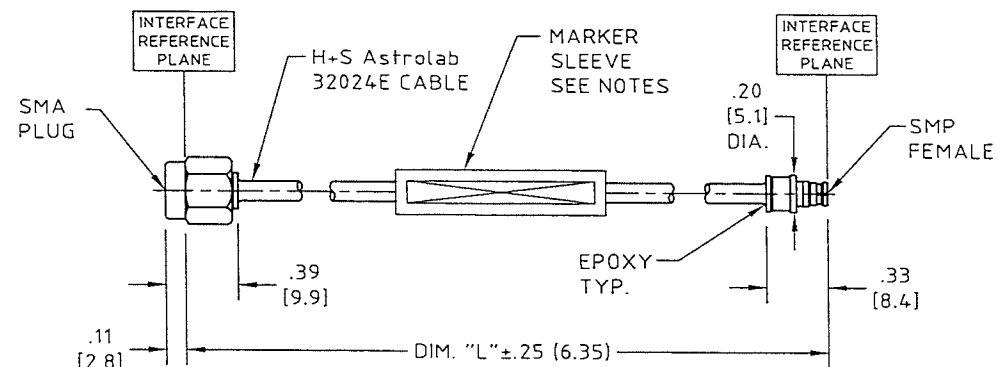

NAME		DATE	 HUBER+SUHNER Astrolab	
PREP.	EF	07/31/02		
ELEC.				
MECH.				
Q.C.				
THIS DRAWING CONTAINS PATENTABLE AND PROPRIETARY INFORMATION. THE DESIGN CANNOT BE USED WITHOUT WRITTEN PERMISSION OF HUBER - SUHNER ASTROLAB.				
TITLE				
CABLE ASSEMBLY, minibend L TYPE, SMA PLUG TO SMP FEMALE, RUGGEDIZED				
THDS. TO BE IN ACCORD WITH U.S. DEPT. OF COMM. SCREW THD. STDS. FOR FEDERAL SERVICES 1950 SUPL. TO HANDBOOK H 28.	SCALE	CODE IDENT.	DWG NO.	REV
	1:1	16301	minibend LSR-XX	L

L	COMPANY LOGO UPDATE	01/15/13	EENG 2	
REV.	DESCRIPTION	DATE	BY	APPROVED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HUBER+SUHNER:

[MINIBENDLSR-6](#) [MINIBENDLSR-8](#) [MINIBENDLSR-11](#) [MINIBENDLSR-10](#) [MINIBENDLSR-12](#) [MINIBENDLSR-16](#)
[MINIBENDLSR-13](#) [MINIBENDLSR-14](#) [MINIBENDLSR-7](#) [MINIBENDLSR-9](#) [MINIBENDLSR-5](#) [MINIBENDLSR-2.5](#)
[MINIBENDLSR-3](#) [MINIBENDLSR-4](#) [MINIBEND LSR-6](#) [MINIBEND LSR-10](#) [MINIBEND LSR-12](#) [MINIBEND LSR-13](#)
[MINIBEND LSR-14](#) [MINIBEND LSR-16](#) [MINIBEND LSR-9](#) [MINIBEND LSR-2.5](#) [MINIBEND LSR-3](#) [MINIBEND LSR-4](#)
[MINIBEND LSR-5](#) [MINIBEND LSR-7](#) [MINIBEND LSR-8](#)