


CONTROL DRAWING

MICROBEND MTVR-xx

B

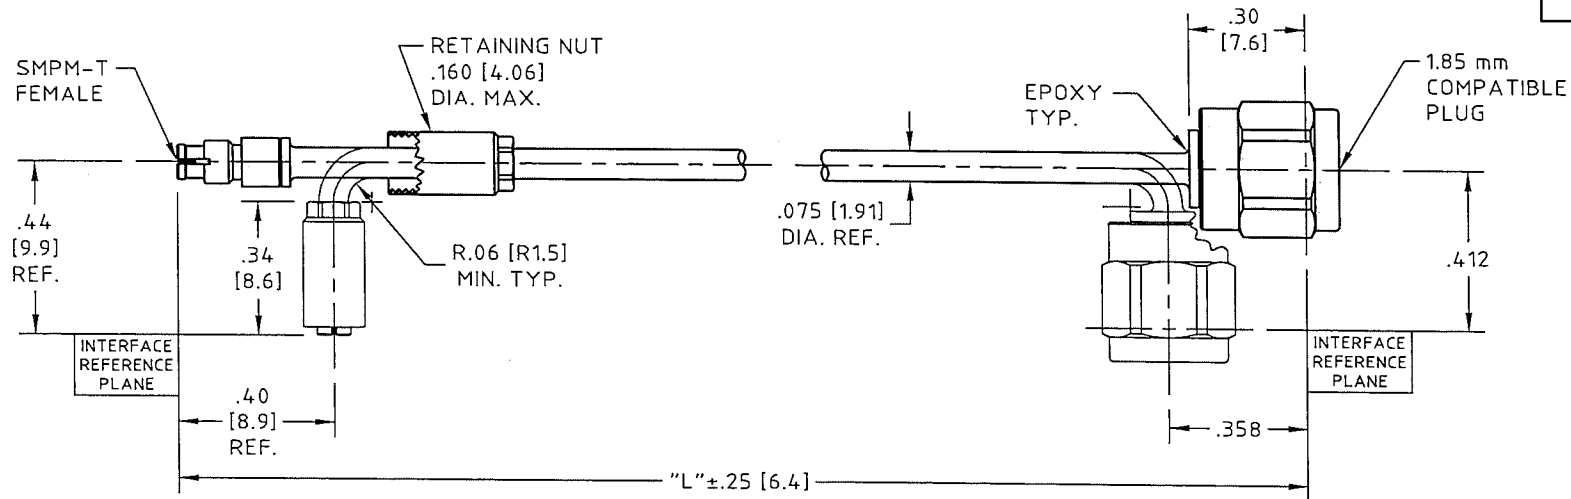

ROHS 5/6 COMPLIANT

H+S Astrolab PART NUMBER	DIMENSION "L"	12.4 GHz		18.0 GHz		40.0 GHz		65.0 GHz	
		VSWR	I.L. dB	VSWR	I.L. dB	VSWR	I.L. dB	VSWR	I.L. dB
microbend MTVR-2.5	2.50 (63.5)	1.33:1	0.51	1.40:1	0.62	1.60:1	1.07	1.80:1	1.42
microbend MTVR-3	3.00 (76.2)	1.33:1	0.56	1.40:1	0.68	1.60:1	1.16	1.80:1	1.54
microbend MTVR-3.5	3.50 (88.9)	1.33:1	0.61	1.40:1	0.74	1.60:1	1.26	1.80:1	1.66
microbend MTVR-4	4.00 (101.6)	1.33:1	0.66	1.40:1	0.80	1.60:1	1.35	1.80:1	1.79
microbend MTVR-4.5	4.50 (114.3)	1.33:1	0.71	1.40:1	0.86	1.60:1	1.44	1.80:1	1.91
microbend MTVR-5	5.00 (127.0)	1.33:1	0.76	1.40:1	0.92	1.60:1	1.54	1.80:1	2.03
microbend MTVR-5.5	5.50 (139.7)	1.33:1	0.81	1.40:1	0.98	1.60:1	1.63	1.80:1	2.16
microbend MTVR-6	6.00 (152.4)	1.33:1	0.86	1.40:1	1.05	1.60:1	1.73	1.80:1	2.28
microbend MTVR-7	7.00 (177.8)	1.33:1	0.95	1.40:1	1.17	1.60:1	1.91	1.80:1	2.53
microbend MTVR-8	8.00 (203.2)	1.33:1	1.05	1.40:1	1.29	1.60:1	2.10	1.80:1	2.77
microbend MTVR-9	9.00 (228.6)	1.33:1	1.15	1.40:1	1.41	1.60:1	2.29	1.80:1	3.02
microbend MTVR-10	10.00 (254.0)	1.33:1	1.25	1.40:1	1.53	1.60:1	2.48	1.80:1	3.27
microbend MTVR-11	11.00 (279.4)	1.33:1	1.35	1.40:1	1.65	1.60:1	2.66	1.80:1	3.51
microbend MTVR-12	12.00 (304.8)	1.33:1	1.45	1.40:1	1.77	1.60:1	2.85	1.80:1	3.76
microbend MTVR-									

NOTES:

- DESCRIPTION,
CABLE ASSEMBLY, SMPM-T FEMALE TO 1.85mm PLUG.
THE SMPM-T THREADED CONNECTOR OFFERS THE
THE ADDITIONAL SECURITY OF A RETAINING NUT TO
ASSURE MATED CONDITION IN HI-REL ENVIRONMENTS.
THE CABLE ASSMBLY IS, RUGGEDIZED AND SUITABLE FOR
COMPLEX, CONGESTED INSTALLATIONS. WHEN INSTALLED
AND BENT AT THE MINIMUM BEND RADIUS, microbend MTVR
WILL TOLERATE MULTIPLE ±90° ROTATIONS AT THE CABLE
CONNECTOR JUNCTION.
- CABLE,
COAXIAL CABLE H+S Astrolab P/N 32041E.
(HIGH PERFORMANCE) astro - STEEL - flex I.
MEETS OR EXCEEDS MIL-DTL-17.
SEE H+S Astrolab CONTROL DRAWING
FOR MATERIALS AND FINISHES.
- CONNECTOR -A-, SMPM-T FEMALE:
H+S Astrolab P/N 29971TCR-32-41
IAW MIL-STD-348.
SEE H+S Astrolab CONTROL DRAWING
FOR MATERIALS AND FINISHES.

NOTES CONTINUED:

- CONNECTOR -B-, 1.85mm PLUG:
H+S Astrolab P/N 29890CR-32-41-2
SEE H+S Astrolab CONTROL DRAWING
FOR MATERIALS AND FINISHES.
- MARKING:
DIRECTLY ON CABLE, NONE.
ALL MARKING WILL BE DONE
ON PACKAGING.
- ELECTRICAL CHARACTERISTICS:
IMPEDANCE,
50.0 Ohms NOMINAL.
FREQUENCY, INSERTION LOSS AND
VSWR, SEE CHART.
- MECHANICAL:
OPERATING TEMPERATURE RANGE,
-55° C TO +125° C.
MECHANICAL PERFORMANCE,
GUARANTEED 10.0 LBS.
[45.0 N] PULL FORCE.

UNLESS OTHERWISE SPECIFIED
CONCENTRICITY .004 T.I.R.
CORNERS AND FILLETS .005
MAX. RADIUS OR CHAMFER.
SURFACE FINISH 63 RMS
MICROINCHES OR BETTER.

FRACTIONS	± 1/16
X	± .030
XX	± .015
XXX	± .005
ANGLES	± 1°
DO NOT SCALE DRAWING	

NAME	DATE	
PREP. EB	10/24/11	
ELEC.		
MECH.		
Q.C.		
TITLE		THIS DRAWING CONTAINS PATENTABLE AND PROPRIETARY INFORMATION. THE DESIGN CANNOT BE USED WITHOUT WRITTEN PERMISSION OF HUBER + SUHRNER ASTROLAB.

SMPM-T FEMALE TO 1.85mm PLUG

B	COMPANY LOGO UPDATED	01/15/13	GS	APPROVED	THOS. TO BE IN ACCORD WITH U.S. DEPT. OF COMM. SCREW THD. STDS. FOR FEDERAL SERVICES 1950 SUPPL. TO HANDBOOK H 28.	SCALE	CODE IDENT.	DWG NO.	REV
REV.	DESCRIPTION	DATE	BY	APPROVED	DO NOT SCALE DRAWING	2:1	16301	MICROBEND MTVR-xx	B

ENG 4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HUBER+SUHNER:

[MICROBENDMTVR-2.5](#) [MICROBENDMTVR-3](#) [MICROBENDMTVR-4](#) [MICROBENDMTVR-10](#) [MICROBENDMTVR-6](#)
[MICROBEND MTVR-10](#) [MICROBEND MTVR-2.5](#) [MICROBEND MTVR-3](#) [MICROBEND MTVR-4](#) [MICROBEND](#)
[MTVR-6](#)