

EMBEDDED QSEVEN


conga-QA7



- Qseven module based on Intel Atom® x6000E Series and Intel® Pentium® and Celeron® J and N Series processors
- High performance Intel® UHD Graphics for 10th Gen Intel® Processors
- LPDDR4x with up to 4.267 MT/s Memory Support
- Options for Time Sensitive Networking and Time Coordinated Computing for improved Realtime Capability
- Options for Industrial Temperature Range -40°C to 85°C

Form Factor	Qseven Form Factor Qseven Spec. Rev. 2.1 compliant					
CPU	Processor	TDP	Cores / Threads	Base Freq. / Turbo	Gfx EUs	Intel Use Condition
	J6413	10W	4 / 4	1.8 GHz / 3.0 GHz	16 EU	PC/Client
	J6426	10W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	PC/Client
	x6211E	6W	2 / 2	1.3 GHz / 3.0 GHz	16 EU	Embedded
	x6413E	9W	4 / 4	1.5 GHz / 3.0 GHz	16 EU	Embedded
	x6425E	12W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	Embedded
	x6212RE	6W	2 / 2	1.2 GHz / ---	16 EU	Industrial
	x6414RE	9W	4 / 4	1.5 GHz / ---	16 EU	Industrial
	x6425RE	12W	4 / 4	1.9 GHz / ---	32 EU	Industrial
DRAM	max. 16GB onboard LPDDR4x up to 4.267 MT/s					
Ethernet	GbE with TSN support real-time trigger					
I/O Interfaces	up to 2x USB 3.1 Gen2 up to 1x USB3.1 Dual Role up to 8x USB 2.0 2x SATA III SDIO 4x PCIe Gen3 I ² C Bus SMBus SPI (option) UART CAN LPC					
Mass Storage	eMMC 5.1 onboard flash up to 64GB (optional up to 128GB)					
Audio	Intel® High Definition Audio					
Graphics	High performance Intel® UHD Graphics for 10th Gen Intel® Processors					
LVDS	18/24-bit Single/Dual Channel LVDS Interface, resolutions up to 1920X1200@60Hz, VESA standard or JEIDA data mapping, Automatic Panel Detection via EDID/EPI shared with eDP 1.3 supporting up to 4096x2160@60Hz (option) or MIPI-DSI 1.2 supporting up to 3200x2000@60Hz (option)					
Digital Display Interface	Dual Mode DisplayPort 1.4 4096x2160@60Hz					
congatec Board controller	Multistage watchdog non-volatile user data storage manufacturing and board Information board statistics fast mode and multi-master I ² C bus power loss control					
Embedded BIOS Feature	AMI Aptio® UEFI firmware 32 MByte serial SPI with congatec Embedded BIOS features OEM Logo OEM CMOS Defaults LCD Control Display Auto Detection Backlight Control Flash Update					
Power Management	ACPI 5.0 compliant Smart Battery Management					
Operating Systems	Microsoft® Windows 11 IoT Enterprise Microsoft® Windows 10 Microsoft® Windows 10 IoT Enterprise Linux Yocto					
Hypervisor	RTS Real-Time Hypervisor					
Power Consumption	Typ. Application: see manual for full details					
Temperature Range	Commercial variants	Operation: 0° to +60°C		Storage: -20° to +80°C		
	Industrial variants	Operation: -40° to +85°C		Storage: -40° to +85°C		
Humidity	Operation 10 to 85% r. H. non cond. Storage 5 to 85% r. H. non cond.					
Size	70 x 70 mm					

conga-QA7 | Block Diagram

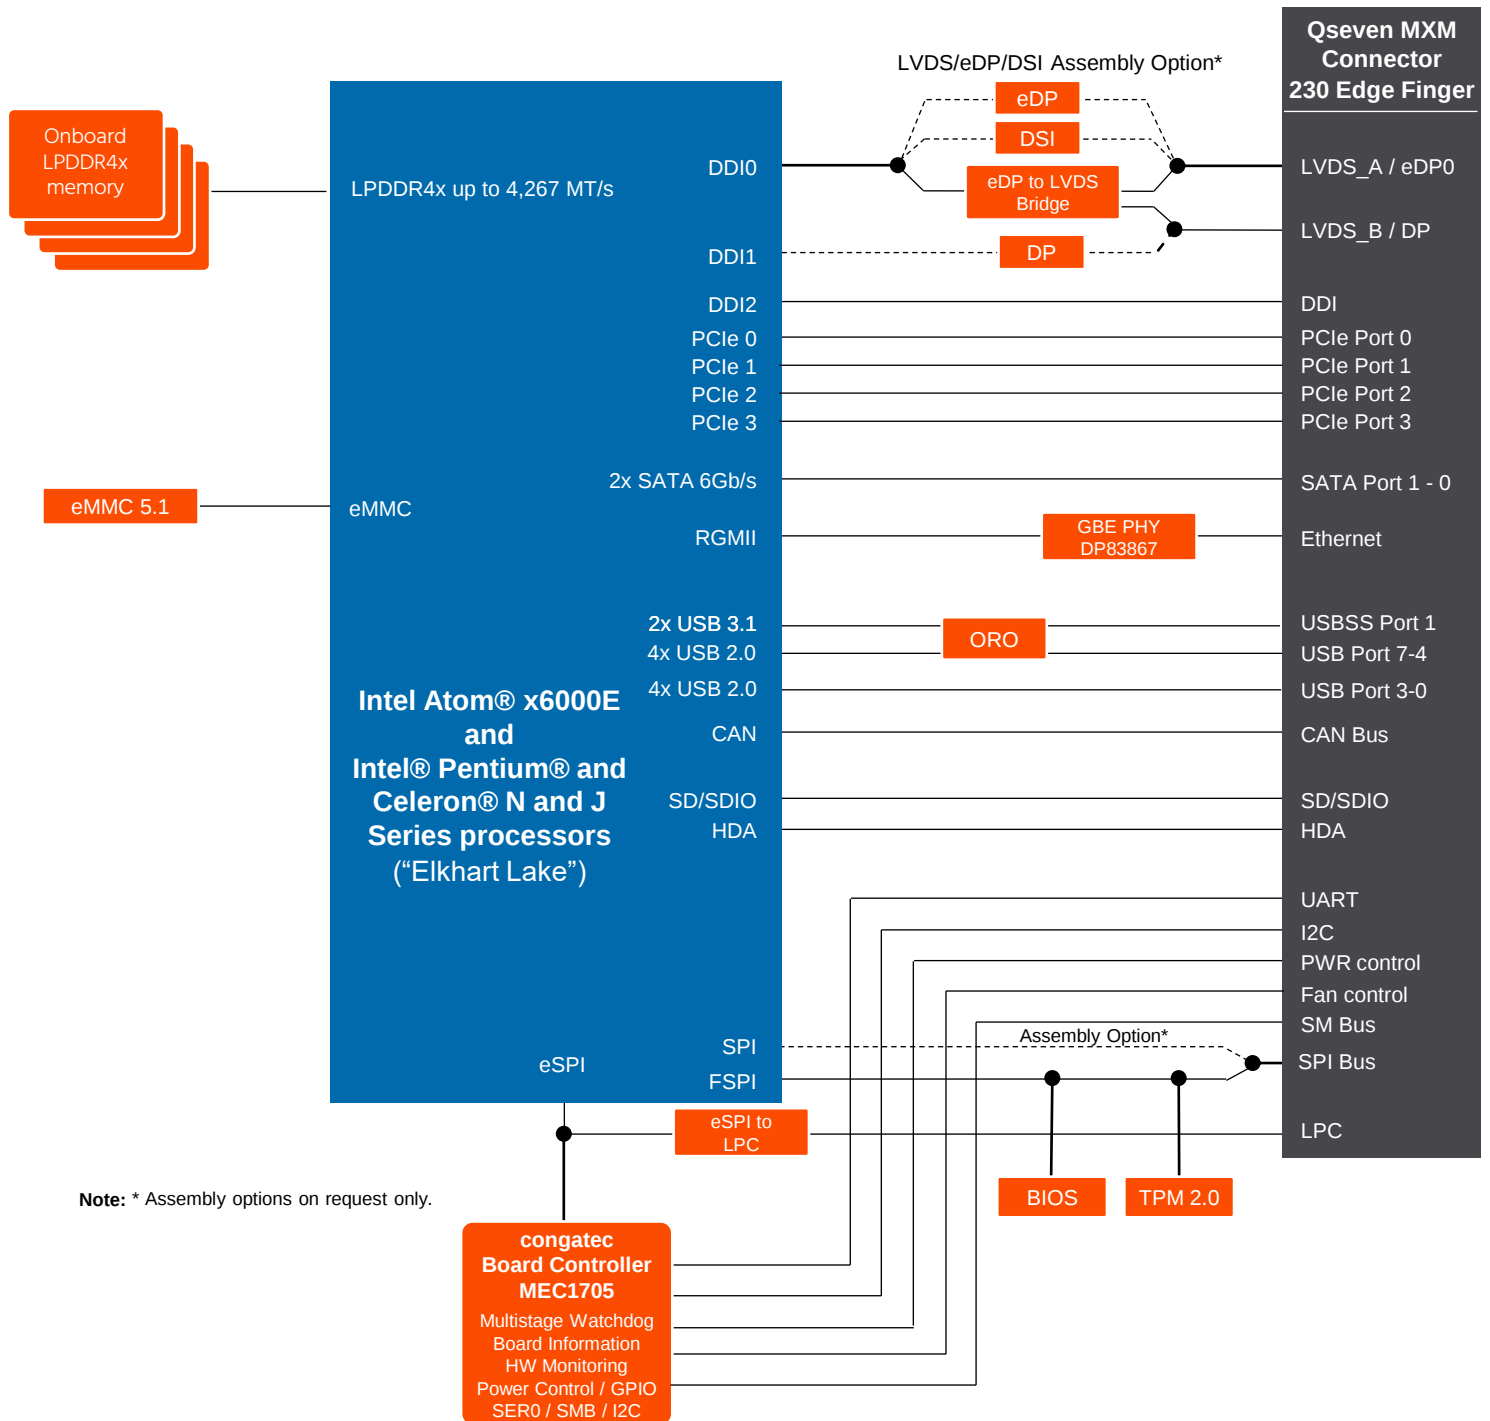

conga-QA7 | Order Information

Article	PN	Description
conga-QA7/x6425E-16G eMMC64	015800	Qseven module with Intel Atom® x6425E quad core processor with 2.0GHz core frequency up to 3.0GHz, 16GB 3200MT/s LPDDR4x onboard memory and 64GB eMMC 5.1 onboard flash.
conga-QA7/x6413E-8G eMMC32	015801	Qseven module with Intel Atom® x6413E quad core processor with 1.5GHz core frequency up to 3.0GHz, 8GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-QA7/x6211E-4G eMMC32	015802	Qseven module with Intel Atom® x6211E dual core processor with 1.3GHz core frequency up to 3.0GHz, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-QA7/i-x6425RE-8G eMMC32	015810	Qseven module with Intel Atom® x6425RE quad core processor with 1.9GHz core frequency, 8GB 4267MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-QA7/i-x6414RE-4G eMMC32	015811	Qseven module with Intel Atom® x6414RE quad core processor with 1.5GHz core frequency, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-QA7/i-x6212RE-4G eMMC32	015812	Qseven module with Intel Atom® x6212RE dual core processor with 1.2GHz core frequency, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-QA7/J6426-16G eMMC64	015820	Qseven module with Intel® Pentium® J6426 quad core processor with 2.0GHz core frequency up to 3.0GHz, 16GB 3200MT/s LPDDR4x onboard memory and 64GB eMMC 5.1 onboard flash.
conga-QA7/J6413-8G eMMC32	015821	Qseven module with Intel® Celeron® J6413 quad core processor with 1.8GHz core frequency up to 3.0GHz, 8GB 3.733MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-QA7/i-CSP-B	015850	Passive cooling solution for Qseven module conga-QA7 with lidded Intel Atom® x6000E processor series. All standoffs are with 2.7mm bore hole.
conga-QA7/i-HSP-B	015851	Standard heatspreader for Qseven module conga-QA7 with lidded Intel Atom® x6000E processor series. All standoffs are with 2.7mm bore hole.
conga-QA7/HSP-B	015852	Standard heatspreader for Qseven module conga-QA7 with open-die Intel® Pentium® and Celeron® J and N processors. All standoffs are with 2.7mm bore hole.
conga-QA7/CSP-B	015853	Passive cooling solution for Qseven module conga-QA7 with open-die Intel® Pentium® and Celeron® J and N processors. All standoffs are with 2.7mm bore hole.
conga-QA7/i-CSP-T	015854	Passive cooling solution for Qseven module conga-QA7 with lidded Intel Atom® x6000E processor series. All standoffs are M2.5x0.45p threaded.
conga-QA7/i-HSP-T	015855	Standard heatspreader for Qseven module conga-QA7 with lidded Intel Atom® x6000E processor series. All standoffs are M2.5x0.45p threaded.
conga-QA7/HSP-T	015856	Standard heatspreader for Qseven module conga-QA7 with open-die Intel Pentium/Celeron J and N processors. All standoffs are M2.5x0.45p threaded.
conga-QA7/CSP-T	015857	Passive cooling solution for Qseven module conga-QA7 with open-die Intel Pentium/Celeron J and N processors. All standoffs are M2.5x0.45p threaded.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[congatec:](#)

[conga-QA7/CSP-B](#) [conga-QA7/CSP-T](#) [conga-QA7/HSP-B](#) [conga-QA7/HSP-T](#) [conga-QA7/i-CSP-B](#) [conga-QA7/i-CSP-T](#) [conga-QA7/i-HSP-B](#) [conga-QA7/i-HSP-T](#) [conga-QA7/i-x6212RE-4G eMMC32](#) [conga-QA7/i-x6414RE-4G eMMC32](#) [conga-QA7/i-x6425RE-8G eMMC32](#) [conga-QA7/J6413-8G eMMC32](#) [conga-QA7/J6426-16G eMMC64](#) [conga-QA7/x6211E-4G eMMC32](#) [conga-QA7/x6413E-8G eMMC32](#) [conga-QA7/x6425E-16G eMMC64](#)