

Rocker Switch

Single and Double Pole

WR Series



Features

- Lighted and non-lighted
- Rugged design for 2-pole high current applications
- RoHS compliant
- Minimum 10,000 operations mechanical life


Standard Parts¹

North America and Europe			Europe		
WRG32F2FBBRLN	WRG32F2FBGLN	WRG32F5FBBNN	WRG32F2BBBNN	WRG32F2FBGEN	WRG32F7BWWKN
WRG32F2FBBBNN	WRG32F2FBRLN		WRG32F2BBGEN	WRG32F2FBREN	WRG32F7BWWNN
			WRG32F2BBGLN	WRG32F7BBBKN	WRG33F2BBBNN
			WRG32F2BBREN	WRG32F7BBBNN	WRG34F2BBBNN


¹The part number configuration matrix below provides details to the part numbers above.

For configurable part numbers that are not listed above, not listed in your region, or for custom part numbers, contact the factory or your distributor.

Part Number Breakdown

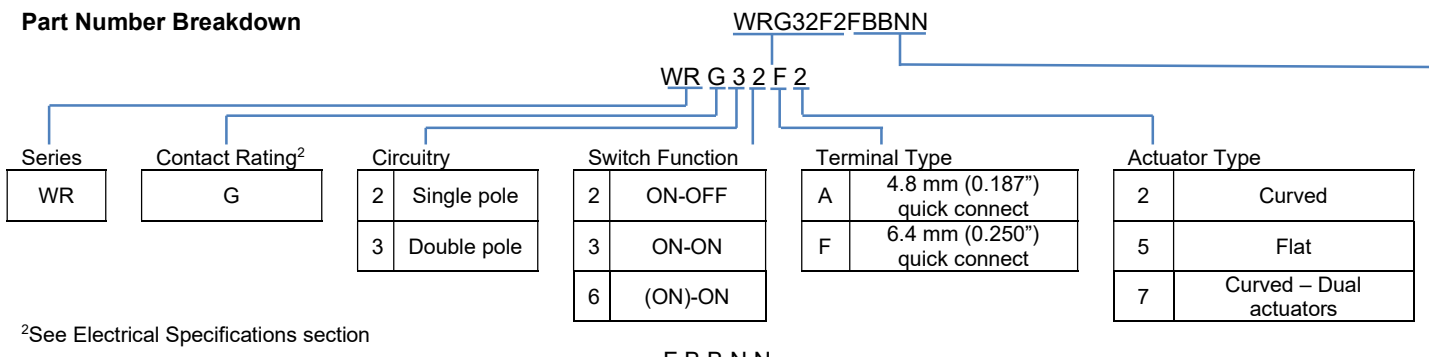

²See Electrical Specifications section

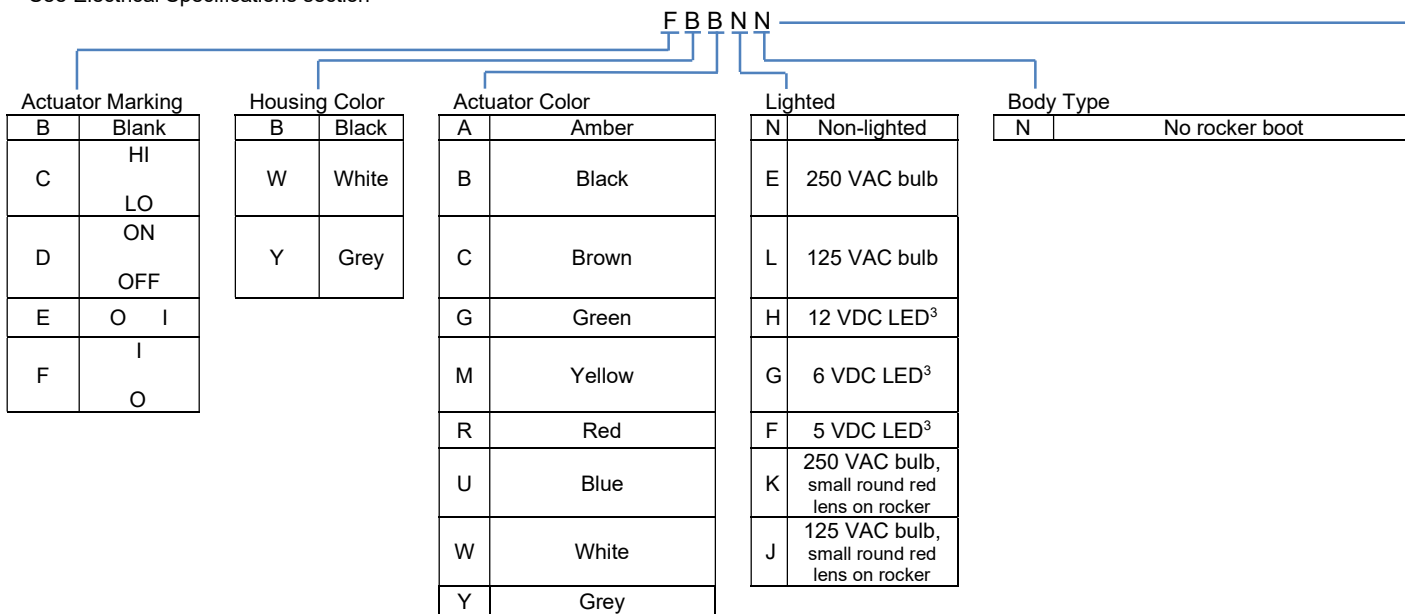

³Switches have no agency DC ratings




Electrical Specifications

Inrush Rating – 2 position	48 A	
Inrush Rating – 3 position	24 A	
Dielectric Strength	1000 VAC for 1 minute	
Insulation Resistance	100 MΩ min at 500 VDC	
Initial Contact Resistance	0.020 Ω max	
<u>Electrical Ratings</u>		
<u>Switch Function</u>	<u>ENEC15</u>	<u>UL61058</u>
ALL	16 (4) A 125 VAC / 250 VAC T125/55	16 (4) A 125 VAC / 250 VAC
Electrical Life at Rated Load	<u>ENEC15</u>	<u>UL61058</u>
Minimum Operations	10,000	10,000
UL File No: E23301		






Material and Environmental Specifications

Actuator, non-lighted	Nylon 66 94V-2	
Actuator, lighted	Polycarbonate	
Base	Nylon 66 94V-2	
Spring	Steel Wire	
Contacts	Silver Alloy	
Movable Arm	Silver-Plated Copper Alloy	
Terminals	Tin-Plated Copper Alloy	
Operating Temperature Range - VDE	-20 °C to +65 °C (-4 °F to +149 °F)	

Circuitry and Switch Functions

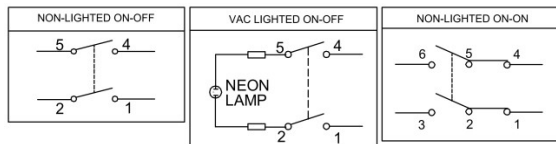

Dimensions mm (inches)

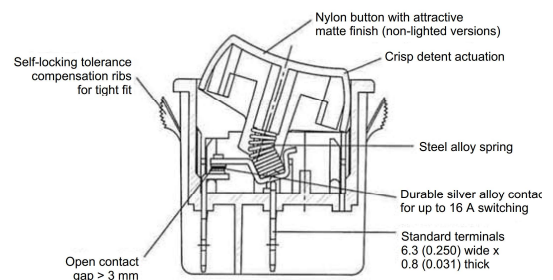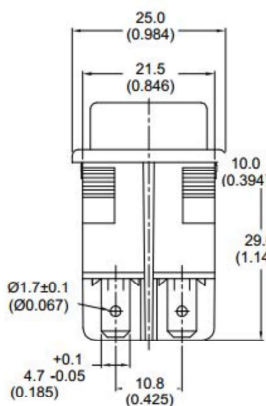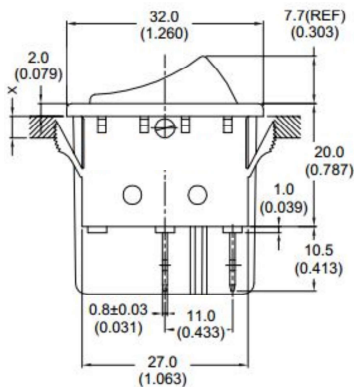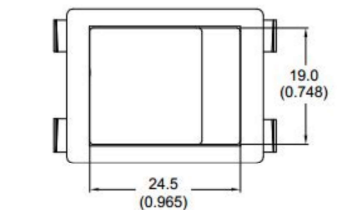

NOTE: TOLERANCES ±0.012 (0.3) UNLESS OTHERWISE SPECIFIED



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ZF Electronics:](#)

[WRG32F2FBBNN](#) [WRG32F2BBRLN](#) [WRG32F2FBGLN](#) [WRG32F2FBRLN](#) [WRG32F5FBBNN](#) [WRG32F2FBGEN](#)
[WRG32F2BBGLN](#) [WRG32F5BBRLN](#)