

ARTESYN AEE SERIES

15 Watts



Standard features include 1,500 Vdc input/output isolation and short-circuit protection with auto-restart. AEE series converters have an operating temperature range of -40 to 71°C without derating and are suitable for diverse applications in areas such as industrial automation, instrumentation, test and measurement, and telecommunications. The 3.3 Vdc output model has a power output rating of 13.2 watts, while all other models are rated at 15 watts.

DATA SHEET

Total Power:

15 Watts

Input Voltage:

12 V, 24 V or 48 V

of Outputs:

Single, Dual

SPECIAL FEATURES

- Encapsulated
- 4:1 input range
- 1" x 2" package
- 1500 Vdc I/O isolation
- Single and Dual output

SAFETY

- UL 62368-1
- CE Mark



ELECTRICAL SPECIFICATIONS

Input				
Input range:	9 to 36 VDC; 18 to 75 VDC			
Efficiency2:	84% @ 12 Vo			
Output				
Voltage tolerance:	±2.0%			
Line regulation:	±0.5%			
Load regulation:	Single output: ±1.0% Dual output: ±TBD%			
Noise/ripple:	3.3 Vo: 100 mV 5.0 Vo: 100 mV 12 Vo: 120 mV 15 Vo: 120 mV			
Short circuit protection:	Auto-restart			
Switching frequency:	300 KHz			
Temperature coefficient:	±0.02 /°C			
Isolation				
I/O isolation:	1500 VDC min.			
Insulation resistance:	10 Mohm			
Insulation capacitance:	1000 pF typical			

ENVIRONMENTAL SPECIFICATIONS

Operating ambient temperature range:	-40°C to +71°C (no derating)	
Storage temperature:	-55 °C to +105 °C	
Humidity:	5% to 95% (non-condensing)	
MTBF:	>1 Million hours	
RoHS Compliant	RoHS-6	




ORDERING INFORMATION

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
AEE04F18-LS	9 - 36 V	3.3 V @ 4 A		13.2 W
AEE03A18-LS	9 - 36 V	5 V @ 3 A		15 W
AEE01B18-LS	9 - 36 V	12 V @ 1.25 A		15 W
AEE01C18-LS	9 - 36 V	15 V @ 1 A		15 W
AEE01AA18-LS	9 - 36 V	5 V @ 1.5 A	-5 V @ 1.5 A	15 W
AEE00BB18-LS	9 - 36 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE00CC18-LS	9 - 36 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W
AEE04F36-LS	18 - 75 V	3.3 V @ 4 A		13.2 W
AEE03A36-LS	18 - 75 V	5 V @ 3 A		15 W
AEE01B36-LS	18 - 75 V	12 V @ 1.25 A		15 W
AEE01C36-LS	18 - 75 V	15 V @ 1 A		15 W
AEE01AA36-LS	18 - 75 V	5 V @ 1.5 A	-5 V @ 1.5 A	15 W
AEE00BB36-LS	18 - 75 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE00CC36-LS	18 - 75 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W

Please contact Artesyn Embedded Technologies for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.


MECHANICAL DRAWINGS

Single Output

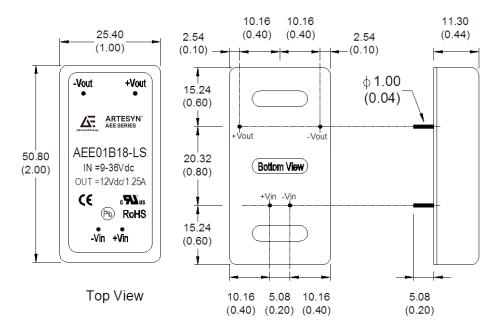

MECHANICAL DRAWINGS (CONTINUED)

Dual Output

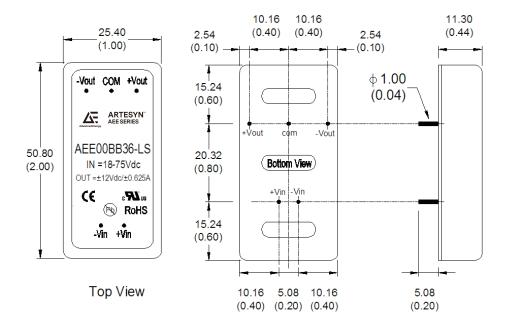

Notes:

- 1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
- 2. Warranty: 1 yr
- 3. Label and logo appearance may vary from what is shown on mechanical drawings.



ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2021 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.



For international contact information, visit advancedenergy.com.

powersales@aei.com (Sales Support) productsupport.ep@aei.com (Technical Support) +1 888 412 7832

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Energy:

<u>AEE01AA18-LS AEE03A36-LS AEE03A18-LS AEE00BB18-LS AEE04F36-LS AEE01C18-LS AEE01B18-LS AEE01C18-LS AEE</u>