

# SL POWER TE10 Family

10 W to 12 W Single Output  
External Power



Advanced Energy's SL Power TE10 series of desktop and wall-plug AC-DC external power adapter comprises five output models. All models feature industrial safety approvals and accept a universal input of 90 to 264 VAC. These compact switch-mode power supplies feature output overvoltage, overtemperature, overload protection, with short-circuit protection on all output models. TE10 series power adapters provide up to 12 Watts of output power with IP22 rated enclosure and meets DoE Efficiency Level VI Requirements.

## AT A GLANCE

### Total Power

10 to 12 Watts

### Input Voltage

90 to 264 VAC

### # of Outputs

Single

## SPECIAL FEATURES

- Universal Input 90 to 264 VAC  
Input Range Desktop and Wall-Plug  
Versions
- Up to 12 W of AC-DC Power
- IP22 Rated Enclosure\*
- Efficiency 87% Typical
- Meets EN55022/CISPR22, FCC Part  
15.109 Class B Conducted & Radiated  
Emissions, with 6db Margin
- Meets "Heavy Industrial" Levels of  
EN61000 EMC Requirements
- >10 Years E-Cap Life
- >1,000,000 Hours MTBF
- 3 Years Warranty
- Meets DoE Efficiency Level VI  
Requirements No Load Input Power  
Average Efficiency
- RoHS Compliant

## SAFETY

- CSA/IEC/EN/UL62368-1



Note: \*IP22 does not include interchangeable blade versions.


## ELECTRICAL SPECIFICATIONS

Input	
Input range	90 to 264 VAC, $\pm 10\%$ , 47 to 63 Hz, 1 $\phi$
Input current	0.45 A @ 115 VAC, 0.28 A @ 230 VAC
Inrush current	40 A max., cold start @ 264 VAC input
Input fuses	F1, F2: 3.15 A, 250 VAC fuses provided on all models
Earth leakage current	<div>Input to GND &lt;500 <math>\mu</math>A @ 264 VAC, 60 Hz, NC</div> <div>Output to GND &lt;4 mA @ 264 VAC, 60 Hz, NC</div>
Efficiency	Meets US DoE Efficiency Level VI average efficiency levels
No load input power	<0.1 W per DoE Efficiency Level VI requirements
Output	
Output voltage	See models chart on page 5
Output power	10 W to 12 W continuous - See models chart for specific voltage model ratings
Turn on time	Less than 700 mS @ 115 VAC, full load
Hold-up time	20 mS min., at full load, 100 VAC input
Ripple and noise	See models chart on page 5
Transient response	<div>500 <math>\mu</math>S response time for return to within 0.5% of final value for any 50% load step over the range of 5% to 100% of rated load, <math>\Delta i/\Delta t &lt; 0.2</math> A/<math>\mu</math>S</div> <div>Max. voltage deviation is <math>\pm 3.5\%</math></div>
Total load regulation	See models chart on page 5
Reliability	
MTBF	>1,000,000 hours, full load, 110 VAC & 220 VAC input, 25°C amb., per Telcordia 332 Issue 6, Stress Method
E-Cap life	>10 years life based on calculations at 115 VAC/60 Hz & 230 VAC/50 Hz, ambient 25°C at 24 hours/day, 365 days/year, 6 power up cycles/day.
Protection	
Overtemperature protection	Will shutdown upon an overtemperature condition, auto-recovery
Overload protection	130% to 180% of rating, hiccup mode
Overvoltage protection	130% to 150% of output voltage, hiccup mode
Short circuit protection	Hiccup mode, auto-recovery
Safety	
Safety standards	EN/CSA/IEC/UL62368-1
Drop test	1.4 m from table top to wooden platform, 6 faces
Isolation	
Isolation	<div>Input to Output: 4000 VAC</div> <div>Input to Ground: 1500 VAC</div> <div>Output to Ground: 1500 VAC</div>

Note:

All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## DERATING CHART

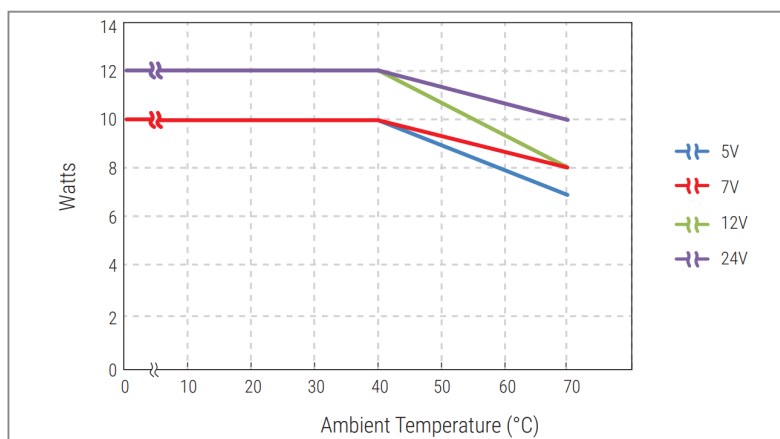

## EMI/EMC COMPLIANCE

Conducted emissions	EN55022/CISPR22 Class B, FCC Part 15.107, Class B: 6db margin type, at 115 VAC and 230 VAC
Radiated emissions	EN55022/CISPR22 Class B, FCC Part 15.109, Class B: 3db margin type, at 115 VAC and 230 VAC
Electro-static discharge (ESD) immunity on power ports	EN55024/IEC61000-4-2, Level 4: ±8 kV contact, ±15 kV air, Criteria A
Radiated RF EM fields susceptibility	EN55022/EN61000-4-3, 10 V/m, 80 MHz to 2.7 GHz, 80% AM at 1 kHz
EFT/Burst immunity	EN55024/IEC61000-4-4, Level 4, ±4 kV, 100 kHz rep rate, 40 A, Criteria A
Surges, line to line (DM) and line to ground (CM)	EN55024/IEC61000-4-5, Level 4, ±2 kV DM, ±4 kV CM, Criteria A
Conducted RF immunity	EN55022/IEC61000-4-6, 3.6 V/m - Level 4, 0.15 MHz to 80 MHz; and 12 V/m in ISM and amateur radio bands between 0.15 MHz and 80 MHz, 80% AM at 1 kHz
Power frequency magnetic field immunity	EN55024/IEC1000-4-8, Level 4: 30 A/m, 50 Hz / 60 Hz
Voltage dip immunity	EN55024/IEC/EN61000-4-11: --100% dip for 20 mS, Criteria A --100% dip for 5000 mS (250/300 cycles), Criteria B --60% dip for 100 mS, Criteria B --30% dip for 500 mS, Criteria A
Harmonic current emissions	EN55011/EN61000-3-2, Class A
Flicker test	EN61000-3-3
Common mode noise	High frequency (100 kHz to 20 MHz): <40 mA pk-pk

Note:

All specifications are typical at nominal input, full load, at 25°C ambient unless noted.


## ENVIRONMENTAL SPECIFICATIONS

Operating temperature	-20°C to +70°C Start up at -40°C, full load (warmup period before all parameters are within published specifications)
Storage temperature	-40°C to +85°C
Relative humidity	5% to 95%, non-condensing
Weight	110 grams
Dimensions	See outline drawings
Temperature derating	See derating chart
Operating altitude	Operating: to 5000 m Non-operating: -500 ft to 40000 ft
Vibration	Operating: 0.003 g/Hz, 1.5 grams overall, 3 axes, 10 min/axis, 1 Hz to 500 Hz Non-Operating: random waveform, 3 minutes/axis, 3 axes and sine waveform, Vib. frequency/acceleration: 10 to 500 Hz/1g, sweep rate of 1 octave/minutes, Vibration time of 10 sweeps/axes, 3 axes
Shock	Operating: half-sine, 20 gpk, 10 mS, 3 axes, 6 shocks total Non-Operating: half-sine waveform, impact acceleration of 100 G, pulse duration of 6 mS, Number of shocks: 3 for each of the 3 axes

Note:

All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## MECHANICAL DRAWING

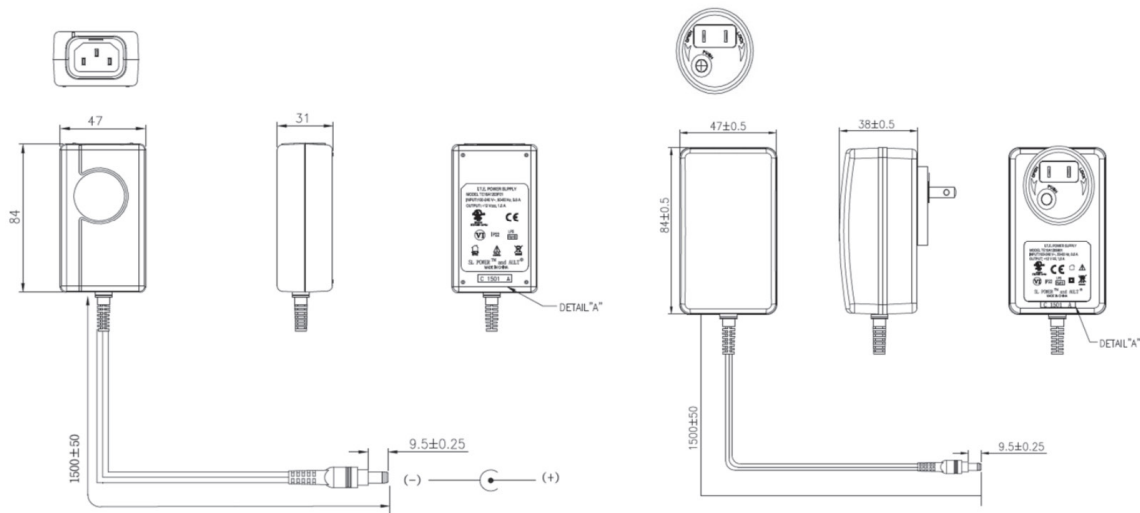

IEC60320 C14 Receptacle, 2.5mm x 5.5mm x 9.5mm Barrel Connector


Interchangeable N.A. Blade, 2.5mm x 5.5mm x 9.5mm Barrel Connector

Notes:

1. Weight: 110 grams.
2. All dimensions in mm.
3. Interchangeable blade models come with North American blade fitted. For other blades (EU, UK, AU) order blade kit KT1027K.
4. The unit should not be covered or enclosed to protect against excessive case temperature rise.
5. Pins 4,5,6 are located closest to the locking tab.

## LEADWIRE HOOK-UP

PIN #	FUNCTION	COLOR
1	+V	RED
2	NC	-
3	COMMON	BLACK
4	+V	WHITE
5	NC	-
6	COMMON	GREEN
	BRAID	FG4



## MODEL SELECTION

Model Number	Output Voltage	Output Current	Output Power	Ripple & Noise <sup>1</sup>	Line Regulation	Load Regulation	Output Connector	Input Configuration
TE10A0503F01	5.0 V	2.0 A	10 W	75mV pk-pk	± 1%	± 5%	2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	Class I Desktop, IEC60320 C14 Receptacle <sup>2</sup>
TE10A0603F01	5.9 V	1.6 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0703F01	7.5 V	1.3 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A1203F01	12.0 V	1.0 A	12 W	120mV pk-pk	± 1%	± 5%		
TE10A2403F01	24.0 V	0.5 A	12 W	240mV pk-pk	± 1%	± 5%	2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	Class II Desktop, IEC60320 C8 Receptacle
TE10A0503N01	5.0 V	2.0 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0603N01	5.9 V	1.6 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0703N01	7.5 V	1.3 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A1203N01	12.0 V	1.0 A	12 W	120mV pk-pk	± 1%	± 5%	2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	Class II Desktop, IEC60320 C18 Receptacle
TE10A2403N01	24.0 V	0.5 A	12 W	240mV pk-pk	± 1%	± 5%		
TE10A0503Q01	5.0 V	2.0 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0603Q01	5.9 V	1.6 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0703Q01	7.5 V	1.3 A	10 W	75mV pk-pk	± 1%	± 5%	2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	Class II Wall-Plug, Interchangeable Blades (North American Blade included) <sup>3</sup>
TE10A1203Q01	12.0 V	1.0 A	12 W	120mV pk-pk	± 1%	± 5%		
TE10A2403Q01	24.0 V	0.5 A	12 W	240mV pk-pk	± 1%	± 5%		
TE10A0503B01	5.0 V	2.0 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0603B01	5.9 V	1.6 A	10 W	75mV pk-pk	± 1%	± 5%	2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	Class II Wall-Plug, Fixed North American Blades <sup>4</sup>
TE10A0703B01	7.5 V	1.3 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A1203B01	12.0 V	1.0 A	12 W	120mV pk-pk	± 1%	± 5%		
TE10A2403B01	24.0 V	0.5 A	12 W	240mV pk-pk	± 1%	± 5%		
TE10A0503C01	5.0 V	2.0 A	10 W	75mV pk-pk	± 1%	± 5%	2.5 x 5.5 x 9.5mm Straight Barrel Type, Center Positive	Class II Wall-Plug, Fixed North American Blades <sup>4</sup>
TE10A0603C01	5.9 V	1.6 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A0703C01	7.5 V	1.3 A	10 W	75mV pk-pk	± 1%	± 5%		
TE10A1203C01	12.0 V	1.0 A	12 W	120mV pk-pk	± 1%	± 5%		
TE10A2403C01	24.0 V	0.5 A	12 W	240mV pk-pk	± 1%	± 5%		

## Notes:

1. Measured at the output connector, with noise probe directly across output and load terminated with 0.1  $\mu$ F ceramic and 10  $\mu$ F low ESR capacitors. For 5 V and 6 V models, values listed are typical 100 mV pk-pk maximum with 0.1  $\mu$ F ceramic and 47  $\mu$ F low ESR capacitors used at measurement point.
2. For input Class I models: For AC GND connected to output common (-), insert a "B" in the part number where the "A" is located (TE10B0503F01).
3. Order blade kit KT-1027K for other blades (EU, UK, Australia).
4. For EU fixed blades, replace "C" in the model number with "M", for UK blades, replace "C" with "G", for Australia blades, replace "C" with "H".
5. All specifications are typical at nominal input, full load, at 25°C ambient unless noted.

## CONNECTOR INFORMATION

Standard models include a 2.5 x 5.5 x 9.5 mm straight barrel type connector (Ault #3), center positive. Other standard options are listed below. The "03" in the standard model number is replaced by the applicable digits below.

Connector No.	Description	Connector No.	Description
02	2.1 x 5.5 x 9.5 mm straight barrel plug - Center positive 	44	2.1 x 5.5 x 9.5 mm straight barrel plug, locking - Center positive 
03	2.5 x 5.5 x 9.5 mm straight barrel plug - Center positive (Standard models) 	45	2.5 x 5.5 x 9.5 mm straight barrel plug, locking - Center positive 
12	5-pin DIN - 180 male connector (Pins 3,5 = (+); pins 1,2,4 = (-)) 	48	3-pin Snap n Lock, Kycon Kpp - 3P or equivalent (Pin 1 = (+); pin 2 = (-)) 
22	6-pin DIN male connector (Pins 1,2 = (+); pins 4,5 = (-)) 	49	4-pin Snap n Lock, Kycon Kpp - 4P or equivalent (Pins 1,3 = (+); pins 2,4 = (-)) 
23	8-pin DIN male connector (Pins 3,7 = (+); pins 1,4,6,8 = (-); shell = FG) 	51	6-pin Minifit - Molex 39-01-2060 or equivalent (Pins 1,4 = (+); pins 3,6 = (-)) 
32	9-pin "D" type, female (Pin 8 = (+); pin 5 = (-); all others = NC) 	65	Stripped and tinned leads 
33	2.5 x 5.5 x 12.5 mm straight barrel plug - Center positive 	70	2.1 x 5.5 x 11 mm right angle barrel plug (High retention) - Center positive 
40	2.1 x 5.5 x 9.5 mm right angle barrel plug - (High retention) - Center positive 	71	2.5 x 5.5 x 11 mm right angle barrel plug (High retention) - Center positive 
41	2.5 x 5.5 x 9.5 mm right angle barrel plug - (High retention) - Center positive 	72	2.1 x 5.5 x 9.5 mm straight barrel plug (High retention, no spark) - Center positive 
42	2.1 x 5.5 x 11 mm straight barrel plug - (High retention) - Center positive 	73	2.5 x 5.5 x 9.5 mm straight barrel plug (High retention, no spark) - Center positive 
43	2.5 x 5.5 x 11 mm straight barrel plug - (High retention) - Center positive 	74	EIAJ#5 style connector - Central positive 

## EFFICIENCY LEVEL VI INFORMATION

Single-Voltage External AC-DC Power Supply, Basic-Voltage		
Nameplate Output Power (Pout)	Minimum Average Efficiency in Active Mode (expressed as a decimal)	Maximum Power in No-Load Mode (W)
$P_{out} \leq 1 \text{ W}$	$\geq 0.5 \times P_{out} + 0.16$	$\leq 0.100$
<b><math>1 \text{ W} &lt; P_{out} \leq 49 \text{ W}</math></b>	<b><math>\geq 0.071 \times \ln(P_{out}) - 0.0014 \times P_{out} + 0.67</math></b>	<b><math>\leq 0.100</math></b>
$49 \text{ W} < P_{out} \leq 250 \text{ W}$	$\geq 0.880$	$\leq 0.210$
$P_{out} > 250 \text{ W}$	$\geq 0.875$	$\leq 0.500$
Single-Voltage External AC-DC Power Supply, Low-Voltage		
Nameplate Output Power (Pout)	Minimum Average Efficiency in Active Mode (expressed as a decimal)	Maximum Power in No-Load Mode (W)
$P_{out} \leq 1 \text{ W}$	$\geq 0.517 \times P_{out} + 0.087$	$\leq 0.100$
<b><math>1 \text{ W} &lt; P_{out} \leq 49 \text{ W}</math></b>	<b><math>\geq 0.0834 \times \ln(P_{out}) - 0.0014 \times P_{out} + 0.609</math></b>	<b><math>\leq 0.100</math></b>
$49 \text{ W} < P_{out} \leq 250 \text{ W}$	$\geq 0.870$	$\leq 0.210$
$P_{out} > 250 \text{ W}$	$\geq 0.875$	$\leq 0.500$



For international contact information,  
visit [advancedenergy.com](https://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

**PRECISION | POWER | PERFORMANCE | TRUST**

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2022 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, and AE® are U.S. trademarks of Advanced Energy Industries, Inc.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Energy:](#)

[TE10A0602F01](#) [TE10A1202Q01](#) [TE10A2402B01](#) [TE10A0702N01](#) [TE10A1202F01](#) [TE10A0603B01](#)  
[TE10A0602Q01](#) [TE10A1202N01](#) [TE10A0602N01](#) [TE10A0603C01](#) [TE10A2402C01](#) [TE10A2402F01](#) [TE10A0702F01](#)  
[TE10A0502C01](#) [TE10A0502B01](#) [TE10A0502N01](#) [TE10A0502F01](#) [TE10A0502Q01](#) [TE10A0602B01](#)  
[TE10A0702B01](#) [TE10A0702C01](#) [TE10A2402Q01](#) [TE10A1202B01](#) [TE10A0702Q01](#) [TE10A1202C01](#) [TE10A0602C01](#)  
[TE10A0603N01](#) [TE10A0603Q01](#) [TE10A2402N01](#) [TE10A0503Q01](#) [TE10A1203Q01](#) [TE10A0703C01](#)  
[TE10A1203C01](#) [TE10A0703Q01](#) [TE10A2403Q01](#) [TE10A0503C01](#) [TE10A2403C01](#) [TE10B1203F02](#)