HIGH POWER C SERIES

High Voltage Cap-Charging Supply

This High Power line of high-voltage regulated DC to DC converters is an extension of the C Series, directly addressing the high power density needs of >30 watt applications. High Power C units provide up to 60/125/250 watts. This high power density is especially suited to high-energy systems with large capacitances, fast repetition rates, or high continuous-DC-power requirements. See Application Note 10 for more charging information. Typical applications for the High Power C Series include the following: laser, cap-charging, pulsed power, pulse generator, and test equipment.

- 7 models from 0 to 125 Volts through 0 to 6kV
- 60, 125, or 250 watts of output power
- Maximum Iout capability down to 0 Volts
- Maximum Iout during charge/rise time
- Output short-circuit protection
- Very fast rise with very low overshoot



- High efficiency
- High power to voltage density
- Very low profile
- Output current & voltage monitors
- >200,000 hour MTBF @65°C
- Fixed-frequency, low-stored-energy design
- UL/cUL Recognized Component; CE Mark (LVD & RoHS)

| PARAMETER | CONDITIONS | | | _ | | | | | | _ | _ | | _ | | | | | | | | | | UNITS |
|--------------------------------------|---|--|--|-----|---|---------|------|-----|---------|-----|-----|------------|--------|--------|------------|-----|------------|-----|-----|------------|------|-----|-------|
| INPUT | | | | | | | | | | | | AL | L TY | PES | ; | | | | | | | | |
| Voltage Range | Full Power | | + 23 to 30 | | | | | | | | | | VDC | | | | | | | | | | |
| Voltage Range | Derated Power Range | | + 11 to 32 | | | | | | | | | | VDC | | | | | | | | | | |
| Current | Standby / Disable | 1 | < 40 | | | | | | | | | | mA | | | | | | | | | | |
| Current | Max Load, Max Eout | | 60W: 3, 125W: 6 250W: 12 | | | | | | | | | | | A | | | | | | | | | |
| Current | No Load, Max Eout | | 1/8C to 1C: < 300, 2C to 6C: < 500 | | | | | | | | | | | mA | | | | | | | | | |
| AC Ripple Current | Nominal Input, Full Load | | < 50 | | | | | | | | | | | mA p-p | | | | | | | | | |
| OUTPUT | | 1/8C 1/4C 1/2C 1C 2C 4C | | | | | | | 6C | | | | | | | | | | | | | | |
| Voltage Range | Nominal Input | (|) to 12 | 5 | _ | 0 to 25 | | _ | 0 to 50 | | 0 | 0 to 1,000 | | 0 | 0 to 2,000 | | 0 to 4,000 | | | 0 to 6,000 | | | VDC |
| Power | Nominal Input, Max Eout | 60 | 125 | 25 | 0 60 | 125 | 250 | 60 | 125 | 250 | 60 | 125 | 250 | 60 | 125 | 250 | 60 | 125 | 250 | 60 | 125 | 250 | Watts |
| Current | lout, Entire Output Voltage Range | 480 | 1000 | 200 | 00 240 | 500 | 1000 | 120 | 250 | 500 | 60 | 125 | 250 | 30 | 62 | 125 | 15 | 31 | 62 | 10 | 21 | 42 | mA |
| Current Scale Factor | Full Load | 400 | 833 | 166 | 57 200 | 417 | 833 | 109 | 208 | 417 | 50 | 114 | 227 | 26 | 52 | 104 | 11.5 | 26 | 52 | 6.2 | 17.7 | 35 | mA/V |
| Voltage Monitor Scaling | | | $100.1 \pm 2\%$ into $10M\Omega$ | | | | | | | | | | | | | - | | | | | | | |
| Ripple | Full Load, Max Eout, Cload ≥0.5uF | | <1.0 | | | | | | | | | | %V p-p | | | | | | | | | | |
| Overshoot | C Load, O Eout to Full Eout | | <1 | | | | | | | | | | | %V pk | | | | | | | | | |
| Rise Time | Max lout, Various C Loads & Eout | | Figure A | | | | | | | | | | - | | | | | | | | | | |
| Storage Capacitance | Internal | 0.90 | 0.90 0.90 1.80 0.90 0.90 1.80 0.43 0.43 0.85 0.019 0.019 0.038 0.019 0.019 0.038 0.013 0.013 0.026 0.013 0.013 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 0.026 | | | | | | | | uF | | | | | | | | | | | | |
| Line Regulation | Nom. Input, Max Eout, Full Power | | < 0.01% | | | | | | | | | | VDC | | | | | | | | | | |
| Static Load Regulation | No Load to Full Load, Max Eout | | < 0.01% | | | | | | | | | | VDC | | | | | | | | | | |
| Stability | 30 Min. warmup, per 8 hr/ per day | | < 0.01% / < 0.02% | | | | | | | | | | VDC | | | | | | | | | | |
| PROGRAMMIN | G & CONTROLS | | | | | | | | | | ALL | . T | /PES | | | | | | | | | | |
| Input Impedance | Nominal Input | + Output Models $1.1 \text{M}\Omega$ to GND, - Output Models $1.1 \text{M}\Omega$ to +5 Vref | | | | | | | | MΩ | | | | | | | | | | | | | |
| Adjust Resistance | Typical Potentiometer Values | | 10K to 100K (Pot across Vref. & Signal GND, Wiper to Adjust) | | | | | | | | | Ω | | | | | | | | | | | |
| Adjust Logic | 0 to +5 for +Out, +5 to 0 for - Out | | +4.64 VDC for +Output or +0.36 for -Output = Nominal Eout | | | | | | | | | | - | | | | | | | | | | |
| Output Voltage & Impedance T=+25°C | | | | | $+ 5.00$ VDC $\pm 2\%$, Zout = $464\Omega \pm 1\%$ | | | | | | | | | | | | | - | | | | | |
| Enable/Disable (ON/OFF) | | | 0 to +0.5 Disable, +2.4 to 32 Enable (Default = Enable) | | | | | | | | | | | | | VDC | | | | | | | |
| ENVIRONMEN ^T | TAL | | | | | | | | | | ALL | T | /PES | | | | | | | | | | |
| Operating | Full Load, Max Eout, Case Temp. | -40 to +65 | | | | | | | | | °C | | | | | | | | | | | | |
| Coefficient | Over the Specified Temperature | | ±50 (±25 Optional) | | | | | | | | | PPM/°C | | | | | | | | | | | |
| Thermal Shock | Mil-Std 810, Method 503-4, Proc. II | | -30 (-25 optional) -40 to +65 | | | | | | | | | | °C | | | | | | | | | | |
| Storage | Non-Operating, Case Temp. | | | | | | | | | | -5 | 5 to + | -105 | | | | | | | | | | °C |
| Humidity | All Conditions, Standard Package | | 0 to 95% non-condensing | | | | | | | | | | - | | | | | | | | | | |
| Altitude | Standard Package, All Conditions | Sea Level through 70,000 | | | | | | | | | | ft | | | | | | | | | | | |
| Shock | Mil-Std-810, Method 516.5, Proc. IV | 20 | | | | | | | | | G's | | | | | | | | | | | | |
| Vibration | Mil-Std-810, Method 514.5, Fig.514.5C-3 | 10 | | | | | | | | | G's | | | | | | | | | | | | |

C = uFV = Volts I = mAT = mS

 $T = \frac{C \times V}{\cdot}$

V = kVI = mAF = Hz

 $I = C \times V \times F$

V = kVI = mA

 $E^2 = kV$ J = Ws

Specifications are subject to change without notice.




NOTE: Capacitance must include HVPS internal Capacitance.



HIGH POWER C SERIES

High Voltage Cap-Charging Supply

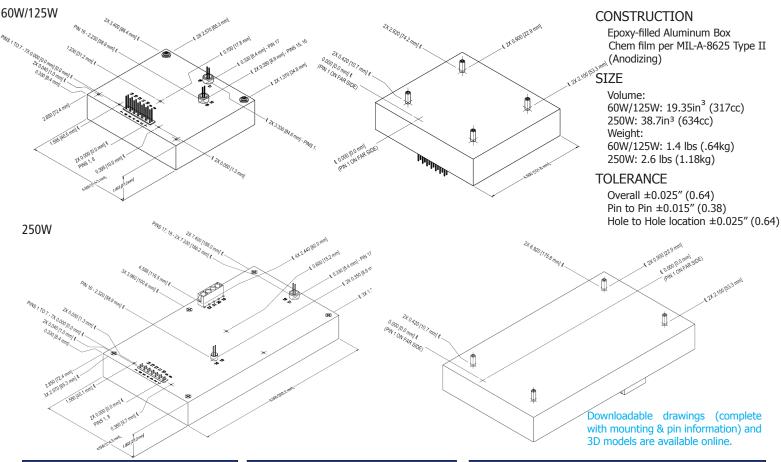

| CONNECTIONS | | | | | | |
|------------------|---------------------------|--|--|--|--|--|
| PIN | FUNCTION | | | | | |
| 1 & 8 | Input Power Ground Return | | | | | |
| 2 & 9 | Positive Power Input | | | | | |
| 3 | Iout Monitor | | | | | |
| 4 | Enable/Disable | | | | | |
| 5 | Signal Ground Return | | | | | |
| 6 | Remote Adjust Input | | | | | |
| 7 | +5VDC Reference Output | | | | | |
| 10, 11, 12, & 13 | N/C | | | | | |
| 14 | Eout Monitor | | | | | |
| 15 & 16 | HV Ground Return | | | | | |
| 17 & 18 | HV Output | | | | | |
| | | | | | | |


All grounds joined internally. Power-supply mounting points isolated from internal grounds by $>100k\Omega$, .01uF / 50V (Max).

| (250 WATT UNITS) | | | | | | |
|------------------|---------------------------|--|--|--|--|--|
| PIN | FUNCTION | | | | | |
| 2, 9, & 10 | N/C | | | | | |
| 19 & 20 | Positive Power Input | | | | | |
| 21 & 22 | Input Power Ground Return | | | | | |
| | | | | | | |





Non-RoHS compliant units are available. Please contact the COMPLIANT factory for more information.



| ORDERING INFORMATION | | | | | | | |
|----------------------|--|--------|--|--|--|--|--|
| | 0 to 125 VDC Output | 1/8C | | | | | |
| Туре | 0 to 250 VDC Output | 1/4C | | | | | |
| | 0 to 500 VDC Output | 1/2C | | | | | |
| | 0 to 1,000 VDC Output | 1C | | | | | |
| | 0 to 2,000 VDC Output | 2C | | | | | |
| | 0 to 4,000 VDC Output | 4C | | | | | |
| | 0 to 6,000 VDC Output | 6C | | | | | |
| Input | nput 24VDC Nominal | | | | | | |
| Polarity | Positive Output | -P | | | | | |
| Folarity | Negative Output | -N | | | | | |
| | 60 Watts Output | 60 | | | | | |
| Power | 125 Watts Output | 125 | | | | | |
| | 250 Watts Output | 250 | | | | | |
| Heat Sink | at Sink .400" High (sized to fit case) | | | | | | |
| PCB Support | (5 or 7) 0.187" standoffs on top cover | -Z11 | | | | | |
| Enhanced | 5V Control and Monitors | -I5 | | | | | |
| Interface | 10V Control and Monitors | -I10 | | | | | |
| Options | 25PPM Temperature Coefficient | -25PPM | | | | | |

Note: For more information on the enhanced interface options, download the I5/I10 Option datasheet.

Popular accessories ordered with this product include CONN-KIT-HP250, CONN-KIT-HP and the BR-8 mounting bracket kit.



PROUDLY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Energy: 2C24-P125