



MINI® Fuseholders HHL & HHM

Description


- In-Line Fuseholders for MINI® Fuses.
- Voltage Rating: 32Vdc maximum
- Current Rating: See Table
- · Body material withstands high temps. Protective cover has removable straps.

Ordering

Specify packaging and product code





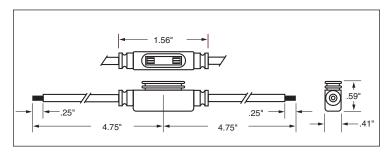

| MINI® Fuse Blade Type Holder | | | | | | |
|------------------------------|------------------------------|-----------|----------------------------|--------------------------------------|--|--|
| Catalog No. | Description | Fuse Size | Electrical Connection | Maximum Continuous Current Rating | | |
| HHL | Black fuseholder w/cover | 2-20A | #16 black lead wire; | 16A* | | |
| HHL-B | Black fuseholder - Body only | | 4" length stripped to 1/4" | | | |
| HHM | Black fuseholder w/cover | 2-30A | #12 red lead wire; | 24A* | | |
| HHM-B | Black fuseholder - Body only | | 4" length stripped to 1/4" | | | |
| HHM-C | Black cover only | I | | | | |

| Bulk Products (Bulk Quantity - 1000 Pieces) | | | | | | | |
|---|------------------------------|-----------|--|--------------------------------------|--|--|--|
| Catalog No. | Description | Fuse Size | Electrical Connection | Maximum Continuous Current Rating | | | |
| BK/HHL-R | Black fuseholder - Body only | 2-20A | #16 red lead wire; 4" length stripped to 1/4" | 16A* | | | |

^{*} or 80% of fuse rating, whichever is less

A fuse must be properly and fully inserted into the holder to provide a solid connection. Poor or improper insertion of the fuse can result in failure of the fuse and holder, thus not protecting the device for which it was intended.

| PACKAGING CODE | | | | |
|----------------|-----------------------|--|--|--|
| Packaging Code | Description | | | |
| BK | 1,000 pieces in a box | | | |



Visit us on the web at: www.cooperbussmann.com

OC-2599 3/07

© Cooper Electronic Technologies 2007 **North America**

Cooper Electronic Technologies Cooper Bussmann 1225 Broken Sound Parkway NW Suite F Boca Raton, FL 33487-3533 Tel: 1-561-998-4100

Fax: 1-561-241-6640

Toll Free: 1-888-414-2645

P.O. Box 14460 St. Louis, MO 63178-4460 Tel: 1-636-394-2877 Fax: 1-800-544-2570

Cooper Electronic Technologies

Cooper (UK) Limited Burton-on-the-Wolds Leicestershire • LE12 5TH UK Tel: +44 (0) 1509 882 737 Fax: +44 (0) 1509 882 786

Europe gies | Cooper Electronic Technologies Avda. Santa Eulalia, 290

08223 Terrassa, (Barcelona), Spain Tel: +34 937 362 812 +34 937 362 813 Fax: +34 937 362 719

Asia Pacific

Cooper Electronic Technologies 1 Jalan Kilang Timor #06-01 Pacific Tech Centre Singapore 159303 Tel: +65 278 6151 Fax: +65 270 4160

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton: