

HHI & HHJ

1/4" (6.3 mm) Diameter in-line fuse holder



RoHS

Product features

- In-line fuse holder family that accepts different fuse lengths and wire gauges depending on product selected
- Accepts 1/4" diameter (6.3 mm) ferrule/cartridge fuses
- Each assembly shall contain two contacts, fuse holder body, knob/cap and spring
- Tin plated brass contacts and thermoplastic body
- End user assembled for varying wire lengths to be accepted

Ordering codes


Specify the packaging code prefix before the part number. For the replacement contacts replace the "/" with a "-" (i.e. BK-HHI-A-R, BK-9838)

Packaging prefixes

- Blank (10 fuse holders with components bagged separately)
- BK- (100 fuse holders with components bagged separately)

Dimensions-In (mm)

Drawing not to scale

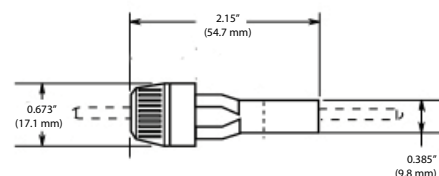

Product specifications

| Part number | Voltage rating (V) maximum | Current rating ¹ (A) maximum | Wire range accepted | Fuse lengths accepted | Replacement contacts |
|-------------|----------------------------|-----------------------------------------|------------------------------------|-----------------------|----------------------|
| HHI-A-R | 250 | 10 | #18 to #22 AWG (end user supplied) | 1-1/16" fuses | BK/9838 |
| HHI-B-R | 250 | 30 | #12 to #16 AWG (end user supplied) | 1-1/16" fuses | BK/9841 |
| HHJ-A-R | 250 | 10 | #18 to #22 AWG (end user supplied) | 1-1/4" (3AG) fuses | BK/9838 |
| HHJ-B-R | 250 | 30 | #12 to #16 AWG (end user supplied) | 1-1/4" (3AG) fuses | BK/9841 |
| HHJ-C-R | 250 | 10 | 19" loop of #18 included | 1-1/4" (3AG) fuses | Not Available |

1. Current rating depends on wire size selected

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2020 Eaton
All Rights Reserved
Printed in USA
Publication No. 11034 BU-MC20004
March 2020

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Eaton:](#)

[BK/HHJ-A-R](#) [BK/HHJ-B-R](#) [BK/HHJ-A](#) [BK/HHJ-B](#) [BK-HHJ-1K0118](#) [HHJ-A-R](#) [BK/HHJ-1K0118](#) [HHJ-C](#) [BK/HHJ-C-R](#)
[BK-HHJ-C](#) [HHJ-B-R](#) [HHJ-C-R](#)