

HR and HM

1/4" x various length and SFE in-line fuse holder

**Product features**

- Bayonet type knob
- Maximum current rating 20 amps; voltage rating 32 volts AC
- Holders available as complete assembly consisting of in-line holder with 8" or 14" of #14 insulated wire and installed fuses
- Replacement springs – BK/1A1853

Environmental data:

Temperature Rating (RTI): +140 °C

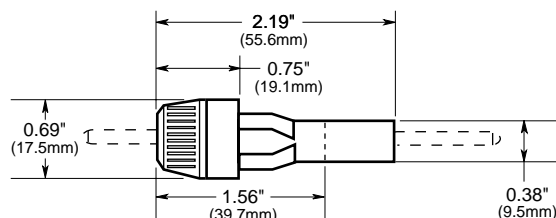
Agency information:

No agency listing

Part Number	Amps	Volts AC	Includes Fuse	Wire
HRJ*	20	32	SFE-20	19" of #14
HRI			SFE-14	
HRH			SFE-9	
HRE			SFE-7½	
HRG			SFE-6	
HRF			SFE-4	
HMJ**			SFE-20	8" of #14
HMI			SFE-14	
HMH			SFE-9	
HME			SFE-7½	
HMG			SFE-6	
HMF			SFE-4	

*Also available as in-line fuseholder only with lead wire contacts, HRJ-Less-Fuse.

**Also available as in-line fuseholder only with lead wire contacts, HMJ-Less-Fuse.

Dimensions: in (mm): All dimensions ±0.015"

Packaging code prefix	Description
Blank	10 Fuse holders with components bagged separately
BK-	100 Fuse holders with components bagged separately

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com/electronics

© 2019 Eaton
All Rights Reserved
Printed in USA
Publication No. 2122 SB98107
November 2019

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[BK/1A1853](#) [BK/9838](#) [9841](#) [BK-1A1853](#) [BK-HRI-LES-FUSE](#) [BK-HRJ-1K0106](#) [BK-HRJ-LES-FUSE](#)