


14.5kW 200-240V 3PH Switched PDU - LX Interface, Gigabit, 30 Outlets, Hubbell CS8365C Input, LCD, 1.8 m Cord, 0U 1.8 m Height, TAA

MODEL NUMBER: PDU3EVS6H50

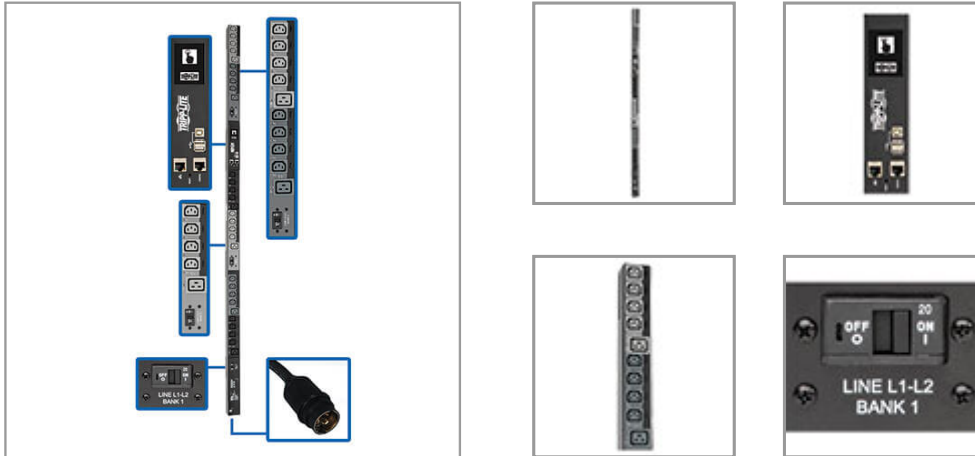

14.5kW 3-phase PDU with multi-function touchscreen LCD distributes, monitors and manages AC power in an IT or industrial environment. Built-in network interface monitors load levels to prevent overloads that cause downtime.

Description

The PDU3EVS6H50 14.5kW 3-Phase Switched Power Distribution Unit provides advanced network control and remote power monitoring with the ability to turn on, turn off, reboot or lock out power to each outlet. Recommended for any IT or industrial application, it features 30 switched outlets (24 C13 and 6 C19) with included plug-lock insert sleeves to prevent cables from becoming accidentally disconnected. A 6-ft. (1.83 m) cord with Hubbell CS8365C plug connects the PDU to a compatible AC power source, generator or protected UPS.

The built-in Java-free HTML5-based LX Platform network interface enables full remote access for PDU status monitoring and email notifications via secure web browser, SNMP, telnet or SSH. It supports 10/100 Mbps auto-sensing for optimum communication with an Ethernet network. Optional EnviroSense2 modules (sold separately) provide a variety of environmental monitoring capabilities. Protocols supported include HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP.

A color touchscreen LCD lets you toggle between menus to monitor input current level per phase, output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy, environmental sensor data and network information. It also generates a unique QR code to allow access to the switchable PDU through a mobile device.

The 0U PDU mounts vertically in racks using the included toolless mounting buttons or the included rack-mounting brackets. Use the included PDUMVROTATEBRKT kit to install the unit with outlets facing the rear for better airflow or equipment access.

Features

Distributes, Monitors and Manages Network-Grade AC Power 14.5kW 200-240V switched rack PDU (rPDU) with 3-phase input Recommended for network applications requiring individual outlet control, load shedding and remote monitoring of critical network components Hubbell CS8365C plug with 6-ft. (1.83 m) cord connects to compatible AC power source Firmware upgrades support future product enhancements

30 Switched Outlets Distribute AC Power 24 C13 and 6 C19 outlets split into 3 separately breakered load banks Individual outlets can be remotely controlled to power up, power down, reboot or lock out devices Plug-lock insert sleeves prevent cables from becoming accidentally disconnected

Color Touchscreen LCD Reports network data, including IP address, input current level per phase, and output current per load bank and per outlet with $\pm 1\%$ billing-grade accuracy Generates unique QR code for read-only access to PowerAlert® Device Manager via mobile device Full access available by logging into

Highlights

- 14.5kW 200-240V 3-phase switched 0U PDU
- 30 individually controllable outlets—24 C13, 6 C19
- Pre-installed GbE-capable WEBCARDLX with latest version of PADM20 for IP-based Auto Probe feature
- Hubbell CS8365C input with 1.8 m power cord
- Touchscreen LCD with mobile access option via QR code

Package Includes

- PDU3EVS6H50 14.5kW 3-Phase Switched PDU
- Built-in LX Platform interface
- Configuration cable
- (30) Plug-lock insert sleeves
- Rack-mounting hardware
- PDUMVROTATEBRKT mounting bracket accessory
- Owner's manual



Powering Business Worldwide



PowerAlert Device Manager via browser as user with read/write credentials

Built-In GbE-Capable LX Interface Pre-installed WEBCARDLX with the latest version of PowerAlert Device Manager firmware (PADM20) provides enhanced remote management capabilities PADM20 and PowerAlert Element Manager (PAEM) form a powerful tool for expanding maintenance functions in large installations, including firmware update checks and backup and restoration of device configurations IP-based Auto Probe detects lost connectivity and restores service autonomously

Broad Communications Compatibility Supports HTTP, HTTPS, SMTP, SNMPv1, SNMPv2, SNMPv3, telnet, SSH, FTP, DHCP and NTP Supports automatic and manual assignment of IP address

Easy 0U Installation in EIA-Standard 19 in. Racks Mounts vertically using included toolless buttons or rack-mounting brackets Included PDUMVROTATEBRKT allows mounting with rear-facing outlets

TAA-Compliant Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases

Specifications

OVERVIEW	
UPC Code	037332195388
PDU Type	Switched
INPUT	
Input Phase	3-Phase
PDU Input Voltage	200; 208; 220; 230; 240
Recommended Electrical Service	Three-phase 50A 200-240V service
Maximum Input Amps	35
Maximum Input Amps Details	Agency de-rated to 35A continuous
PDU Plug Type	HUBBELL CS8365C 50A
Input Cord Length (ft.)	6
Input Cord Length (m)	1.83
OUTPUT	
Output Capacity Details	14.5kW (240V), 13.9kW (230V), 13.3kW (220V), 12.6kW (208V), 12.1kW (200V) total capacity; 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(24) C13; (6) C19
Output Nominal Voltage	200-240V
Overload Protection	Three 20A circuit breakers, 1 per outlet bank
Customized Load Management Receptacles	Each outlet is individually controllable via remote interface
USER INTERFACE, ALERTS & CONTROLS	



Powering Business Worldwide



Reported Load Segments	Reports input current per phase (L1, L2, L3), plus output current for each output load bank (20A balanced max per banks B1-B3) and individual output receptacle (1-30); Outlets are color-coded and labeled for phase and load bank identification; L1-L2 feeds light-gray outlets (B1); L2-L3 feeds black outlets (B2); L3-L1 feeds dark-gray outlets (B3)
Front Panel LCD Display	Touchscreen LCD reports NETWORK DATA (IP address, Subnet Mask, Gateway, MAC Address, Device Name, Model, Serial Number), INPUT PHASE DATA (Amperage, Wattage, Voltage per phase, plus Unbalance percentage), LOAD BANK DATA (Amperage, Wattage, Voltage per load bank, plus total PDU output in watts), OUTLET DATA (Amperage, Wattage per outlet), CONFIGURATION DATA (Listing of current configuration settings), ENVIRONMENTAL DATA (Reports data and status of E2 sensor modules; Sensor options are available for temperature and humidity, plus input and output dry contacts), MOBILE ACCESS (Generates a unique QR code to view reported PDU details on a mobile device)
Front Panel LEDs	One LED for each output receptacle offers power availability information: GREEN (Power ON, load bank capacity <80%), YELLOW (Power ON, load bank capacity >80%), RED (Power OFF/undervoltage), RED FLASHING (Power OFF/breaker trip), LED OFF (Power OFF). Network Activity (Green): Flashes for network activity. Link/Network Speed (Yellow): On steady for any speed.
Switches	LX Platform Interface: Recessed reset switch for interface reboot and factory reset
Current Measurement Accuracy (Amps)	+/-1%
Voltage Measurement Accuracy (Volts)	+/-1%
Power Measurement Accuracy (Watts)	+/-1%
SURGE / NOISE SUPPRESSION	
Automatic Shut-Off	No
PHYSICAL	
Material of Construction	Metal
Rack Height	0U
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / in.)	6.89 x 9.65 x 75.87
Shipping Dimensions (hwd / cm)	17.50 x 24.51 x 192.71
Shipping Weight (lbs.)	27.08
Shipping Weight (kg)	12.28
Unit Dimensions (hwd / in.)	70.000 x 2.170 x 2.860
Unit Dimensions (hwd / cm)	177.8 x 5.5 x 7.3
Unit Weight (lbs.)	20
Unit Weight (kg)	9.07
ENVIRONMENTAL	
Operating Temperature Range	32° to 122°F (0° to 50°C)
Storage Temperature Range	-22° to 140°F (-30° to 60°C)
Relative Humidity	5% to 95% non-condensing
Operating Elevation	0-10000 ft. (0-3000 m)



Powering Business Worldwide



COMMUNICATIONS	
PowerAlert Software	LX Platform Interface: PowerAlert Device Manager
Communications Cable	USB B-to-USB A Configuration/Console Access cable
Network Monitoring Port	RJ45 Network port, RJ45 Config/Console Access port; 2x USB A ports supports a variety of EnviroSense2 environmental and control modules. See Accessories>Management Hardware section for more information about these modules. USB B port (Configuration & Console Access)
SNMP Compatibility	SNMP V1, V2c, V3
Network Compatibility	10 Mbps; 100 Mbps (Fast Ethernet); 1 Gbps (Gigabit)
Communications Interface	Pre-installed network card; RS-232; USB
FEATURES & SPECIFICATIONS	
High Availability PDU Features	Auto Probe Monitoring and Reboot (included); Auto Load Shedding
STANDARDS & COMPLIANCE	
Product Certifications	CAN/CSA-C22.2 No. 60950-1 (Canada); NOM (Mexico); UL 60950-1
Product Compliance	RoHS; FCC Part 15 Class A (USA); Trade Agreements Act (TAA)
WARRANTY & SUPPORT	
Product Warranty Period (Worldwide)	2-year limited warranty

1000 Eaton Boulevard
Cleveland, OH 44122
United States
<https://tripplite.eaton.com>

© 2024 Eaton. All Rights Reserved.
Eaton is a registered trademark. All other trademarks
are the property of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tripp Lite:](#)

[PDU3EVSR6H50](#)