GUICASHE Tach Condition acn Dev

An easy way to tinker and create individual IoT beacons



MA:DE IN GERMANY





Preamble


This document is a preface of a real datasheet and is meant to give you enough data for a quick start with this aconno product.

Please take all necessary data (e.g. temperature or voltage ranges) of the used components from the linked datasheets.

Environmental specifications

- ROHS conform
- Temperature range -40°C to +85°C
- Rilsan® case with IP65 equivalent
- CR2450 battery powered

Schematic

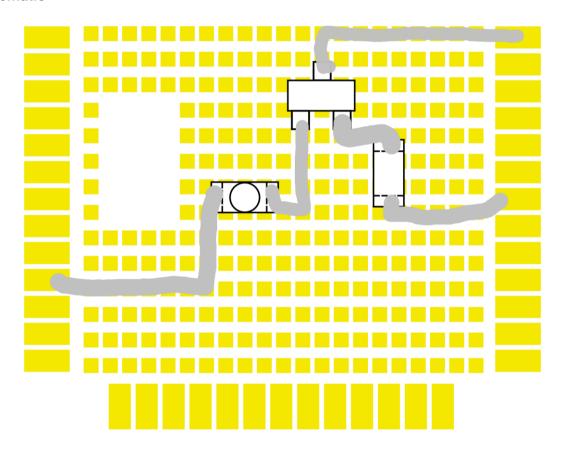

Components

BLE module: ACN52832 (https://aconno.de/products/acn52832)

Conductive silver pen

SMD-pad grid for rapid prototyping with surface mounted devices

















Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

aconno: acnBEACON