


DIP SWITCH
E(M)(I)(S)(J) SERIES

End Stackable /
SMT & Through Hole Type

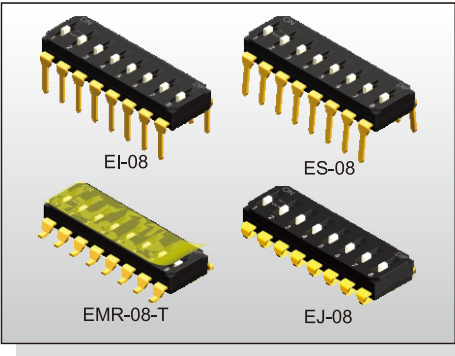

FEATURES

- ※End stackable
- ※Through hole or SMT
- ※Gold contact provides high reliability


APPLICATION

- ※Industrial control
- ※Automatic machines control
- ※Telecommunication

SPECIFICATION

Contact Rating	25mA, 24V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	500V AC/1 minute
Operating Force	1,000gf max.
Travel	1mm
Operating Life	2,000 cycles
Operating Temp.	-20°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

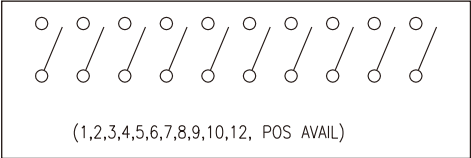

PACKAGE

<Tube>

EM(R)/EI(R)/ES(R)-01: 194 pcs

E(R)-02: 95 pcs

E(R)-03: 63 pcs

E(R)-04: 47 pcs

E(R)-05: 38 pcs

E(R)-06: 31 pcs

E(R)-07: 27 pcs

E(R)-08: 23 pcs

E(R)-09: 21 pcs

E(R)-10: 19 pcs


E(R)-12: 15 pcs

<Tape & Reel>





EM(R)-01~10, 12: 900 pcs

EJ(R)-04, 08, 09, 10: 900 pcs

HOW TO ORDER


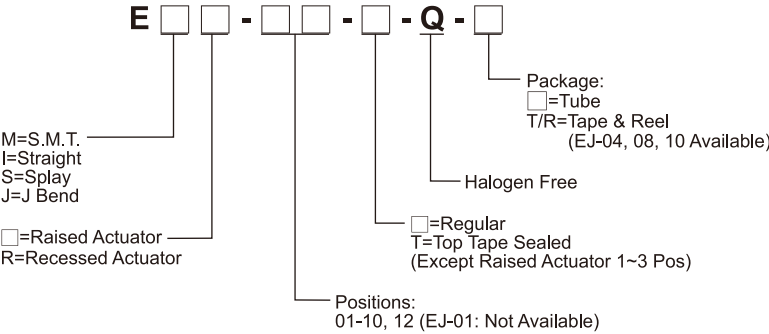


EM(R)

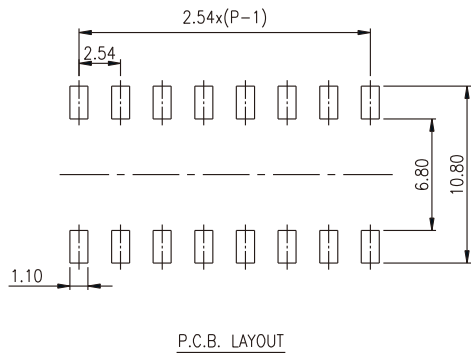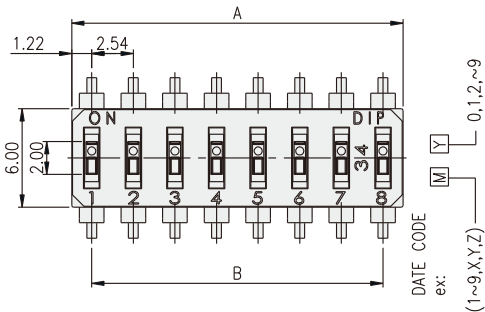

PART NO.	NO.OF POS.	DIM.A	DIM.B
EM(R)-01	1	2.44	
EM(R)-02	2	4.98	2.54
EM(R)-03	3	7.52	5.08
EM(R)-04	4	10.06	7.62
EM(R)-05	5	12.60	10.16
EM(R)-06	6	15.14	12.70
EM(R)-07	7	17.68	15.24
EM(R)-08	8	20.22	17.78
EM(R)-09	9	22.76	20.32
EM(R)-10	10	25.30	22.86
EM(R)-12	12	30.38	27.94



EI(R)

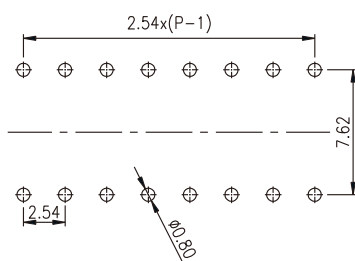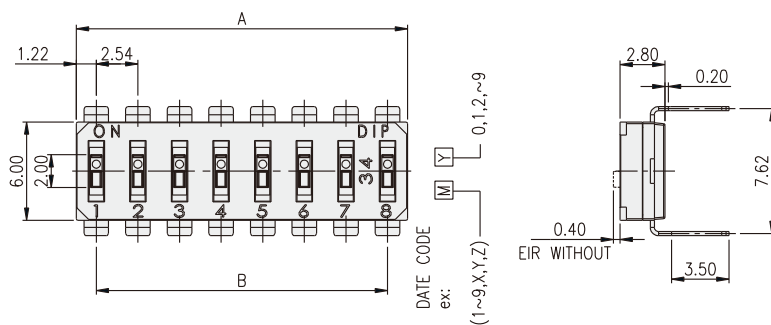

P.C.B. LAYOUT

PART NO.	NO.OF POS.	DIM.A	DIM.B
EI(R)-01	1	2.44	
EI(R)-02	2	4.98	2.54
EI(R)-03	3	7.52	5.08
EI(R)-04	4	10.06	7.62
EI(R)-05	5	12.60	10.16
EI(R)-06	6	15.14	12.70
EI(R)-07	7	17.68	15.24
EI(R)-08	8	20.22	17.78
EI(R)-09	9	22.76	20.32
EI(R)-10	10	25.30	22.86
EI(R)-12	12	30.38	27.94





ES(R)

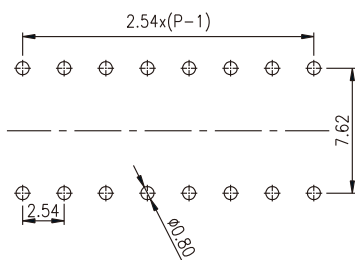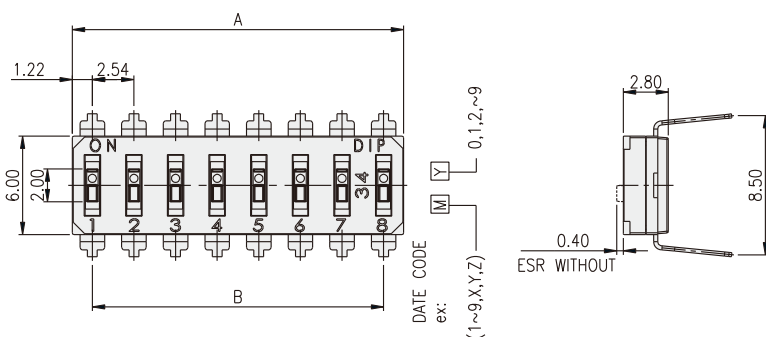

P.C.B. LAYOUT

PART NO.	NO.OF POS.	DIM.A	DIM.B
ES(R)-01	1	2.44	
ES(R)-02	2	4.98	2.54
ES(R)-03	3	7.52	5.08
ES(R)-04	4	10.06	7.62
ES(R)-05	5	12.60	10.16
ES(R)-06	6	15.14	12.70
ES(R)-07	7	17.68	15.24
ES(R)-08	8	20.22	17.78
ES(R)-09	9	22.76	20.32
ES(R)-10	10	25.30	22.86
ES(R)-12	12	30.38	27.94

EJ(R)

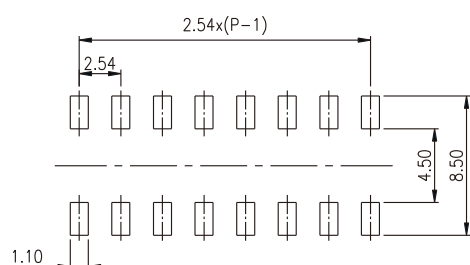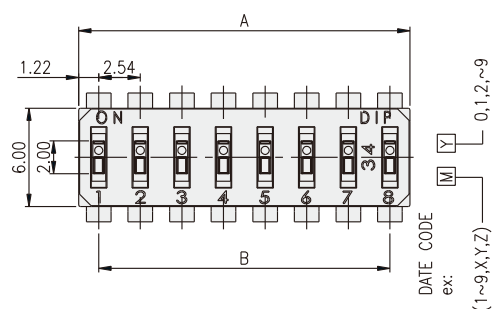

P.C.B. LAYOUT

PART NO.	NO.OF POS.	DIM.A	DIM.B
* EJ(R)-02	2	4.98	2.54
EJ(R)-03	3	7.52	5.08
EJ(R)-04	4	10.06	7.62
* EJ(R)-05	5	12.60	10.16
EJ(R)-06	6	15.14	12.70
* EJ(R)-07	7	17.68	15.24
EJ(R)-08	8	20.22	17.78
EJ(R)-09	9	22.76	20.32
* EJ(R)-10	10	25.30	22.86
* EJ(R)-12	12	30.38	27.94

* Please consult DIPTRONICS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diptronics:

[EMR-12-T-V-T/R](#) [EIR-07-V](#) [EM-09-V-T/R](#) [EM-05-V-T/R](#) [EI-01-V](#) [EI-09-V](#) [EMR-04-T-V-T/R](#) [EMR-01-T-V](#) [EM-05-V](#)
[EMR-12-T-V](#) [EMR-05-T-V-T/R](#) [EM-09-V](#) [EMR-06-V](#) [EMR-10-V](#) [EMR-02-T-V](#) [EMR-07-V](#) [EI-07-V](#) [EMR-02-V](#) [EIR-](#)
[09-V](#) [EMR-02-T-V-T/R](#) [EM-10-V-T/R](#) [EMR-01-V](#) [EIR-01-V](#) [EMR-05-V](#) [EMR-01-T-V-T/R](#) [EMR-12-V](#) [EI-05-V](#) [EIR-](#)
[08-V](#) [EIR-05-V](#) [EI-12-V](#) [EIR-03-V](#) [EM-12-V-T/R](#) [EMR-10-T-V](#) [EM-07-V](#) [EMR-09-T-V](#) [EIR-10-V](#) [EIR-06-V](#) [EMR-08-](#)
[T-V-T/R](#) [EMR-04-V](#) [EMR-07-T-V-T/R](#) [EMR-08-V](#) [EM-01-V-T/R](#) [EMR-07-T-V](#) [EMR-10-T-V-T/R](#) [EM-12-V](#) [EM-08-V-](#)
[T/R](#) [EM-02-V-T/R](#) [EMR-09-V](#) [EMR-03-V](#) [EMR-05-T-V](#) [EMR-09-T-V-T/R](#) [EM-06-V-T/R](#) [EMR-03-T-V-T/R](#) [EIR-12-V](#)
[EMR-06-T-V-T/R](#) [EM-03-V-T/R](#) [EMR-06-T-V](#) [EM-04-V-T/R](#) [EM-07-V-T/R](#) [EM-01-V](#) [EI-04-V](#) [EI-10-V](#) [EM-06-V](#)
[EMR-03-T-V](#) [EMR-04-T-V](#) [EM-02-V](#) [EIR-02-V](#) [EI-08-V](#) [EIR-04-V](#) [EM-10-V](#) [EM-04-V](#) [EM-03-V](#) [EM-08-V](#) [EI-06-V](#)
[EI-03-V](#) [EMR-08-T-V](#) [EI-02-V](#) [EIR-08-T-V](#) [EIR-10-T-V](#) [ES-08-V](#)