



# PZUxBL series

## Single Zener diodes in a SOD882 package

Rev. 2 — 11 November 2019

Product data sheet

## 1. Product profile

### 1.1. General description

General-purpose Zener diodes in a SOD882 leadless ultra small Surface-Mounted Device (SMD) plastic package.

### 1.2. Features

- Non-repetitive peak reverse power dissipation:  $P_{ZSM} \leq 40 \text{ W}$
- Total power dissipation:  $P_{tot} \leq 250 \text{ mW}$
- Tolerance series: B: approximately  $\pm 5 \%$ ; B2: approximately  $\pm 2 \%$
- Wide working voltage range: nominal 2.4 V to 36 V (E24 range)
- Low reverse current  $I_R$  range
- Small plastic package suitable for surface-mounted design
- AEC-Q101 qualified

### 1.3. Applications

- General regulation functions

### 1.4. Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_F$	forward voltage	$I_F = 100 \text{ mA}$	[1] -	-	1.1	V
$P_{ZSM}$	non-repetitive peak reverse power dissipation		[2] -	-	40	W
$P_{tot}$	total power dissipation	$T_{amb} \leq 25 \text{ }^\circ\text{C}$	[3] -	-	250	mW
			[4] -	-	550	mW

[1] Pulse test:  $t_p \leq 300 \text{ } \mu\text{s}$ ;  $\delta \leq 0.02$



[2]  $t_p = 100 \text{ } \mu\text{s}$ ; square wave;  $T_j = 25 \text{ }^\circ\text{C}$  prior to surge

[3] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[4] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode  $1 \text{ cm}^2$ .

## 2. Pinning information

Table 2. Pinning

Pin	Description		Simplified outline	Symbol
1	cathode	[1]	 Transparent top view	 006aaa152
2	anode			

[1] The marking bar indicates the cathode

## 3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
PZU2.4BL to PZU36BL [1]	DFN1006-2	leadless ultra small plastic package; 2 terminals	SOD882
PZU2.7B2L to PZU24B2L [2]			

[1] The series consists of 29 types with nominal working voltages from 2.4 V to 36 V.

[2] The series consists of 25 types with nominal working voltages from 2.7 V to 24 V.

## 4. Marking

Table 4. Marking codes

Type number	Marking code	Type number	Marking code
PZU2.4BL	H2	PZU2.7B2L	HZ
PZU2.7BL	H3	PZU3.0B2L	K1
PZU3.0BL	H4	PZU3.3B2L	K2
PZU3.3BL	H5	PZU3.6B2L	K3
PZU3.6BL	H6	PZU3.9B2L	K4
PZU3.9BL	H7	PZU4.3B2L	K5
PZU4.3BL	H8	PZU4.7B2L	K6
PZU4.7BL	H9	PZU5.1B2L	K7
PZU5.1BL	HA	PZU5.6B2L	K8
PZU5.6BL	HB	PZU6.2B2L	H1
PZU6.2BL	HC	PZU6.8B2L	K9
PZU6.8BL	HD	PZU7.5B2L	KA
PZU7.5BL	HE	PZU8.2B2L	KB
PZU8.2BL	HF	PZU9.1B2L	KC
PZU9.1BL	HG	PZU10B2L	KD
PZU10BL	HH	PZU11B2L	KE
PZU11BL	HK	PZU12B2L	KF
PZU12BL	HL	PZU13B2L	KG
PZU13BL	HM	PZU14B2L	KH
PZU15BL	HN	PZU15B2L	KK
PZU16BL	HP	PZU16B2L	KL
PZU18BL	HR	PZU18B2L	KM
PZU20BL	HS	PZU20B2L	KN
PZU22BL	HT	PZU22B2L	KP
PZU24BL	HU	PZU24B2L	KR
PZU27BL	HV	-	-
PZU30BL	HW	-	-
PZU33BL	HX	-	-
PZU36BL	HY	-	-

## 5. Limiting values

**Table 5. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134).*

Symbol	Parameter	Conditions	Min	Max	Unit
$I_F$	forward current		-	200	mA
$I_{ZSM}$	non-repetitive peak reverse current		[1] -	see: Table 8	
$P_{ZSM}$	non-repetitive peak reverse power dissipation		[1] -	40	W
$P_{tot}$	total power dissipation	$T_{amb} \leq 25\text{ °C}$	[2] -	250	mW
			[3] -	500	mW
$T_j$	junction temperature		-	150	°C
$T_{amb}$	ambient temperature		-55	+150	°C
$T_{stg}$	storage temperature		-65	+150	°C

[1]  $t_p = 100\text{ }\mu\text{s}$ ; square wave;  $T_j = 25\text{ °C}$  prior to surge

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[3] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode  $1\text{ cm}^2$ .

## 6. Thermal characteristics

**Table 6. Thermal characteristics**

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$R_{th(j-a)}$	thermal resistance from junction to ambient	in free air	[1] -	-	500	K/W
			[2] -	-	250	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point		[3] -	-	55	K/W

[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode  $1\text{ cm}^2$ .

[3] Soldering point of cathode tab.

## 7. Characteristics

**Table 7. Characteristics**

$T_j = 25\text{ °C}$  unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$V_F$	forward voltage	$I_F = 10\text{ mA}$	[1] -	-	0.9	V
		$I_F = 100\text{ mA}$	[1] -	-	1.1	V


[1] Pulse test:  $t_p \leq 300\text{ }\mu\text{s}$ ;  $\delta \leq 0.02$

Table 8. Characteristics per type; PZU2.4BL to PZU36BL


 $T_j = 25\text{ °C}$  unless otherwise specified

PZU xBL	Sel	Working voltage $V_Z$ (V);		Maximum differential resistance $r_{dif}$ ( $\Omega$ )		Reverse current $I_R$ ( $\mu$ A)		Temperature coefficient $S_Z$ (mV/K);	Diode capacitance $C_d$ (pF) ; $V_R = 0$ V	Non-repetitive peak reverse current $I_{ZSM}$ (A) $t_p = 100\text{ }\mu$ s; square wave; $T_j = 25\text{ °C}$ ; prior to surge
		$I_Z = 5\text{ mA}$		$I_Z = 0.5\text{ mA}$	$I_Z = 5\text{ mA}$			$I_Z = 5\text{ mA}$	$f = 1\text{ MHz}$ ;	$t_p = 100\text{ }\mu$ s; square wave; $T_j = 25\text{ °C}$ ; prior to surge
		Min	Max	Max	Max	Max	$V_R$ (V)	Typ	Max	Max
2.4	B	2.3	2.6	1000	100	50	1	-1.6	450	8
2.7	B	2.5	2.9	1000	100	20	1	-2.0	440	8
	B2	2.65	2.9							
3.0	B	2.80	3.20	1000	95	10	1	-2.1	425	8
	B2	2.95	3.20							
3.3	B	3.10	3.50	1000	95	5	1	-2.4	410	8
	B2	3.25	3.50							
3.6	B	3.40	3.80	1000	90	5	1	-2.4	390	8
	B2	3.55	3.80							
3.9	B	3.70	4.10	1000	90	3	1	-2.5	370	8
	B2	3.87	4.10							
4.3	B	4.01	4.48	1000	90	3	1	-2.5	350	8
	B2	4.15	4.34							
4.7	B	4.42	4.90	800	80	2	1	-1.4	325	8
	B2	4.55	4.75							
5.1	B	4.84	5.37	250	60	2	1.5	0.3	300	5.5
	B2	4.98	5.20							
5.6	B	5.31	5.92	100	40	1	2.5	1.9	275	5.5
	B2	5.49	5.73							
6.2	B	5.86	6.53	80	30	0.5	3	2.7	250	5.5
	B2	6.06	6.33							
6.8	B	6.47	7.14	60	20	0.5	3.5	3.4	215	5.5
	B2	6.65	6.93							
7.5	B	7.06	7.84	60	10	0.5	4	4.0	170	3.5
	B2	7.28	7.60							
8.2	B	7.76	8.64	60	10	0.5	5	4.6	150	3.5
	B2	8.02	8.36							
9.1	B	8.56	9.55	60	10	0.5	6	5.5	120	3.5
	B2	8.85	9.23							
10	B	9.45	10.55	60	10	0.1	7	6.4	110	3.5
	B2	9.77	10.21							
11	B	10.44	11.56	60	10	0.1	8	7.4	108	3
	B2	10.76	11.22							
12	B	11.42	12.60	80	10	0.1	9	8.4	105	3
	B2	11.74	12.24							

PZU xBL	Sel	Working voltage $V_Z$ (V);		Maximum differential resistance $r_{dif}$ ( $\Omega$ )		Reverse current $I_R$ ( $\mu A$ )		Temperature coefficient $S_Z$ (mV/K);	Diode capacitance $C_d$ (pF) ; $V_R = 0$ V	Non-repetitive peak reverse current $I_{ZSM}$ (A) $t_p = 100 \mu s$ ; square wave; $T_j = 25^\circ C$ ; prior to surge
		$I_Z = 5$ mA		$I_Z = 0.5$ mA	$I_Z = 5$ mA			$I_Z = 5$ mA	$f = 1$ MHz;	
		Min	Max	Max	Max	Max	$V_R$ (V)	Typ	Max	
13	B	12.47	13.96	80	10	0.1	10	9.4	103	2.5
	B2	12.91	13.49							
14	B2	13.70	14.30	80	10	0.1	11	10.4	101	2
15	B	13.84	15.52	80	15	0.05	11	11.4	99	2
	B2	14.34	14.98							
16	B	15.37	17.09	80	20	0.05	12	12.4	97	1.5
	B2	15.85	16.51							
18	B	16.94	19.03	80	20	0.05	13	14.4	93	1.5
	B2	17.56	18.35							
20	B	18.86	21.08	100	20	0.05	15	16.4	88	1.5
	B2	19.52	20.39							
22	B	20.88	23.17	100	25	0.05	17	18.4	84	1.3
	B2	21.54	22.47							
24	B	22.93	25.57	120	30	0.05	19	20.4	80	1.3
	B2	23.72	24.78							
27	B	25.1	28.9	150	40	0.05	21	23.4	73	1
30	B	28	32	200	40	0.05	23	26.6	66	1
33	B	31	35	250	40	0.05	25	29.7	60	0.9
36	B	34	38	300	60	0.05	27	33.0	59	0.8

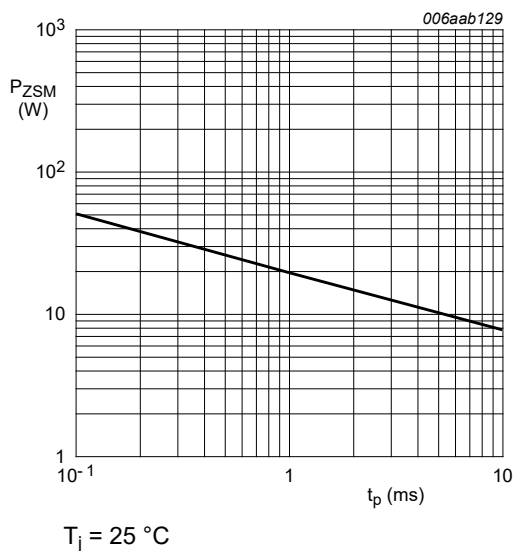

**Fig. 1. Non-repetitive peak reverse power dissipation as a function of pulse duration; maximum values**

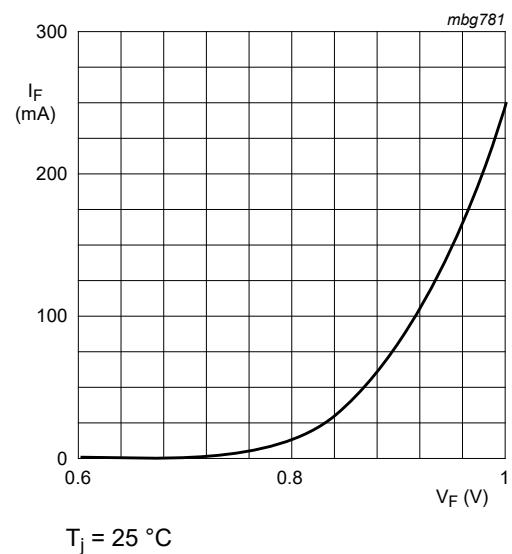

**Fig. 2. Forward current as a function of forward voltage; typical values**

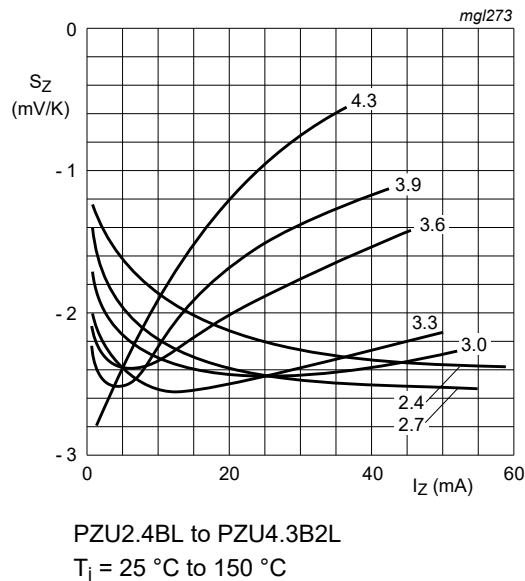


Fig. 3. Temperature coefficient as a function of working current; typical values

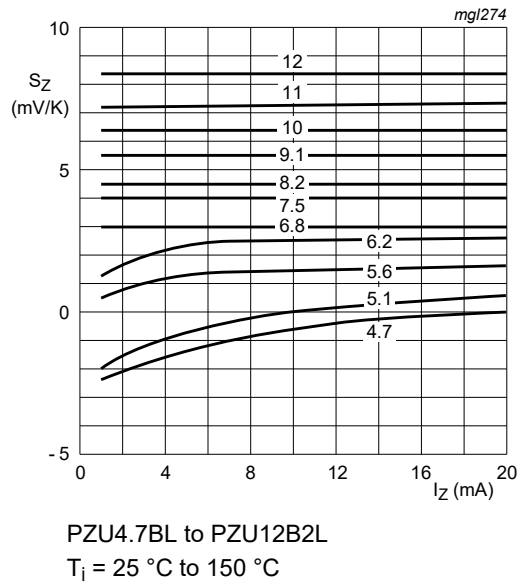


Fig. 4. Temperature coefficient as a function of working current; typical values

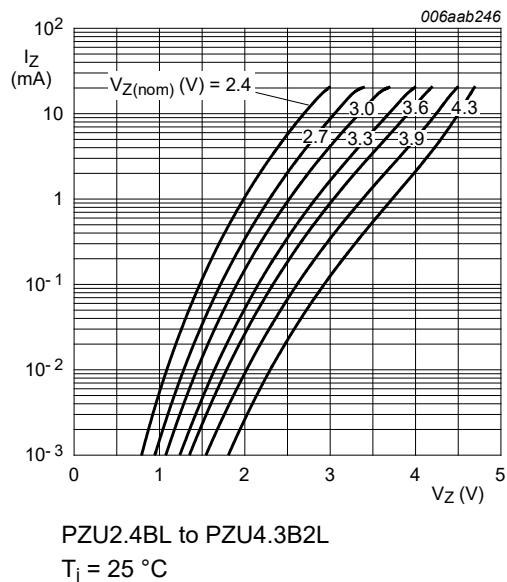


Fig. 5. Working current as a function of working voltage; typical values


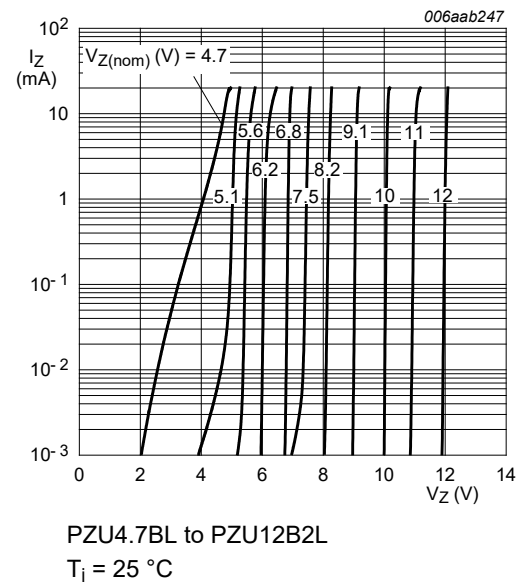


Fig. 6. Working current as a function of working voltage; typical values

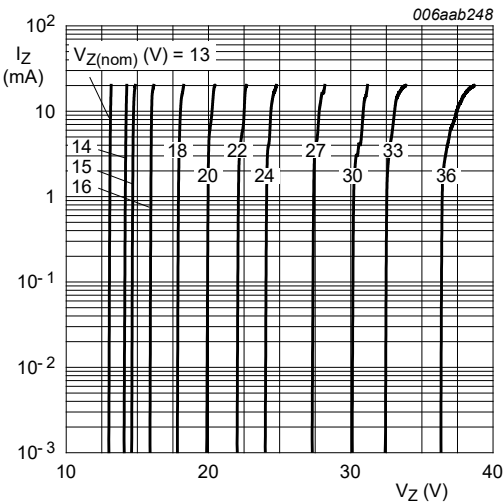

PZU13BL to PZU36BL  
 $T_j = 25\text{ }^{\circ}\text{C}$

Fig. 7. Working current as a function of working voltage; typical values

8. Test information

Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q101 - Stress test qualification for discrete semiconductors, and is suitable for use in automotive applications.

9. Package outline


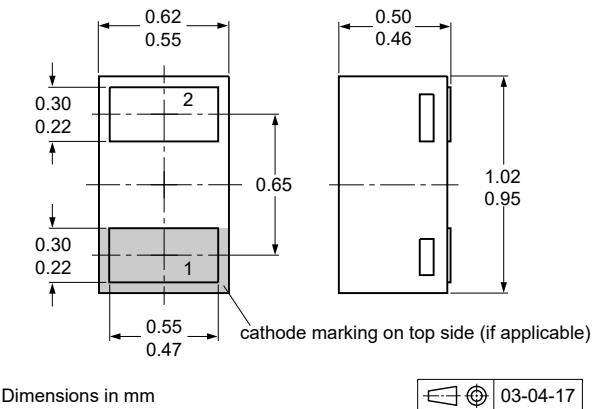


Fig. 8. Package outline SOD882



10. Soldering

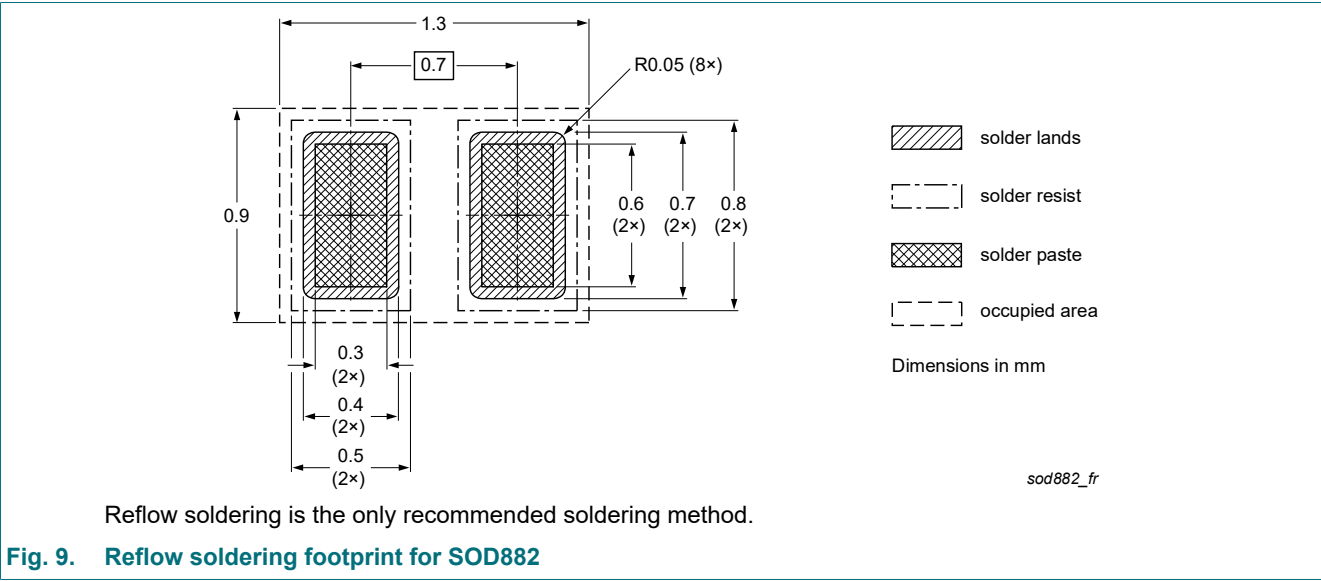

## 11. Revision history

**Table 9. Revision history**

Document ID	Release date	Data sheet status	Change notice	Supersedes
PZUXBL_SER v. 2	20191111	Product data sheet	-	PZUXBL_SER v. 1
Modifications:	<ul style="list-style-type: none"><li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li><li>Legal texts have been adapted to the new company name where appropriate.</li></ul>			
PZUXBL_SER v. 1	20080506	Product data sheet	-	-

## 12. Legal information

### Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or

equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

<b>1. Product profile.....</b>	<b>1</b>
1.1. General description.....	1
1.2. Features.....	1
1.3. Applications.....	1
1.4. Quick reference data.....	1
<b>2. Pinning information.....</b>	<b>2</b>
<b>3. Ordering information.....</b>	<b>2</b>
<b>4. Marking.....</b>	<b>3</b>
<b>5. Limiting values.....</b>	<b>4</b>
<b>6. Thermal characteristics.....</b>	<b>4</b>
<b>7. Characteristics.....</b>	<b>4</b>
<b>8. Test information.....</b>	<b>8</b>
<b>9. Package outline.....</b>	<b>8</b>
<b>10. Soldering.....</b>	<b>9</b>
<b>11. Revision history.....</b>	<b>10</b>
<b>12. Legal information.....</b>	<b>11</b>

© Nexperia B.V. 2019. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 11 November 2019

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nexperia:](#)

[PZU10B2L,315](#) [PZU10BL,315](#) [PZU11B2L,315](#) [PZU11BL,315](#) [PZU12B2L,315](#) [PZU12BL,315](#) [PZU13B2L,315](#)  
[PZU13BL,315](#) [PZU14B2L,315](#) [PZU15B2L,315](#) [PZU15BL,315](#) [PZU16B2L,315](#) [PZU16BL,315](#) [PZU18B2L,315](#)  
[PZU18BL,315](#) [PZU2.4BL,315](#) [PZU2.7B2L,315](#) [PZU2.7BL,315](#) [PZU20B2L,315](#) [PZU20BL,315](#) [PZU22B2L,315](#)  
[PZU22BL,315](#) [PZU24B2L,315](#) [PZU24BL,315](#) [PZU27BL,315](#) [PZU3.0B2L,315](#) [PZU3.0BL,315](#) [PZU3.3B2L,315](#)  
[PZU3.3BL,315](#) [PZU3.6B2L,315](#) [PZU3.6BL,315](#) [PZU3.9B2L,315](#) [PZU3.9BL,315](#) [PZU30BL,315](#) [PZU33BL,315](#)  
[PZU36BL,315](#) [PZU4.3B2L,315](#) [PZU4.3BL,315](#) [PZU4.7B2L,315](#) [PZU4.7BL,315](#) [PZU5.1B2L,315](#) [PZU5.1BL,315](#)  
[PZU5.6B2L,315](#) [PZU5.6BL,315](#) [PZU6.2B2L,315](#) [PZU6.2BL,315](#) [PZU6.8B2L,315](#) [PZU6.8BL,315](#) [PZU7.5B2L,315](#)  
[PZU7.5BL,315](#) [PZU8.2B2L,315](#) [PZU8.2BL,315](#) [PZU9.1B2L,315](#) [PZU9.1BL,315](#) [PZU24B2L-QYL](#) [PZU6.2BL-QYL](#)  
[PZU3.6BL-QYL](#) [PZU3.3BL-QYL](#) [PZU3.9BL-QYL](#) [PZU3.0B2L-QYL](#) [PZU5.1B2L-QYL](#) [PZU33BL-QYL](#) [PZU8.2BL-QYL](#)  
[PZU10B2L-QYL](#) [PZU2.7BL-QYL](#) [PZU20B2L-QYL](#) [PZU7.5BL-QYL](#) [PZU8.2B2L-QYL](#) [PZU13BL-QYL](#) [PZU12B2L-](#)  
[QYL](#) [PZU3.3B2L-QYL](#) [PZU3.6B2L-QYL](#) [PZU2.4BL-QYL](#) [PZU2.7B2L-QYL](#) [PZU30BL-QYL](#) [PZU7.5B2L-QYL](#)  
[PZU27BL-QYL](#) [PZU16B2L-QYL](#) [PZU22B2L-QYL](#) [PZU6.8BL-QYL](#) [PZU18BL-QYL](#) [PZU3.9B2L-QYL](#) [PZU11B2L-QYL](#)  
[PZU4.3B2L-QYL](#) [PZU4.7B2L-QYL](#) [PZU24BL-QYL](#) [PZU15BL-QYL](#) [PZU6.8B2L-QYL](#) [PZU13B2L-QYL](#) [PZU14B2L-](#)  
[QYL](#) [PZU5.6B2L-QYL](#) [PZU18B2L-QYL](#) [PZU9.1B2L-QYL](#) [PZU16BL-QYL](#) [PZU20BL-QYL](#) [PZU6.2B2L-QYL](#)  
[PZU10BL-QYL](#) [PZU12BL-QYL](#) [PZU4.3BL-QYL](#) [PZU15B2L-QYL](#)