



PZUxB series

Zener voltage regulator diodes in a SOD323F package

Rev. 6 — 16 August 2024

Product data sheet

1. General description

General-purpose Zener diodes in a SOD323F (SC-90) very small and flat lead Surface Mounted Device (SMD) plastic package.

2. Features and benefits

- Total power dissipation: 550 mW
- Tolerance series: B: approximately 5 %; B1, B2, B3: sequential, approximately 2 %
- Small plastic package suitable for surface mounted design
- Wide working voltage range: nominal 2.4 V to 51 V
- Very low leakage current for a given reverse voltage for types PZU5.1B - PZU10B
- PZU5.1B2 - 10B: Very low dynamic impedances at low currents, very low leakage current, hard breakdown knee
- PZU11B2 - 51B: Intentional minor rise of leakage current for optimized fast switching and noise reduction [Ref. [AN90031](#)]
- AEC-Q101 qualified

3. Applications

- General regulation functions

4. Quick reference data

Table 1. Quick reference data



Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_F	forward voltage	$I_F = 10 \text{ mA}$ [1]	-	-	0.9	V
P_{tot}	total power dissipation	$T_{amb} \leq 25 \text{ °C}$ [2]	-	-	550	mW

[1] Pulse test: $t_p \leq 300 \text{ }\mu\text{s}$; $\delta \leq 0.02$

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1 cm^2 .

5. Pinning information

Table 2. Pinning

Pin	Description		Simplified outline	Symbol
1	cathode	[1]		 sym068
2	anode			

[1] The marking bar indicates the cathode

6. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
PZU2.4B to PZU51B [1]	SC-90	plastic surface mounted package; 2 leads	SOD323F

[1] The series consists of 105 types with nominal working voltages from 2.4 V to 51 V.

7. Marking

Table 4. Marking codes

Type number	Marking code				Type number	Marking code			
	B	B1	B2	B3		B	B1	B2	B3
PZU2.4	G3	-	-	-	PZU12	GL	FK	HH	KD
PZU2.7	G4	F3	H1	-	PZU13	GM	FL	HJ	KE
PZU3.0	G5	F4	H2	-	PZU14	-	-	HK	-
PZU3.3	G6	F5	H3	-	PZU15	GN	FM	HL	KF
PZU3.6	G7	F6	H4	-	PZU16	GP	FN	HM	KG
PZU3.9	G8	F7	H5	-	PZU18	GQ	FP	HN	KH
PZU4.3	G9	F8	H6	HS	PZU20	GR	FQ	HP	KJ
PZU4.7	GA	F9	H7	HT	PZU22	GS	FR	HQ	KK
PZU5.1	GB	FA	H8	HU	PZU24	GT	FS	HR	KL
PZU5.6	GC	FB	H9	HV	PZU27	GU	-	-	-
PZU6.2	GD	FC	HA	HW	PZU30	GV	-	-	-
PZU6.8	GE	FD	HB	HX	PZU33	GW	-	-	-
PZU7.5	GF	FE	HC	HY	PZU36	GX	-	-	-
PZU8.2	GG	FF	HD	HZ	PZU39	FY	-	J2	-
PZU9.1	GH	FG	HE	KA	PZU43	FZ	-	J3	-
PZU10	GJ	FH	HF	KB	PZU47	GY	-	J4	-
PZU11	GK	FJ	HG	KC	PZU51	GZ	-	J5	-

8. Limiting values

Table 5. Limiting values
In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
I _F	forward current		-	200	mA
I _{ZSM}	non-repetitive peak reverse current		-	see: Table 8	
P _{ZSM}	non-repetitive peak reverse power dissipation		[1] -	40	W
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C	[2] -	310	mW
			[3] -	550	mW
T _j	junction temperature		-	150	°C
T _{amb}	ambient temperature		-65	+150	°C
T _{stg}	storage temperature		-65	+150	°C

- [1] t_p = 100 μs; square wave; T_j = 25 °C prior to surge
[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
[3] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1cm².

9. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
R _{th(j-a)}	thermal resistance from junction to ambient	in free air	[1] -	-	400	K/W
			[2] -	-	230	K/W
R _{th(j-sp)}	thermal resistance from junction to solder point		[3] -	-	55	K/W

- [1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for cathode 1cm².
[3] Soldering point of cathode tab

10. Characteristics

Table 7. Characteristics
T_j = 25 °C unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _F	forward voltage	I _F = 10 mA	[1] -	-	0.9	V
		I _F = 100 mA	[1] -	-	1.1	V

- [1] Pulse test: t_p ≤ 300 μs; δ ≤ 0.02

Table 8. Characteristics per type; PZU2.4B to PZU36B

T_j = 25 °C unless otherwise specified

PZU xxx	Sel	Working voltage V _Z (V); I _Z = 5 mA		Maximum differential resistance r _{dif} (Ω)		Reverse current I _R (μA)		Temperature coefficient S _Z (mV/K); I _Z = 5 mA	Diode capacitance C _d (pF) ; f = 1 MHz; V _R = 0 V	Non-repetitive peak reverse current I _{ZSM} (A) t _p = 100 μs; square wave; T _j = 25 °C ; prior to surge
		Min	Max	I _Z = 0.5 mA	I _Z = 5 mA	Max	V _R (V)	Typ	Max	Max
2.4	B	2.3	2.6	1000	100	50	1	-1.6	450	8
2.7	B	2.5	2.9	1000	100	20	1	-2.0	440	8
	B1	2.5	2.75							
	B2	2.65	2.9							
3.0	B	2.80	3.20	1000	95	10	1	-2.1	425	8
	B1	2.80	3.05							
	B2	2.95	3.20							
3.3	B	3.10	3.50	1000	95	5	1	-2.4	410	8
	B1	3.10	3.35							
	B2	3.25	3.50							
3.6	B	3.40	3.80	1000	90	5	1	-2.4	390	8
	B1	3.40	3.65							
	B2	3.55	3.80							
3.9	B	3.70	4.10	1000	90	3	1	-2.5	370	8
	B1	3.70	3.97							
	B2	3.87	4.10							
4.3	B	4.01	4.48	1000	90	3	1	-2.5	350	8
	B1	4.01	4.21							
	B2	4.15	4.34							
	B3	4.28	4.48							
4.7	B	4.42	4.90	800	80	2	1	-1.4	325	8
	B1	4.42	4.61							
	B2	4.55	4.75							
	B3	4.69	4.90							
5.1	B	4.84	5.37	250	60	2	1.5	0.3	300	5.5
	B1	4.84	5.04							
	B2	4.98	5.20							
	B3	5.14	5.37							

Zener voltage regulator diodes in a SOD323F package

PZU xxx	Sel	Working voltage V _Z (V); I _Z = 5 mA		Maximum differential resistance r _{dif} (Ω)		Reverse current I _R (nA)		Temperature coefficient S _Z (mV/K); I _Z = 5 mA	Diode capacitance C _d (pF) ; f = 1 MHz; V _R = 0 V	Non-repetitive peak reverse current I _{ZSM} (A) t _p = 100 μs; square wave; T _j = 25 °C ; prior to surge
		Min	Max	I _Z = 0.5 mA	I _Z = 5 mA	Max	V _R (V)	Typ	Max	Max
5.6	B	5.31	5.92	100	40	1000	2.5	1.9	275	5.5
	B1	5.31	5.55							
	B2	5.49	5.73							
	B3	5.67	5.92							
6.2	B	5.86	6.53	80	30	500	3	2.7	250	5.5
	B1	5.86	6.12							
	B2	6.06	6.33							
	B3	6.26	6.53							
6.8	B	6.47	7.14	60	20	500	3.5	3.4	215	5.5
	B1	6.47	6.73							
	B2	6.65	6.93							
	B3	6.86	7.14							
7.5	B	7.06	7.84	60	10	500	4	4.0	170	3.5
	B1	7.06	7.36							
	B2	7.28	7.60							
	B3	7.52	7.84							
8.2	B	7.76	8.64	60	10	500	5	4.6	150	3.5
	B1	7.76	8.10							
	B2	8.02	8.36							
	B3	8.28	8.64							
9.1	B	8.56	9.55	60	10	500	6	5.5	120	3.5
	B1	8.56	8.93							
	B2	8.85	9.23							
	B3	9.15	9.55							
10	B	9.45	10.55	60	10	100	7	6.4	110	3.5
	B1	9.45	9.87							
	B2	9.77	10.21							
	B3	10.11	10.55							
11	B	10.44	11.56	60	10	100	8	7.4	108	3
	B1	10.44	10.88							
	B2	10.76	11.22							
	B3	11.10	11.56							
12	B	11.42	12.60	80	10	100	9	8.4	105	3
	B1	11.42	11.90							
	B2	11.74	12.24							
	B3	12.08	12.60							



Zener voltage regulator diodes in a SOD323F package


PZU xxx	Sel	Working voltage V _Z (V); I _Z = 5 mA		Maximum differential resistance r _{dif} (Ω)		Reverse current I _R (nA)		Temperature coefficient S _Z (mV/K); I _Z = 5 mA	Diode capacitance C _d (pF) ; f = 1 MHz; V _R = 0 V	Non-repetitive peak reverse current I _{ZSM} (A) t _p = 100 μs; square wave; T _j = 25 °C ; prior to surge
		Min	Max	I _Z = 0.5 mA	I _Z = 5 mA	Max	V _R (V)	Typ	Max	Max
13	B	12.47	13.96	80	10	100	10	9.4	103	2.5
	B1	12.47	13.03							
	B2	12.91	13.49							
	B3	13.37	13.96							
14	B2	13.70	14.30	80	10	100	11	10.4	101	2
15	B	13.84	15.52	80	15	50	11	11.4	99	2
	B1	13.84	14.46							
	B2	14.34	14.98							
	B3	14.85	15.52							
16	B	15.37	17.09	80	20	50	12	12.4	97	1.5
	B1	15.37	16.01							
	B2	15.85	16.51							
	B3	16.35	17.09							
18	B	16.94	19.03	80	20	50	13	14.4	93	1.5
	B1	16.94	17.70							
	B2	17.56	18.35							
	B3	18.21	19.03							
20	B	18.86	21.08	100	20	50	15	16.4	88	1.5
	B1	18.86	19.70							
	B2	19.52	20.39							
	B3	20.21	21.08							
22	B	20.88	23.17	100	25	50	17	18.4	84	1.3
	B1	20.88	21.77							
	B2	21.54	22.47							
	B3	22.23	23.17							
24	B	22.93	25.57	120	30	50	19	20.4	80	1.3
	B1	22.93	23.96							
	B2	23.72	24.78							
	B3	24.54	25.57							
27	B	25.1	28.9	150	40	50	21	23.4	73	1
30	B	28	32	200	40	50	23	26.6	66	1
33	B	31	35	250	40	50	25	29.7	60	0.9
36	B	34	38	300	60	50	27	33.0	59	0.8

Table 9. Characteristics per type; PZU39B to PZU51B

T_j = 25 °C unless otherwise specified


PZU xxx	Sel	Working voltage V _Z (V)		Maximum differential resistance r _{dif} (Ω)	I _Z = 2 mA	Reverse current I _R (μA)		Temperature coefficient S _Z (mV/K)	Diode capacitance C _d (pF)	Non-repetitive peak reverse current I _{ZSM} (A)
		I _Z = 2 mA		I _Z = 0.5 mA				I _Z = 2 mA	f = 1 MHz; V _R = 0 V	t _p = 100 μs; square wave; T _j = 25 °C ; prior to surge
		Min	Max	Max	Max	Max	V _R (V)	Typ	Max	Max
39	B2	38.20	39.80	350	130	50	27.3	36.4	45	0.7
	B	37.00	41.00							
43	B2	42.10	43.90	375	150	50	30.1	41.2	40	0.6
	B	40.00	46.00							
47	B2	46.10	47.90	375	170	50	32.9	46.1	40	0.5
	B	44.00	50.00							
51	B2	50.00	52.00	400	180	50	35.7	51.0	40	0.4
	B	48.00	54.00							

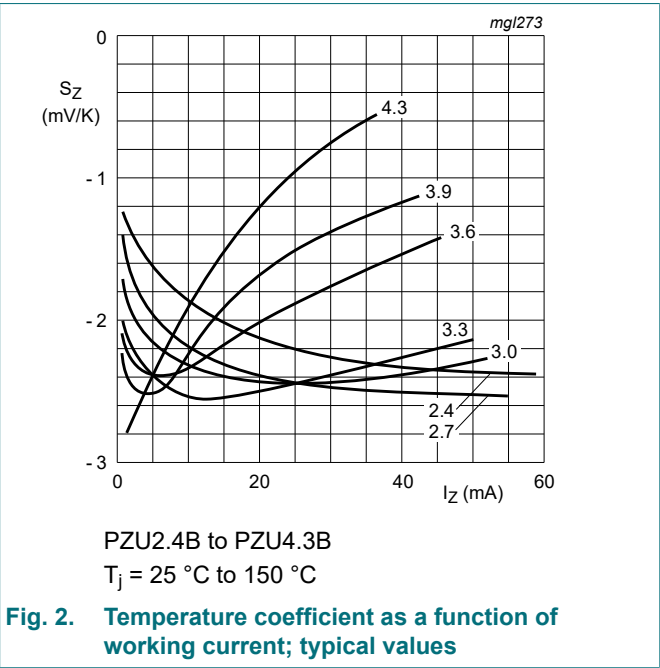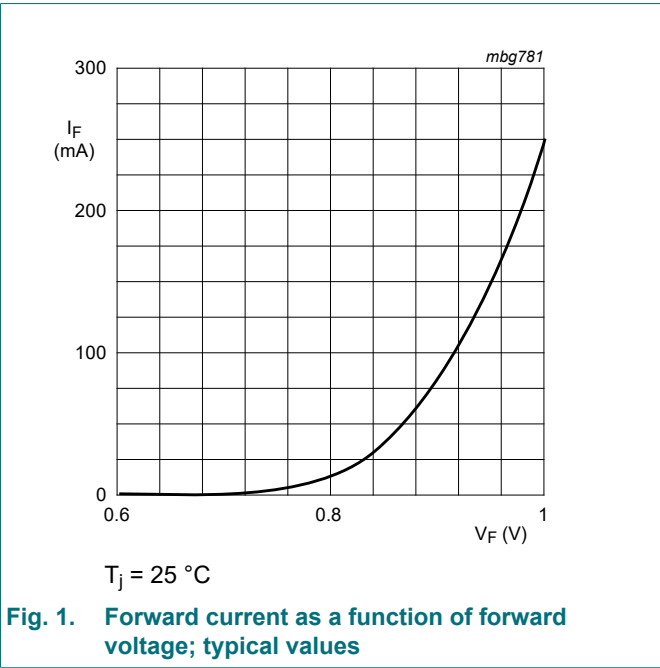

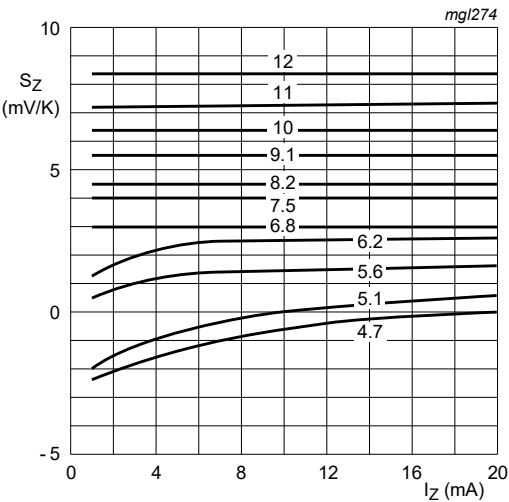


PZU4.7B to PZU12B
 $T_j = 25\text{ }^{\circ}\text{C}$ to $150\text{ }^{\circ}\text{C}$

Fig. 3. Temperature coefficient as a function of working current; typical values

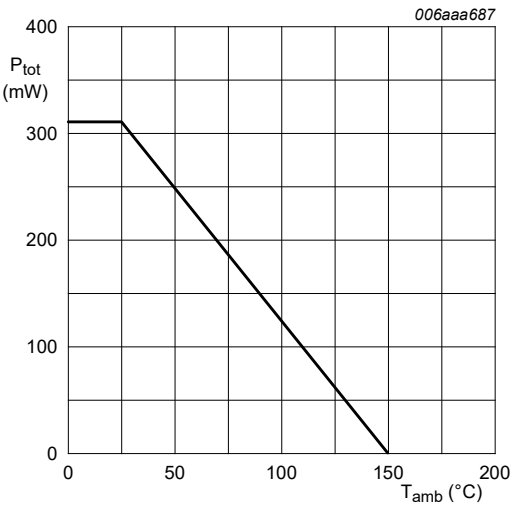


FR4 PCB, standard footprint

Fig. 4. Power derating curve

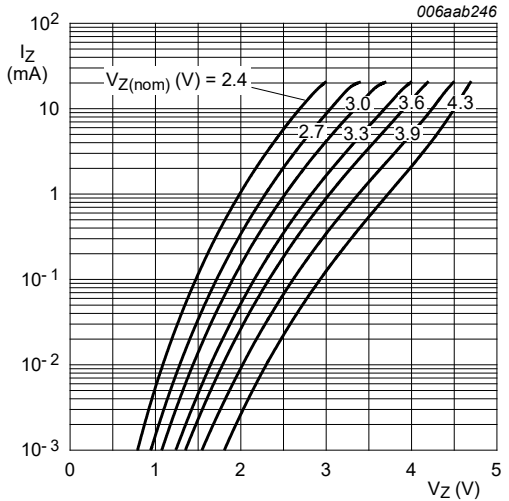



$T_j = 25\text{ }^{\circ}\text{C}$
 $V_Z = 2.4\text{ V}$ to 4.3 V

Fig. 5. Working current as a function of working voltage; typical values

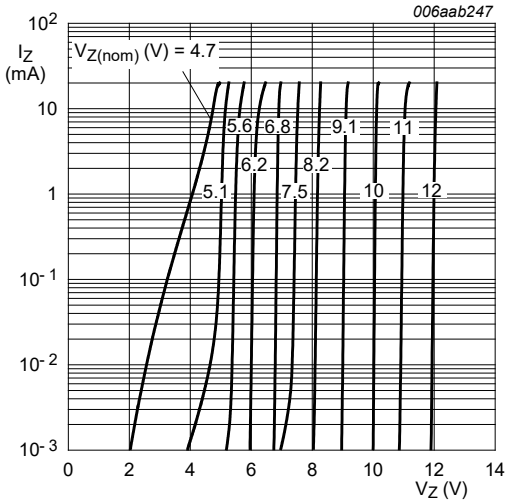

$T_j = 25\text{ }^{\circ}\text{C}$
 $V_Z = 4.7\text{ V}$ to 12 V

Fig. 6. Working current as a function of working voltage; typical values

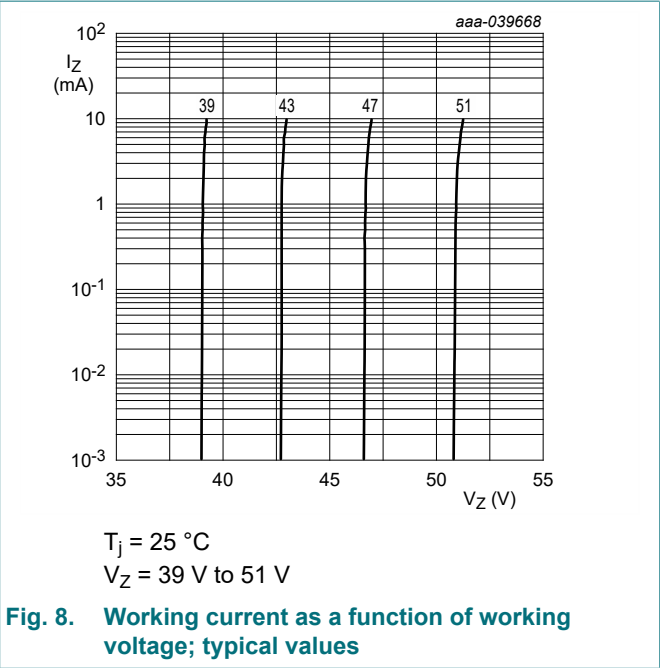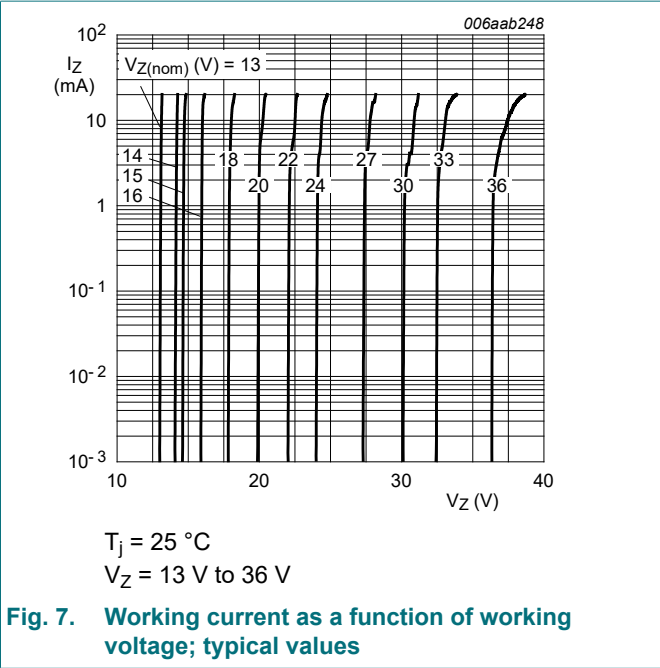


11. Test information


Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard *Q101 - Stress test qualification for discrete semiconductors*, and is suitable for use in automotive applications.

12. Package outline

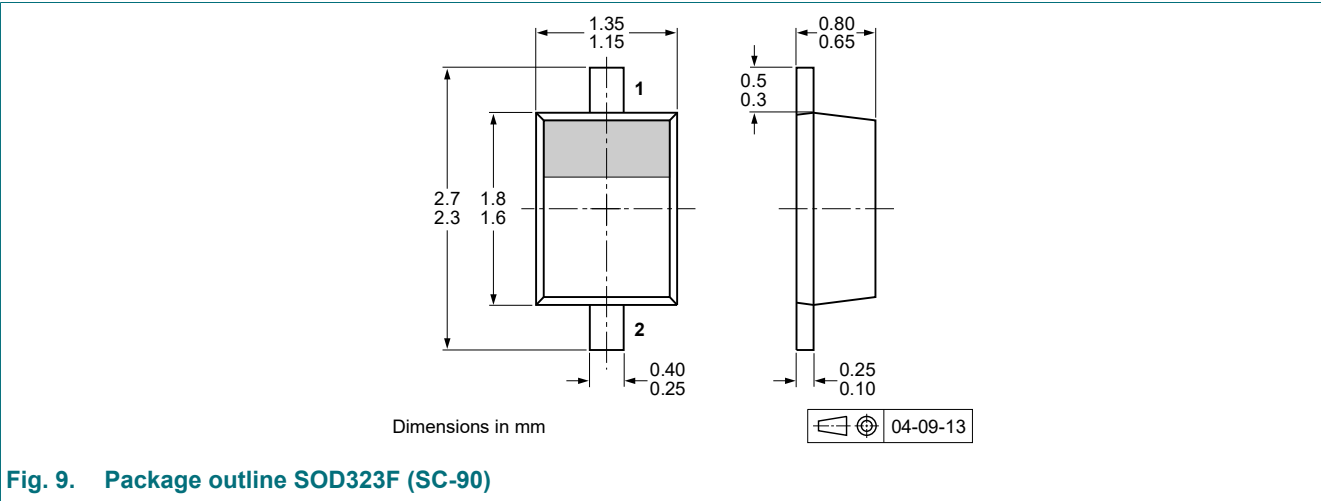

13. Soldering

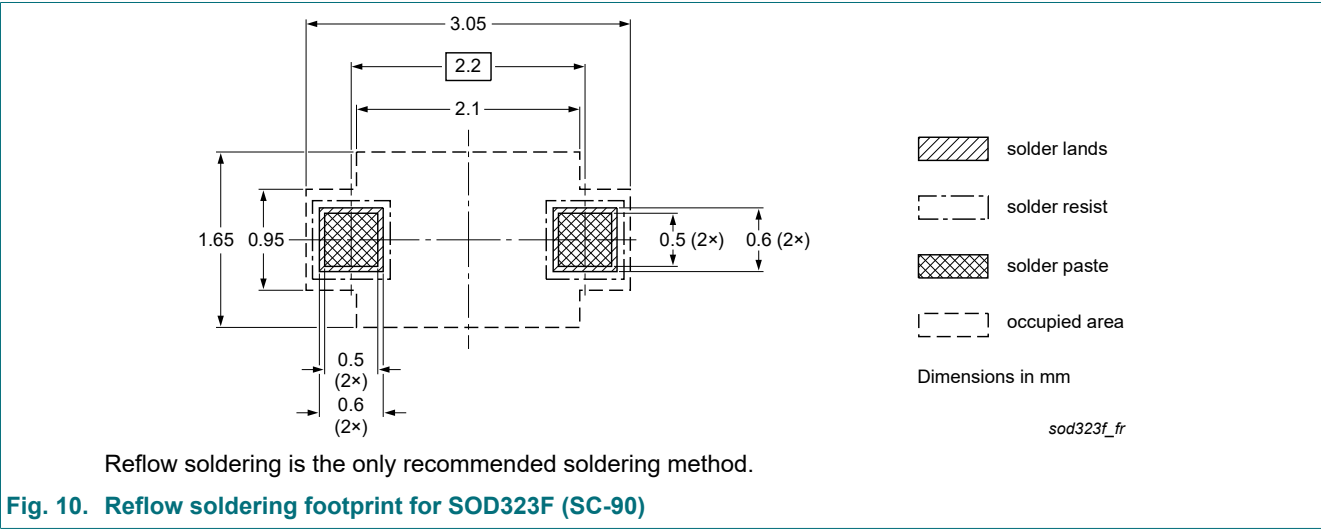

14. Revision history

Table 10. Revision history

Document ID	Release date	Data sheet status	Supersedes
PZUXB_SER v. 6	20240816	Product data sheet	PZUXB_SER v. 5
Modifications:	• Selections B39 to B51 added		
PZUXB_SER v. 5	20201102	Product data sheet	PZUXB_SER v. 4
PZUXB_SER v. 4	20190510	Product data sheet	PZUXB_SER v. 3
PZUXB_SER v. 3	20180115	Product data sheet	PZUXB_SER_2 v. 2
PZUXB_SER_2 v. 2	20091115	Product data sheet	PZUXB_SER_1 v. 1
PZUXB_SER_1 v. 1	20060307	Product data sheet	-

15. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or

equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Contents

1. General description..... 1

2. Features and benefits..... 1

3. Applications..... 1

4. Quick reference data..... 1

5. Pinning information.....2

6. Ordering information.....2

7. Marking.....2

8. Limiting values..... 3

9. Thermal characteristics..... 3

10. Characteristics..... 3

11. Test information..... 9

12. Package outline..... 9

13. Soldering..... 10

14. Revision history..... 11

15. Legal information..... 12

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 16 August 2024

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Nexperia:](#)

[PZU10B1,115](#) [PZU10B2,115](#) [PZU10B3,115](#) [PZU10B,115](#) [PZU11B1,115](#) [PZU11B2,115](#) [PZU11B3,115](#)
[PZU11B,115](#) [PZU12B1,115](#) [PZU12B2,115](#) [PZU12B3,115](#) [PZU12B,115](#) [PZU13B1,115](#) [PZU13B2,115](#) [PZU13B3,115](#)
[PZU13B,115](#) [PZU14B2,115](#) [PZU15B1,115](#) [PZU15B2,115](#) [PZU15B3,115](#) [PZU15B,115](#) [PZU16B1,115](#)
[PZU16B2,115](#) [PZU16B3,115](#) [PZU16B,115](#) [PZU18B1,115](#) [PZU18B2,115](#) [PZU18B3,115](#) [PZU18B,115](#) [PZU2.4B,115](#)
[PZU2.7B1,115](#) [PZU2.7B2,115](#) [PZU2.7B,115](#) [PZU20B1,115](#) [PZU20B2,115](#) [PZU20B3,115](#) [PZU20B,115](#)
[PZU22B1,115](#) [PZU22B2,115](#) [PZU22B3,115](#) [PZU22B,115](#) [PZU24B1,115](#) [PZU24B2,115](#) [PZU24B3,115](#) [PZU24B,115](#)
[PZU27B,115](#) [PZU3.0B1,115](#) [PZU3.0B2,115](#) [PZU3.0B,115](#) [PZU3.3B1,115](#) [PZU3.3B2,115](#) [PZU3.3B,115](#)
[PZU3.6B1,115](#) [PZU3.6B2,115](#) [PZU3.6B,115](#) [PZU3.9B1,115](#) [PZU3.9B2,115](#) [PZU3.9B,115](#) [PZU30B,115](#)
[PZU33B,115](#) [PZU36B,115](#) [PZU4.3B1,115](#) [PZU4.3B2,115](#) [PZU4.3B3,115](#) [PZU4.3B,115](#) [PZU4.7B1,115](#)
[PZU4.7B2,115](#) [PZU4.7B3,115](#) [PZU4.7B,115](#) [PZU5.1B1,115](#) [PZU5.1B2,115](#) [PZU5.1B3,115](#) [PZU5.1B,115](#)
[PZU5.6B1,115](#) [PZU5.6B2,115](#) [PZU5.6B3,115](#) [PZU5.6B,115](#) [PZU6.2B1,115](#) [PZU6.2B2,115](#) [PZU6.2B3,115](#)
[PZU6.2B,115](#) [PZU6.8B1,115](#) [PZU6.8B2,115](#) [PZU6.8B3,115](#) [PZU6.8B,115](#) [PZU7.5B1,115](#) [PZU7.5B2,115](#)
[PZU7.5B3,115](#) [PZU7.5B,115](#) [PZU8.2B1,115](#) [PZU8.2B2,115](#) [PZU8.2B3,115](#) [PZU8.2B,115](#) [PZU9.1B1,115](#)
[PZU9.1B2,115](#) [PZU9.1B3,115](#) [PZU9.1B,115](#) [PZU27B,135](#) [PZU4.7B2,135](#) [PZU5.6BF](#)